



A SINGER INDUSTRIAL COMPANY

Capital Rubber & Gasket

DON'T WAIT, PRODUCTS ARE READY TO SHIP!



CAPITAL RUBBER PRODUCT CATALOG



A SINGER INDUSTRIAL COMPANY

Industrial Hose, Cable, & Ducting Experts



www.capitalrubberco.com

METALFEX STAINLESS STEEL HOSE

TUBE: 316L STAINLESS STEEL

REINFORCEMENT: DOUBLE BRAID 304 STAINLESS STEEL

CONSTRUCTION: ANNUALR STANDARD PITCH



HEX MALE NPT



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
SSB110BTSSMMHX	1"	20'	975
SSB120BTSSMMHX	1"	20'	975
SSB125BTSSMMHX	1"	20'	975
SSB150BTSSMMHX	1"	20'	975

FIX BY FLOAT STAINLESS 150# FLANGES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
SSB2207SS15FLXFL	2"	20'	275
SSB3207SS15FLXFL	3"	20'	275
SSB3207SS15FLXFL	4"	20'	275
SSB6207SS15FLXFL	6"	20'	264
SSB8207SS15FLXFL	8"	20'	275
SSB2107SS15FLXFL	2"	10'	275
SSB3107SS15FLXFL	3"	10'	275
SSB4107SS15FLXFL	4"	10'	275
SSB6107SS15FLXFL	6"	10'	264
SSB8107SS15FLXFL	8"	10'	275
SSB10207SS15FLxFL	10"	20'	275
SSB12207SS15FLxFL	12"	20'	275

FIX BY FLOAT CARBON 150# FLANGES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
SSB2207CS15FLXFL	2"	20'	285
SSB3207CS15FLXFL	3"	20'	285
SSB4207CS15FLXFL	4"	20'	285
SSB6207CS15FLXFL	6"	20'	264
SSB8207CS15FLXFL	8"	20'	285
SSB2107CS15FLXFL	2"	10'	285
SSB3107CS15FLXFL	3"	10'	285
SSB4107CS15FLXFL	4"	10'	285
SSB6107CS15FLXFL	6"	10'	264
SSB8107CS15FLXFL	8"	10'	285
SSB10207SS15FLxFL	10"	20'	285
SSB12207SS15FLxFL	12"	20'	285

UHMW CHEMICAL 250 PSI

TUBE: WHITE FDA UHMWPE

REINFORCEMENT: TWO PLY TEXTILE AND WIRE HELIX

COVER: GREEN EPDM

TEMPERATURE: -40°F to 250°F




MALE BY FEMALE STAINLESS CAMLOCKS




ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
UHM220SSCESSF	2"	20'	250
UHM320SSCESSF	3"	20'	250
UHM420SSCESSF	4"	20'	250
UHM620SSCESSF	6"	20'	250

FIXED BY FLOAT STAINLESS 150# FLANGES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
UHM220SSFYFLSSF	2"	20'	250
UHM320SSFYFLSSF	3"	20'	250
UHM420SSFYFLSSF	4"	20'	250
UHM620SSFYFLSSF	6"	20'	250

FIXED BY FLOAT STAINLESS TURNBACK AND CARBON FLANGES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
UHM220CSFYFLSSF	2"	20'	250
UHM320CSFYFLSSF	3"	20'	250
UHM420CSFYFLSSF	4"	20'	250
UHM620CSFYFLSSF	6"	20'	250

WATER PUMP COMPOSITE 250 PSI

TUBE: POLYPROPYLENE

REINFORCEMENT: MULTI PLIES POLYPROPYLENE FIBER

INNER HELIX: GALVANIZED STEEL

OUTER HELIX: GALVANIZED STEEL

COVER: PVC IMPREGNATED FIBER

TEMPERATURE: -40°F to 212°F



FIX BY FLOAT CARBON 150# FLANGES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
CW-GR-GG-CS220	2"	20'	250
CW-GR-GG-CS320	3"	20'	250
CW-GR-GG-CS420	4"	20'	250
CW-GR-GG-CS610	6"	20'	250
CW-GR-GG-CS620	6"	20'	250
CW-GR-GG-CS810	8"	10'	250
CW-GR-GG-CS820	8"	20'	250
CW-GR-GG-CS1010	10"	10'	250
CW-GR-GG-CS1020	10"	20'	250
CW-GR-GG-CS1200	12"	20'	250

MALE BY FEMALE ALUMINUM CAM LOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
CW-GR-GG-ACE220	2"	20'	250
CW-GR-GG-ACE320	3"	20'	250
CW-GR-GG-ACE420	4"	20'	250
CW-GR-GG-ACE610	6"	20'	250
CW-GR-GG-ACE620	6"	20'	250
CW-GR-GG-ACE810	8"	10'	250
CW-GR-GG-ACE820	8"	20'	250
CW-GR-GG-ACE1010	10"	10'	250
CW-GR-GG-ACE1020	10"	20'	250

PETRO COMPOSITE 250 PSI

TUBE: POLYPROPYLENE

REINFORCEMENT: MULTI PLIES POLYPROPYLENE FIBER

INNER HELIX: GALVANIZED STEEL

OUTER HELIX: GALVANIZED STEEL

COVER: PVC IMPREGNATED FIBER

TEMPERATURE: -40°F to 212°F



FIX BY FLOAT CARBON 150# FLANGES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
CP-BL-GG-CS220	2"	20'	250
CP-BL-GG-CS320	3"	20'	250
CP-BL-GG-CS420	4"	20'	250
CP-BL-GG-CS610	6"	20'	250
CP-BL-GG-CS620	6"	20'	250
CP-BL-GG-CS810	8"	10'	250
CP-BL-GG-CS820	8"	20'	250
CP-BL-GG-CS1010	10"	10'	250
CP-BL-GG-CS1020	10"	20'	250

MALE BY FEMALE ALUMINUM CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
CP-BL-GG-ACE220	2"	20'	250
CP-BL-GG-ACE320	3"	20'	250
CP-BL-GG-ACE420	4"	20'	250
CP-BL-GG-ACE610	6"	20'	250
CP-BL-GG-ACE620	6"	20'	250
CP-BL-GG-ACE810	8"	10'	250
CP-BL-GG-ACE820	8"	20'	250
CP-BL-GG-ACE1010	10"	10'	250
CP-BL-GG-ACE1020	10"	20'	250

VAPOR COMPOSITE 100 PSI

TUBE: POLYPROPYLENE


REINFORCEMENT: MULTI PLIES POLYPROPYLENE FIBER

INNER HELIX: GALVANIZED STEEL

OUTER HELIX: GALVANIZED STEEL

COVER: PVC IMPREGNATED FIBER

TEMPERATURE: -40°F to 212°F

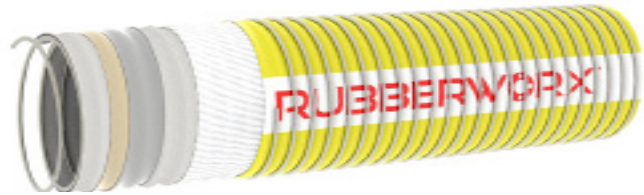

FIX BY FLOAT CARBON 150# FLANGES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
CV-YL-GG-CS220	2"	20'	100
CV-YL-GG-CS320	3"	20'	100
CV-YL-GG-CS420	4"	20'	100
CV-YL-GG-CS610	6"	20'	100
CV-YL-GG-CS620	6"	20'	100
CV-YL-GG-CS810	8"	10'	100
CV-YL-GG-CS820	8"	20'	100

MALE BY FEMALE ALUMINUM CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
CV-YL-GG-ACE210	2"	10'	100
CV-YL-GG-ACE220	2"	20'	100
CV-YL-GG-ACE310	3"	10'	100
CV-YL-GG-ACE320	3"	20'	100
CV-YL-GG-ACE410	4"	10'	100
CV-YL-GG-ACE420	4"	20'	100
CV-YL-GG-ACE610	6"	10'	100
CV-YL-GG-ACE620	6"	20'	100
CV-YL-GG-ACE810	8"	10'	100
CV-YL-GG-ACE820	8"	20'	100

VULCAN COMPOSITE 250 PSI

TUBE: POLYPROPYLENE

REINFORCEMENT: MULTI PLIES POLYPROPYLENE FIBER

INNER HELIX: POLY COATED STEEL


OUTER HELIX: STAINLESS STEEL

COVER: PVC IMPREGNATED FIBER

TEMPERATURE: -40°F to 212°F



FIX BY FLOAT STAINLESS 150# FLANGES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
CC-P-PS-SS220	2"	20'	250
CC-P-PS-SS320	3"	20'	250
CC-P-PS-SS420	4"	20'	250
CC-P-PS-SS620	6"	20'	250
CC-P-PS-SS820	8"	20'	250
CC-P-PS-SS1020	10"	20'	250
CC-P-PS-SS1220	12"	20'	250

MALE BY FEMALE STAINLESS CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
CC-P-PS-SCE220	2"	20'	250
CC-P-PS-SCE320	3"	20'	250
CC-P-PS-SCE420	4"	20'	250
CC-P-PS-SCE620	6"	20'	250
CC-P-PS-SCE820	8"	20'	250
CC-P-PS-SCE1020	10"	20'	250
CC-P-PS-SCE1220	12"	20'	250

PETROLEUM TRANSFER 150 PSI

TUBE: BLACK NITRILE BLEND


REINFORCEMENT: TWO PLY TEXTILE AND WIRE HELIX

COVER: BLACK NITRILE BLEND

TEMPERATURE: -22°F to 180°F




FIXED BY FLOAT CARBON 150# FLANGES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
TT220CSFXFLCSF	2"	20'	150
TT320CSFXFLCSF	3"	20'	150
TT420CSFXFLCSF	4"	20'	150
TT620CSFXFLCSF	6"	20'	150
TT20CSFXFLCSF	8"	20'	150

MALE BY FEMALE ALUMINUM CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
TT210ALCECSF	2"	10'	150
TT220ALCECSF	2"	20'	150
TT310ALCECSF	3"	10'	150
TT320ALCECSF	3"	20'	150
TT410ALCECSF	4"	10'	150
TT420ALCECSF	4"	20'	150
TT620ALCECSF	6"	10'	150
TT820ALCECSF	8"	20'	150

MALE BY FEMALE BRASS CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
TT220BRCECSF	2"	20'	150
TT320BRCECSF	3"	20'	150
TT420BRCECSF	4"	20'	150
TT620BRCECSF	6"	20'	150
TT620BRCECSF	6"	20'	150

OIL SERVICE DOCK 250 PSI

TUBE: BLACK CONDUCTIVE NBR


REINFORCEMENT: MULTI HIGH TENSILE TEXTILE

COVER: BLACK NBR

TEMPERATURE: -40°F to 194°F



**FIX BY FLOAT BUILT IN
CARBON FLANGES**



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
DOCK2X20BIFXFL	2"	20'	250
DOCK3X20BIFXFL	3"	20'	250
DOCK4X10BIFXFL	4"	10'	250
DOCK4X20BIFXFL	4"	20'	250
DOCK4X10BIFXFL	6"	10'	250
DOCK4X20BIFXFL	6"	20'	250
DOCK4X10BIFXFL	8"	10'	250
DOCK4X20BIFXFL	8"	20'	250
DOCK4X10BIFXFL	10"	10'	250
DOCK4X20BIFXFL	10"	20'	250
DOCK4X10BIFXFL	12"	10'	250
DOCK4X20BIFXFL	12"	20'	250
DOCK14X10BIFXFL	14"	10'	250
DOCK14X20BIFXFL	14"	20'	250
DOCK16X10BIFXFL	16"	10'	250
DOCK16X20BIFXFL	16"	20'	250
DOCK18X10BIFXFL	18"	10'	250
DOCK18X20BIFXFL	18"	20'	250

REINFORCED WATER SUCTION AND DISCHARGE

TUBE: PVC


REINFORCEMENT: TEXTILE BRAID

COVER: PVC WITH AN ORANGE PVC HELIX

TEMPERATURE: -13°F to 140°F



MALE BY FEMALE ALUMINUM CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WSKSR220ALCECSL	2"	20'	100
WSKSR320ALCECSL	3"	20'	100
WSKSR420ALCECSL	4"	20'	75
WSKSR620ALCECSL	6"	20'	70
WSKSR820ALCECSL	8"	20'	70

MALE BY FEMALE BAUER COUPLINGS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WSKSR410BACSL	4"	10'	75
WSKSR420BACSL	4"	20'	75
WSKSR610BACSL	6"	10'	70
WSKSR620BACSL	6"	20'	70
WSKSR810BACSL	8"	10'	70
WSKSR820BACSL	8"	20'	70
WSKSR1020BACSL	10"	20'	40

REINFORCED WATER SUCTION AND DISCHARGE

TUBE: PVC


REINFORCEMENT: TEXTILE BRAID

COVER: PVC WITH AN ORANGE PVC HELIX

TEMPERATURE: -13°F to 140°F



FEMALE ALUMINUM CAMLOCK BY MALE PLATED NPT



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WSKSR220ALCKC	2"	20'	100
WSKSR320ALCKC	3"	20'	100
WSKSR420ALCKC	4"	20'	75
WSKSR620ALCKC	6"	20'	70

FEMALE ALUMINUM CAMLOCK BY ROUND HOLE BASKET



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WSKSR220CKCRH	2"	20'	100
WSKSR320CKCRH	3"	20'	100
WSKSR420CKCRH	4"	20'	75
WSKSR620CKCRH	6"	20'	70

RUBBER WATER SUCTION 150 PSI

TUBE: BLACK EPDM


REINFORCEMENT: TWO PLY TEXTILE AND WIRE HELIX

COVER: BLACK EPDM

TEMPERATURE: -22°F to 180°F



MALE BY FEMALE ALUMINUM CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WSRWS220ALCECSL	2"	20'	150
WSRWS320ALCECSL	3"	20'	150
WSRWS420ALCECSL	4"	20'	150
WSRWS620ALCECSL	6"	20'	150
WSRWS820ALCECSL	8"	20'	150

MALE BY FEMALE BAUER COUPLINGS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WSRWS410BACCSL	4"	10'	150
WSRWS420BACCSL	4"	20'	150
WSRWS610BACCSL	6"	10'	150
WSRWS620BACCSL	6"	20'	150
WSRWS810BACCSL	8"	10'	150
WSRWS820BACCSL	8"	20'	150
WSRWS1020BACCSL	10"	20'	150
WSRWS1220BACCSL	12"	20'	150

MALE BY FEMALE ALUMINUM CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WSRWS220ALCKC	2"	20'	150
WSRWS320ALCKC	3"	20'	150
WSRWS420ALCKC	4"	20'	150
WSRWS620ALCKC	6"	20'	150

RUBBER WATER SUCTION 150 PSI

TUBE: BLACK EPDM


REINFORCEMENT: TWO PLY TEXTILE AND WIRE HELIX

COVER: BLACK EPDM

TEMPERATURE: -22°F to 180°F




GROOVED ENDS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WSRWS220PSVICSL	2"	20'	150
WSRWS320PSVICSL	3"	20'	150
WSRWS420PSVICSL	4"	20'	150
WSRWS620PSVICSL	6"	20'	150
WSRWS820PSVICSL	8"	20'	150
WSRWS1020PSVICSL	10"	20'	150
WSRWS1220PSVICSL	12"	20'	150

FIX BY FLOAT CARBON 150# FLANGES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WSRWS310CSFXFCF	3"	10'	150
WSRWS320CSFXFCF	3"	20'	150
WSRWS410CSFXFCF	4"	10'	150
WSRWS420CSFXFCF	4"	20'	150
WSRWS610CSFXFCF	6"	10'	150
WSRWS620CSFXFCF	6"	20'	150
WSRWS810CSFXFCF	8"	10'	150
WSRWS820CSFXFCF	8"	20'	150

150 PSI RED PVC DISCHARGE

TUBE: PVC


REINFORCEMENT: TEXTILE BRAID

COVER: RED PVC

TEMPERATURE: -5°F to 170°F



MALE BY FEMALE ALUMINUM CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDPVCRD200X50CEA	2"	50'	150
WDPVCRD300X50CEA	3"	50'	150
WDPVCRD400X50CEA	4"	50'	150
WDPVCRD600X50CEA	6"	50'	150

MALE BY FEMALE ALUMINUM PIN LUGS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDPVCRD200X50PLA	2"	50'	150
WDPVCRD300X50PLA	3"	50'	150
WDPVCRD400X50PLA	4"	50'	150
WDPVCRD600X50PLA	6"	50'	150



BLUE PVC DISCHARGE

- TUBE: PVC
- REINFORCEMENT: TEXTILE BRAID
- COVER: BLUE PVC
- TEMPERATURE: -5°F to 170°F



MALE BY FEMALE
ALUMINUM CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDPVCBL200X50CEA	2"	50'	80
WDPVCBL300X50CEA	3"	50'	80
WDPVCBL400X50CEA	4"	50'	70
WDPVCBL600X50CEA	6"	50'	60

MALE BY FEMALE
ALUMINUM PIN LUGS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDPVCBL200X50PLA	2"	50'	80
WDPVCBL300X50PLA	3"	50'	80
WDPVCBL400X50PLA	4"	50'	70
WDPVCBL600X50PLA	6"	50'	60



BLACK NITRILE DISCHARGE

TUBE: BLACK NITRILE


REINFORCEMENT: TEXTILE BRAID

COVER: BLACK NITRILE

TEMPERATURE: -40°F to 180°F



MALE BY FEMALE ALUMINUM CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDOR250ALCECSL	2"	50'	250
WDOR350ALCECSL	3"	50'	200
WDOR450ALCECSL	4"	50'	150
WDOR650ALCECSL	6"	50'	150
WDOR850ALCECSL	8"	50'	150

MALE BY FEMALE BAUER



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDOR450BACCSL	4"	50'	150
WDOR650BACCSL	6"	50'	150
WDOR850BACCSL	8"	50'	150
WDOR1050BACCSL	10"	50'	150
WDOR1250BACCSL	12"	50'	150



BLACK NITRILE DISCHARGE

TUBE: BLACK NITRILE


REINFORCEMENT: TEXTILE BRAID

COVER: BLACK NITRILE

TEMPERATURE: -40°F to 180°F




PLATED NIPPLES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDRWD450PSVICSL	4"	50'	150
WDRWD650PSVICSL	6"	50'	150
WDRWD850PSVICSL	8"	50'	150
WDOR1050PSVICSL	10"	50'	150
WDOR1250PSVICSL	12"	50'	150

MALE BY FEMALE BRASS CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDRWD450BRCECSL	4"	50'	150
WDRWD650BRCECSL	6"	50'	150
WDRWD850BRCECSL	8"	50'	150



150 PSI RUGGED CHILLER DISCHARGE

TUBE: BLACK EPDM


REINFORCEMENT: TEXTILE BRAID

COVER: BLACK EPDM

TEMPERATURE: -40°F to 180°F



MALE BY FEMALE ALUMINUM CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDRWD250ALECSF	2"	50'	150
WDRWD350ALECSF	3"	50'	150
WDRWD450ALECSF	4"	50'	150
WDRWD650ALECSF	6"	50'	150

MALE BY FEMALE BRASS CAMLOCKS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDRWD225BRCECSF	2"	25'	150
WDRWD325BRCECSF	3"	25'	150
WDRWD425BRCECSF	4"	25'	150
WDRWD625BRCECSF	6"	25'	150

GROOVED ENDS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDRWD225PSVICSL	2"	25'	150
WDRWD325PSVICSL	3"	25'	150
WDRWD425PSVICSL	4"	25'	150
WDRWD625PSVICSL	6"	25'	150



150 PSI RUGGED CHILLER DISCHARGE

TUBE: BLACK EPDM

REINFORCEMENT: TEXTILE BRAID

COVER: BLACK EPDM

TEMPERATURE: -40°F to 180°F




MALE BY FEMALE BAUERS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDRWD450BACCSL	2"	50'	150
WDRWD650BACCSL	3"	50'	150
WDRWD850BACCSL	4"	20'	150

FIX BY FLOAT CARBON 150# FLANGES



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WDRWD425CSFXFCF	2"	25'	150
WDRWD450CSFXFCF	3"	50'	150
WDRWD625CSFXFCF	4"	25'	150
WDRWD650CSFXFCF	6"	50'	150
WDRWD825CSFXFCF	8"	25'	150
WDRWD850CSFXFCF	8"	50'	150



600 PSI WIRE AIR BRAID

TUBE: SYNTHETIC NBR

REINFORCEMENT: TEXTILE BRAID

COVER: YELLOW SYNTHETIC RUBBER

TEMPERATURE: -22°F to 180°F




FEMALE BY FEMALE GROUND JOINT WITH SPUDS



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
AIRWB20025GJFP2	2"	25'	600
AIRWB20050GJFP2	2"	50'	600
AIRWB30025GJFP2	3"	25'	600
AIRWB30050GJFP2	3"	50'	600

UNIVERSAL CROW FOOT



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
AIRWB20025AM26BU	2"	25'	600
AIRWB20050AM26BU	2"	50'	600



300 PSI JACKHAMMER HOSES

- TUBE: EPDM
- REINFORCEMENT: TEXTILE BRAID
- COVER: RED OR YELLOW EPDM
- TEMPERATURE: -40°F to 210°F



JACKHAMMER HOSE
ASSEMBLY RED



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
AH300-34X50HEY	3/4"	50'	300
AH300-1X50HEY	1"	50'	300

JACKHAMMER HOSE
ASSEMBLY YELLOW



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
AH300-34X50HE	3/4"	50'	300
AH300-1X50HE	1"	50'	300



WHIP CHECKS

HOSE TO HOSE WHIP CHECK



ITEM NUMBER	ID (IN)	LENGTHS (FT)	WORKING PSI
WB1-S	20-1/4"	1/2" - 1-1/4"	200
WA2-S	38"	1-1/2" - 3"	600
WA4-S	44"	4"	600



HOSES, COUPLINGS, & ADAPTERS

CUSTOM HOSE ASSEMBLIES

Do you need something outside of our extensive premade inventory stock? No Problem, Capital Rubber & Gasket makes custom hose assemblies every day. The trained professionals are experts at assembling industrial and hydraulic hose assemblies. With crimping capabilities to 12" in house we can answer most industrial hose needs with a quick turn around.



- ✓ Cam & Grooves
- ✓ Bauers
- ✓ Ground Joints
- ✓ Hammer Unions
- ✓ 150# & 300# Flanges
- ✓ Pipe & Victaulic
- ✓ Dry Lock

COUPLINGS & ADAPTERS

Industrial hoses all connect to something; that's why we have an extensive stock of industrial couplings and adapters. Not only do we stock standard couplings, we also offer custom fabrication capabilities. If you don't see it, no problem, call us and we'll help you out.



- ✓ Manifolds
- ✓ Flange Adapters
- ✓ Specialty Fabrication Assemblies

ALUMINUM CAMLOCKS

**TYPE - A - MALE CAMLOCK
BY FEMALE NPT THREAD**



ITEM NUMBER	ID (IN)	WORKING PSI
AL200A	2"	250
AL300A	3"	150
AL400A	4"	150
AL500A	5"	75
AL600A	6"	75
AL800A	8"	50

**TYPE - B - FEMALE CAMLOCK
BY MALE NPT THREAD**



ITEM NUMBER	ID (IN)	WORKING PSI
AL200B	2"	250
AL300B	3"	150
AL400B	4"	150
AL500B	5"	75
AL600B	6"	75
AL800B	8"	50

**TYPE - C - FEMALE CAMLOCK
BY HOSE SHANK**



ITEM NUMBER	ID (IN)	WORKING PSI
AL200C	2"	250
AL300C	3"	150
AL400C	4"	150
AL500C	5"	75
AL600C	6"	75
AL800C	8"	50

ALUMINUM CAMLOCKS

**TYPE - D - FEMALE CAMLOCK X
FEMALE NPT THREAD**



ITEM NUMBER	ID (IN)	WORKING PSI
AL200D	2"	250
AL300D	3"	150
AL400D	4"	150
AL500D	5"	75
AL600D	6"	75
AL800D	8"	50

**TYPE - E - MALE CAMLOCK
BY HOSE SHANK**



ITEM NUMBER	ID (IN)	WORKING PSI
AL200E	2"	250
AL300E	3"	150
AL400E	4"	150
AL500E	5"	75
AL600E	6"	75
AL800E	8"	50


**TYPE - F - MALE CAMLOCK
BY MALE NPT**



ITEM NUMBER	ID (IN)	WORKING PSI
AL200F	2"	250
AL300F	3"	150
AL400F	4"	150
AL500F	5"	75
AL600F	6"	75
AL800F	8"	50

ALUMINUM CAMLOCKS

TYPE - DP - DUST PLUG

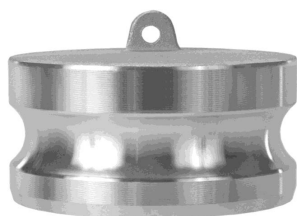

ITEM NUMBER	ID (IN)	WORKING PSI
AL200DP	2"	250
AL300DP	3"	150
AL400DP	4"	150
AL500DP	5"	75
AL600DP	6"	75
AL800DP	8"	50

TYPE - DC - DUST CAP



ITEM NUMBER	ID (IN)	WORKING PSI
AL200DC	2"	250
AL300DC	3"	150
AL400DC	4"	150
AL500DC	5"	75
AL600DC	6"	75
AL800DC	8"	50

TYPE - AA - MALE CAMLOCK BY
MALE CAMLOCK



ITEM NUMBER	ID (IN)	WORKING PSI
AL200AA	2"	250
AL300AA	3"	150
AL400AA	4"	150
AL500AA	5"	75
AL600AA	6"	75
AL800AA	8"	50

ALUMINUM CAMLOCKS

TYPE - DD- FEMALE CAMLOCK
BY FEMALE CAMLOCK



ITEM NUMBER	ID (IN)	WORKING PSI
AL200DD	2"	250
AL300DD	3"	150
AL400DD	4"	150
AL500DD	5"	75
AL600DD	6"	75
AL800DD	8"	50

TYPE - DA - FEMALE CAMLOCK
BY MALE CAMLOCK REDUCER



ITEM NUMBER	ID (IN)	WORKING PSI
AL200300DA	2"	250
AL300200DA	3"	150
AL300400DA	4"	150
AL400300DA	5"	75
AL600400DA	6"	75
AL800600DA	8"	50

ALUMINUM CAMLOCKS

TYPE - DFLG- FEMALE CAMLOCK
BY FEMALE CAMLOCK

ITEM NUMBER	ID (IN)	WORKING PSI
FLG-2-D-AL	2"	250
FLG-3-D-AL	3"	150
FLG-4-D-AL	4"	150
FLG-6-D-AL	6"	75
FLG-8-D-AL	8"	50

TYPE - AFLG- MALE CAMLOCK BY
MALE CAMLOCK

ITEM NUMBER	ID (IN)	WORKING PSI
FLG-2-A-AL	2"	250
FLG-3-A-AL	3"	150
FLG-4-A-AL	4"	150
FLG-6-A-AL	6"	75
FLG-8-A-AL	8"	50

BRASS CAMLOCKS

**TYPE - A - MALE CAMLOCK
BY FEMALE NPT THREAD**



ITEM NUMBER	ID (IN)	WORKING PSI
BR200A	2"	250
BR300A	3"	125
BR400A	4"	100
BR500A	5"	75
BR600A	6"	75
BR800A	8"	50

**TYPE - B - FEMALE CAMLOCK
BY MALE NPT THREAD**



ITEM NUMBER	ID (IN)	WORKING PSI
BR200B	2"	250
BR300B	3"	125
BR400B	4"	100
BR500B	5"	75
BR600B	6"	75
BR800B	8"	50

**TYPE - C - FEMALE CAMLOCK
BY HOSE SHANK**



ITEM NUMBER	ID (IN)	WORKING PSI
BR200C	2"	250
BR300C	3"	125
BR400C	4"	100
BR500C	5"	75
BR600C	6"	75
BR800C	8"	50

BRASS CAMLOCKS

**TYPE - D - FEMALE CAMLOCK X
FEMALE NPT THREAD**



ITEM NUMBER	ID (IN)	WORKING PSI
BR200D	2"	250
BR300D	3"	125
BR400D	4"	100
BR500D	5"	75
BR600D	6"	75
BR800D	8"	50

**TYPE - E - MALE CAMLOCK
BY HOSE SHANK**



ITEM NUMBER	ID (IN)	WORKING PSI
BR200E	2"	250
BR300E	3"	125
BR400E	4"	100
BR500E	5"	75
BR600E	6"	75
BR800E	8"	50

**TYPE - F - MALE CAMLOCK
BY MALE NPT**



ITEM NUMBER	ID (IN)	WORKING PSI
BR200F	2"	250
BR300F	3"	125
BR400F	4"	100
BR500F	5"	75
BR600F	6"	75
BR800F	8"	50

BRASS CAMLOCKS

TYPE - DP - DUST PLUG



ITEM NUMBER	ID (IN)	WORKING PSI
BR200DP	2"	250
BR300DP	3"	125
BR400DP	4"	100
BR500DP	5"	75
BR600DP	6"	75
BR800DP	8"	50

TYPE - DC - DUST CAP



ITEM NUMBER	ID (IN)	WORKING PSI
BR200DC	2"	250
BR300DC	3"	125
BR400DC	4"	100
BR500DC	5"	75
BR600DC	6"	75
BR800DC	8"	50

STAINLESS STEEL CAMLOCKS

**TYPE - A - MALE CAMLOCK
BY FEMALE NPT THREAD**



ITEM NUMBER	ID (IN)	WORKING PSI
SS200A	2"	250
SS300A	3"	200
SS400A	4"	100
SS500A	5"	100
SS600A	6"	100
SS800A	8"	50

**TYPE - B - FEMALE CAMLOCK
BY MALE NPT THREAD**



ITEM NUMBER	ID (IN)	WORKING PSI
SS200B	2"	250
SS300B	3"	200
SS400B	4"	100
SS500B	5"	100
SS600B	6"	100
SS800B	8"	50

**TYPE - C - FEMALE CAMLOCK
BY HOSE SHANK**



ITEM NUMBER	ID (IN)	WORKING PSI
SS200C	2"	250
SS300C	3"	200
SS400C	4"	100
SS500C	5"	100
SS600C	6"	100
SS800C	8"	50

STAINLESS STEEL CAMLOCKS

**TYPE - D - FEMALE CAMLOCK X
FEMALE NPT THREAD**



ITEM NUMBER	ID (IN)	WORKING PSI
SS200D	2"	250
SS300D	3"	200
SS400D	4"	100
SS500D	5"	100
SS600D	6"	100
SS800D	8"	50

**TYPE - E - MALE CAMLOCK
BY HOSE SHANK**



ITEM NUMBER	ID (IN)	WORKING PSI
SS200E	2"	250
SS300E	3"	200
SS400E	4"	100
SS500E	5"	100
SS600E	6"	100
SS800E	8"	50

**TYPE - F - MALE CAMLOCK
BY MALE NPT**



ITEM NUMBER	ID (IN)	WORKING PSI
SS200F	2"	250
SS300F	3"	200
SS400F	4"	100
SS500F	5"	100
SS600F	6"	100
SS800F	8"	50

STAINLESS STEEL CAMLOCKS

TYPE - DP - DUST PLUG



ITEM NUMBER	ID (IN)	WORKING PSI
SS200DP	2"	250
SS300DP	3"	200
SS400DP	4"	100
SS500DP	5"	100
SS600DP	6"	100
SS800DP	8"	50

TYPE - DC - DUST CAP



ITEM NUMBER	ID (IN)	WORKING PSI
SS200DC	2"	250
SS300DC	3"	200
SS400DC	4"	100
SS500DC	5"	100
SS600DC	6"	100
SS800DC	8"	50

TYPE - AA - MALE CAMLOCK
BY MALE CAMLOCK



ITEM NUMBER	ID (IN)	WORKING PSI
SS200AA	2"	250
SS300AA	3"	200
SS400AA	4"	100
SS500AA	5"	100
SS600AA	6"	100
SS800AA	8"	50

STAINLESS STEEL CAMLOCKS

**TYPE - DD - FEMALE CAMLOCK
BY FEMALE CAMLOCK**



ITEM NUMBER	ID (IN)	WORKING PSI
SS200DD	2"	250
SS300DD	3"	200
SS400DD	4"	100
SS500DD	5"	100
SS600DD	6"	100
SS800DD	8"	50

**TYPE - AFLG - MALE CAMLOCK
BY MALE CAMLOCK**



ITEM NUMBER	ID (IN)	WORKING PSI
FLG-2-A-AL	2"	250
FLG-3-A-AL	3"	200
FLG-4-A-AL	4"	100
FLG-6-A-AL	6"	100
FLG-8-A-AL	8"	100

**TYPE - DFLG - FEMALE CAMLOCK
BY FEMALE CAMLOCK**



ITEM NUMBER	ID (IN)	WORKING PSI
FLG-2-D-AL	2"	250
FLG-3-D-AL	3"	200
FLG-4-D-AL	4"	100
FLG-6-D-AL	6"	100
FLG-8-D-AL	8"	100

STAINLESS STEEL CAMLOCKS

TYPE - DA - FEMALE CAMLOCK
BY MALE CAMLOCK REDUCER



ITEM NUMBER	ID (IN)	WORKING PSI
SS200300DA	2" X 3"	250
SS300200DA	3" X 2"	200
SS300400DA	3" X 4"	100
SS400300DA	4" X 3"	100
SS600400DA	6" X 4"	100
SS800600DA	8" X 6"	50



HVAC IS OUR BUSINESS

SAVE TIME WITH OUR HVAC INVENTORY

Capital Rubber's team are experts in HVAC products from heating and cooling to air transfer and couplings and adapters.

When its time to prepare for a job, waiting for ducting and adapters to be manufactured or shipped is the last thing you want to do. Capital Rubber is familiar with your industry and stocks the ducting, hose, and adapters to take care of your job requirements now.



✓ Air Transfer Ducting

✓ Return Air Ducting

✓ Heater Ducting

✓ Ceiling Adapters

✓ Connection Adapters

✓ Chiller Coolant Hose

✓ Power Transmission Belts
For Air Conditioning Units

CONTACT US ABOUT YOUR HVAC NEEDS

We have significant inventories of air transfer ducting, return air ducting, heater ducting, ceiling tile adapters, and other connection adapters. All our ducting is sewn not thermally sealed to provide you with ducting that will last through rugged applications. We also carry chiller coolant hose and power transmission belts for air conditioning units. Contact us today for your ducting, hose, and belting needs.

AIRMAX SUPPLY DUCT

TUBE: PVC POLYESTER

REINFORCEMENT: CARBON STEEL HELIX

COVER: YELLOW & BLACK POLYESTER

TEMPERATURE: -20°F to 180°F

OPTIONS: SEWN HEAVY WEAR STRIP

OPTIONS: WIRE ROPE COUPLING

AIRMAX YELLOW & BLACK
SUPPLY DUCT



AIRMAX WHITE
SUPPLY DUCT



AIRMAX SUPPLY DUCT

TUBE: PVC POLYESTER

REINFORCEMENT: CARBON STEEL HELIX

COVER: WHITE PVC POLYESTER

TEMPERATURE: -20°F to 180°F

OPTIONS: SEWN HEAVY WEAR STRIP

OPTIONS: WIRE ROPE COUPLING

ITEM NUMBER	ID (IN)	LENGTHS (FT)	PITCH
DUCT10X25YBSN	10"	25'	6"
DUCT12X25YBSN	12"	25'	6"
DUCT14X25YBSN	14"	25'	6"
DUCT16X25YBSN	16"	25'	6"
DUCT18X25YBSN	18"	25'	6"
DUCT20X25YBSN	20"	25'	6"

ITEM NUMBER	ID (IN)	LENGTHS (FT)	PITCH
DUCT10X25WHSN	10"	25'	6"
DUCT12X25WHSN	12"	25'	6"
DUCT14X25WHSN	14"	25'	6"
DUCT16X25WHSN	16"	25'	6"
DUCT18X25WHSN	18"	25'	6"
DUCT20X25WHSN	20"	25'	6"

AIRMAX HEATER DUCT

TUBE: POLYURETHANE

REINFORCEMENT: CARBON STEEL HELIX

COVER: BLACK PVC POLYESTER

TEMPERATURE: -60°F to 400°F

OPTIONS: SEWN HEAVY WEAR STRIP

OPTIONS: WIRE ROPE COUPLING

AIRMAX HEATER DUCT



AIRMAX INSULATED DUCT



AIRMAX INSULATED DUCT

TUBE: PVC POLYESTER

REINFORCEMENT: CARBON STEEL HELIX

COVER: YELLOW & BLACK PVC POLYESTER

TEMPERATURE: -20°F to 180°F

OPTIONS: SEWN HEAVY WEAR STRIP

OPTIONS: WIRE ROPE COUPLING

ITEM NUMBER	ID (IN)	LENGTHS (FT)	PITCH
DUCT10X25BLK-HT	10"	25'	6"
DUCT12X25BLK-HT	12"	25'	6"
DUCT14X25BLK-HT	14"	25'	6"
DUCT16X25BLK-HT	16"	25'	6"
DUCT18X25BLK-HT	18"	25'	6"
DUCT20X25BLK-HT	20"	25'	6"

ITEM NUMBER	ID (IN)	LENGTHS (FT)	PITCH
DUCT10X25WH-INS	10"	25'	6"
DUCT12X25WH-INS	12"	25'	6"
DUCT14X25WH-INS	14"	25'	6"
DUCT16X25WH-INS	16"	25'	6"
DUCT18X25WH-INS	18"	25'	6"
DUCT20X25WH-IN	20"	25'	6"

AIRMAX RETURN DUCTING

TUBE: POLYURETHANE

REINFORCEMENT: CARBON STEEL HELIX


COVER: PVC POLYESTER

TEMPERATURE: -20°F to 180°F

OPTIONS: SEWN HEAVY WEAR STRIP

OPTIONS: WIRE ROPE COUPLING

AIRMAX D0042



ITEM NUMBER	ID (IN)	LENGTHS (FT)	PITCH
DUCT20X25W0-RD	20"	25'	4"

AIRMAX D0032



ITEM NUMBER	ID (IN)	LENGTHS (FT)	PITCH
DUCT20X25GW-RD	20"	25'	3"

AIRMAX DUCT ADAPTERS

DUCTING Y'S



ITEM NUMBER	INLET	OUTLET 1	OUTLET 2	END	COLOR
DUCT12Y-WH	12"	12"	12"	ROPE	WHITE
DUCT12Y-YB	12"	12"	12"	ROPE	YELLOW
DUCT2012WYE-YW	20"	12"	12"	NA	YELLOW
DUCT20Y-YB	20"	20"	20"	NA	YELLOW
DUCT20W	20"	20"	20"	NA	WHITE

CEILING TILE KITS



ITEM NUMBER	CEILING TILE	DUCT	END	COLOR
CEILING-TILE-KIT	24" X 12"	12" X 8"	BUCKLES BY WIRE ROPE	WHITE
CEILING-TILE-KIT	24" X 12"	12" X 8"	BUCKLES BY WIRE ROPE	WHITE
CEILING-TILE-KIT	24" X 12"	12" X 10"	BUCKLES BY WIRE ROPE	BLACK
CEILING-TILE-KIT	24" X 12"	12" X 10"	BUCKLES BY WIRE ROPE	BLACK

BLOWER TUBING



ITEM NUMBER	DIAMETER USED FOR	TUBING CIRCUMFERENCE	LENGTH	PERFORATED	COLOR
TUBER-BLOWER18	12"	12"	1000'	NO	CLEAR
TUBER-BLOWER22	16"	22"	750'	NO	CLEAR
TUBER-BLOWER24	18"	24"	600'	NO	CLEAR
TUBER-BLOWER32	20"	32"	500'	NO	CLEAR
TUBER-BLOWER32	20"	32"	500'	YES	CLEAR

POWER IS OUR BUSINESS

POWER CABLES, EXTENSIONS, AND MORE

Capital Rubber is dedicated to supplying best in quality power and welding cable products when you need them. When jobs arise you don't have time to wait, Capital Rubber has an extensive inventory of power supply cable, 5 wire cable, welding extension cables, stingers, and grounding clamps.



✓ Power Cable

✓ 5 Wire Cable

✓ Welding Cable

✓ Extensions

✓ Clamps

✓ Stinger

CONTACT US ABOUT YOUR POWER & WELDING CABLE NEEDS

If you need custom assemblies or private branded color cover, we can help. If you are looking for accessories including bridges and spider boxes, we have you covered. We use domestic sourcing for cable and components so you know you are getting the best in class for your job. If you are in need of power and welding cable give our expert team a call.

POWERFLEX - TYPE W

Powerflex is an industrial grade, portable power cable primarily used within environments requiring permanent or temporary power supply.

Durable and versatile, the cable is also commonly deployed for heavy-use applications, including rental, mining, A/C systems, and motor battery leads. DURAFLEX is UL listed, RoHS compliant, and manufactured in the USA.

✓ BARE ASTM CLASS K COPPER

✓ SEPARATORS: PAPER (CONDUCTOR) AND MESH (INSULATION)

✓ INSULATED WITH LSHF EPDM COMPOUND



✓ ROPE-LAY, BUNCH-STRANDED 30 AWG COPPER CONDUCTOR

✓ JACKETED WITH CPE COMPOUND

✓ UL, cULus, and CSA LISTED

✓ NEMA, MSHA, AND RoHS

✓ RATED FOR 600 V; 2,000 V

✓ -40°C to 90°C (-40°F to 194°F)

POWERFLEX ASSEMBLY WITH MALE X FEMALE CONNECTOR



ITEM NUMBER	AWG	LENGTH	INSULATION	OD	AMPACITY	LBS/1K'
GEN-4/0X50TWCL	4/0	50'	.095"	.906"	405A	908

STAGEFLEX - 5 WIRE

Stageflex is an industrial grade, portable power cable primarily used within entertainment power and lighting.

Durable and versatile, the cable is also commonly deployed for heavy-use applications, including rental, mining, A/C systems, and motor battery leads. Stageflex is UL listed, RoHS compliant, and manufactured in the USA.

- ✓ BARE ASTM CLASS K COPPER

✓ SEPARATORS: PAPER (CONDUCTOR) AND MESH (INSULATION)


✓ INSULATED WITH LSHF EPDM COMPOUND
- ✓ ROPE-LAY, BUNCH-STRANDED 30 AWG COPPER CONDUCTOR

✓ JACKETED WITH CPE COMPOUND

✓ UL, cULus, and CSA LISTED

✓ NEMA, MSHA, AND RoHS

✓ RATED FOR 600 V

✓ -50°C to 105°C (-58°F to 221°F)
- 

STAGEFLEX ASSEMBLY WITH MALE X FEMALE CONNECTOR



ITEM NUMBER	AWG	LENGTH	INSULATION	OD	AMPACITY	LBS/1K'
GEN-4/0X50TWCL	#2	50'	.060"	.620"	190A	313

SPIDERBOX CABLE

Spiderbox multi-conductor, plug and play cables are very user-friendly and can reduce the number of cable needed to a jobsite.

Durable and versatile, the cable is also commonly deployed for heavy-use applications including rental, mining, A/C systems, and motor battery leads. Spiderbox is UL listed, RoHS compliant, and manufactured in the USA.

- ✓

BARE ASTM CLASS K COPPER
- ✓

SEPARATORS: PAPER (CONDUCTOR) AND MESH (INSULATION)
- ✓

INSULATED WITH LSHF EPDM COMPOUND
- ✓

ROPE-LAY, BUNCH-STRANDED 30 AWG COPPER CONDUCTOR
- ✓


JACKETED WITH CPE COMPOUND
- ✓

UL, cULus, and CSA LISTED
- ✓

NEMA, MSHA, AND RoHS
- ✓

RATED FOR 600 V
- ✓

-50°C to 105°C (-58°F to 221°F)



SPIDERBOX CABLE



ITEM NUMBER	AWG	LENGTH	INSULATION	OD	LBS/1K'
GEN-SPIDERCBL	6/4	50'	0.72"	0.85	800

SPIDERBOX & CABLE RAMP

The temporary power spiderbox is designed to safely distribute temporary power in areas such as construction sites and other job site environments. cULus listed for outdoor use and designed to stand up to the toughest workplace conditions.

Our five-channel, heavy-duty rubber cable protector keeps up to five cables, hoses, or wires protected from vehicle traffic. The cable protector has four channels that can accommodate cords with outside diameters up to 1-1/2" and a larger center channel to accommodate hoses and cables up to 1-5/8" in diameter.

TEMPORARY POWER SPIDERBOX



ITEM NUMBER	POWER INLET	POWER OUTLET	RECEPTACLES	STACKABLE
SPIDERBOX-UGSX	50A CS63	30 AMP Nema I6-30	Nema 5-20 125V 20A slot single receptacles with dedicated GFCI protection	YES
SPIDERBOX-TLSX	50A CS63	30 AMP Nema I6-30	Nema L5-20 125V 20A 2P3W Twist Lock Single Receptacles with Dedicated GFCI Protection	YES

FIVE-CHANNEL CABLE RAMP




ITEM NUMBER	LENGTH (IN)	WIDTH (IN)	HEIGHT (IN)	NUMBER OF CHANNELS
SPIDERBOX-???	35-1/2"	19-3/4"	2"	5

WELDFLEX INDUSTRIAL WELDING CABLE

Weldflex is the industry's leader of industrial welding cable.

Highly durable and versatile, the cable is designed for use in stingers/whips, leads, and ground clamp welding assemblies as well as battery applications such as chargers and wire harnesses.

- ✓ BARE ASTM CLASS K COPPER
- ✓ WRAPPED PAPER SEPARATORS
- ✓ INSULATED WITH LSHF EPDM COMPOUND
- ✓ REACH, RoHS, CMRT, AND PROP 65 COMPLIANT
- ✓ SUITABLE FOR BATTERY USE PER UL 558 AND 583
- ✓ ROPE-LAY, BUNCH-STRANDED 30 AWG COPPER CONDUCTOR
- ✓ JACKETED LOW-SMOKE, HALOGEN-FREE EPDMUL
- ✓ SAE J1127 COMPLIANT (#6 to 250 MCM)
- ✓ NEC ARTICLE 630 (Electric Welders)
- ✓ -50°C to 105°C (-58°F to 221°F)



AVAILABLE WELDING CABLE COLOR OPTIONS

COLOR
BLUE
YELLOW
GREEN
ORANGE

WELDFLEX CLAMP AND STINGER

WELDFLEX ASSEMBLY WITH WELDING CLAMP



ITEM NUMBER	AWG	LENGTH	INSULATION	OD	LBS/1K'
WELD-2/0X3W	2/0	3'	.080"	.568"	443

WELDFLEX ASSEMBLY WITH WELDING STINGER



ITEM NUMBER	AWG	LENGTH	INSULATION	OD	LBS/1K'
WELD-2/0X10RH	2/0	10'	.080"	.568"	443

WELDFLEX ASSEMBLY WITH ROD HOLDER



ITEM NUMBER	AWG	LENGTH	INSULATION	OD	LBS/1K'
WELD-2/0X50L	2/0	50'	.080"	.568"	443
WELD-2/0X100L	2/0	100'	.080"	.568"	443


36" HIGH-LEVEL ALARM

This high-level alarm is specifically designed for liquid terminal operation on batch loading and overfill protection, unloading, tank cars, tank trucks, and marine barges, suitable for open and closed dome.

- ✓ TOTALLY SELF-CONTAINED; NO WIRES, TUBING, OR EXTERNAL POWER
- ✓ RUGGED WEATHER AND CORROSION-RESISTANT CONSTRUCTION
- ✓ NO MOVING PARTS, TIP SENSITIVE PHASE SHIFT™ DIGITAL CAPACITANCE SENSOR FOR CONDUCTIVE AND NON-CONDUCTIVE FLUID
- ✓ INTRINSICALLY SAFE DESIGN PER ANSI/UL913 FOR CLASS I, DIV I GROUPS A, B, C, AND D HAZARDOUS AREAS
- ✓ REQUIRES NO CALIBRATION OR ADJUSTMENT
- ✓ OPERATES UP TO 2500 HOURS ON A SINGLE 9V ALKALINE BATTERY
- ✓ ADJUSTABLE INSERTION LENGTH THROUGH A STANDARD ½" NPT FITTING
- ✓ HIGH-INTENSITY AUDIBLE AND FLASHING VISUAL OUTPUTS
- ✓ FULL, HARD GRADUATED LASER ENGRAVED ROD
- ✓ FAIL-SAFE CONTINUOUS BATTERY MONITOR GOES TO ALARM STATE ON LOW BATTERY
- ✓ FACTORY TUNED TO TRIP ¼" INTO LIQUID



LOCATIONS & CONTACT INFO

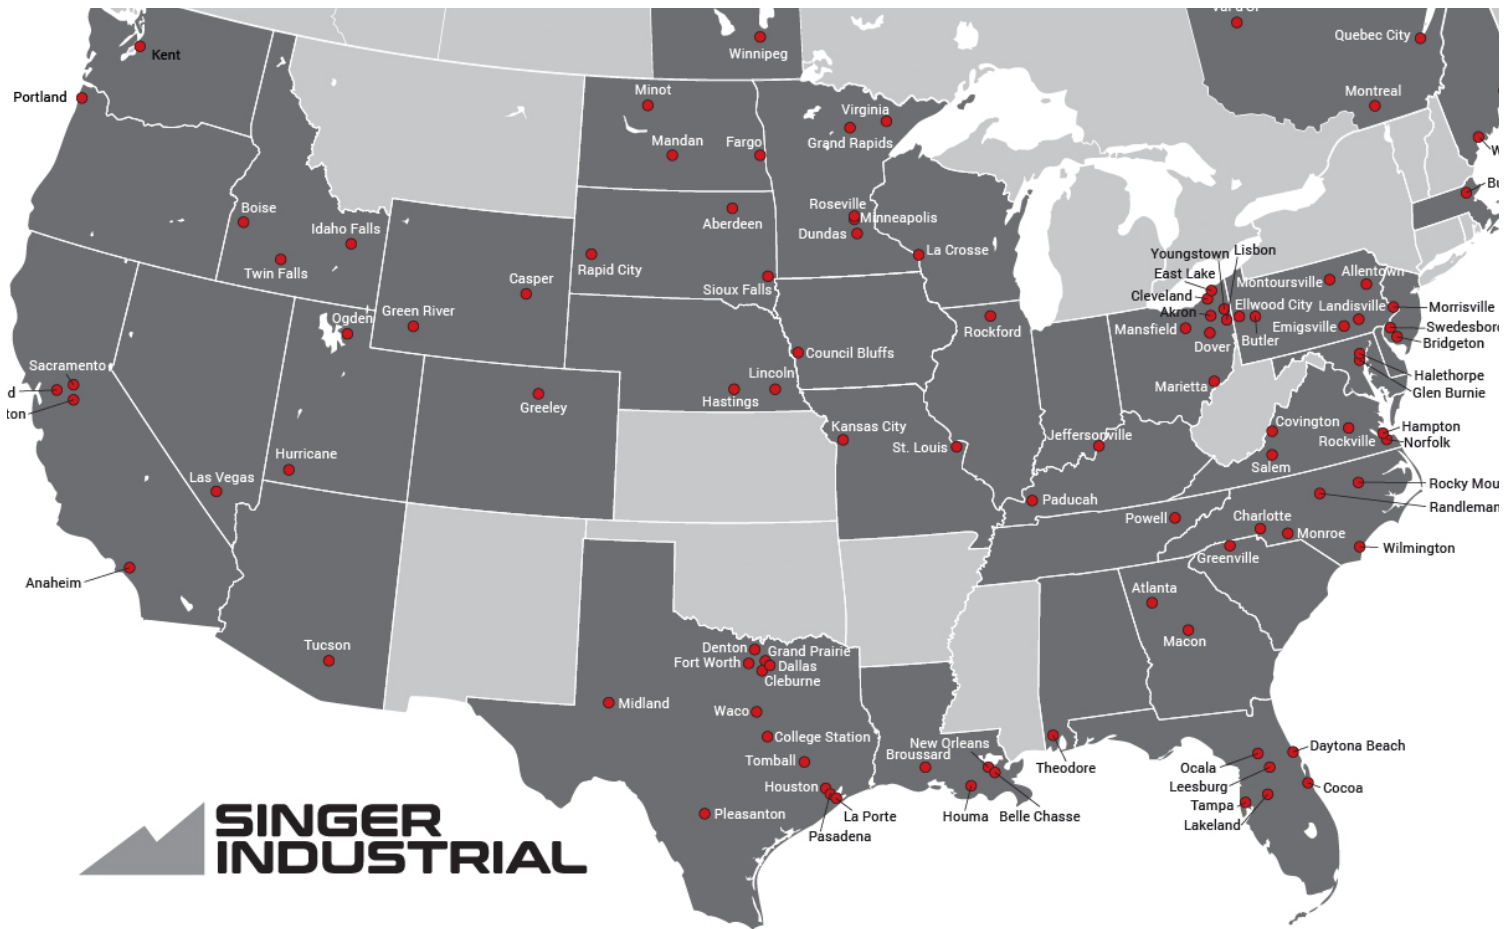

Industrial Hose, Cable, & Ducting Experts



A SINGER INDUSTRIAL COMPANY

www.capitalrubberco.com

SACRAMENTO, CA

P. 916-498-1800

A: 1725 19th Street
Sacramento, CA 95811

FAIRFIELD, CA

P. 707-615-6110

A: 5045 Fulton Drive, Ste D
Fairfield, CA 94534

SACRAMENTO, CA

P. 916-386-9433

A: 8640 Elder Creek Road
Sacramento, CA 95828

STOCKTON, CA

P. 209-464-1200

A: 1110 South Wilson Way
Stockton, CA 95205