



# Thermoplastic Industrial Hoses



MADE IN THE  
**USA**



**KURIYAMA**  
OF AMERICA, INC.



**TIGERFLEX™**  
ISO 9001  
QUALITY M.S.

**EDITION 0519**



# Index of Products by Series

2001™ Series Hose .....	10	SBDC™ TigerClamps™ .....	59
2020™ Series Hose .....	12	SBDCR™ TigerClamps™ .....	59
AL-MHA .....	59	SH™ Series Hose .....	45
AL-MHD .....	59	SLV-DRP™ Banding Sleeves .....	58
AL-MHM .....	59	SLV-VAP™ Banding Sleeves .....	58
AL-MHS .....	59	SLV-VLT™ Banding Sleeves .....	58
AMPH-BK™ Amphibian™ Series Hose .....	24	STIG™ Series Hose .....	25
BARK™ “Bark Hose” Series Hose .....	35	TAQ™ .....	16
BCCF™ Banding Coils .....	57	TBLU™ Tiger™ Blue Series Hose .....	52
BCRT™ Banding Coils .....	57	TG™ Tiger™ Green Series Hose .....	50
BCWF™ Banding Coils .....	57	TR1™ Tiger™ Series Hose .....	22
BW™ “Blue Water” Series Hose .....	42	THT™ Tiger™ Series Hose .....	23
CF™ Cold Flex™ Series Hose .....	43	TRED™ Tiger™ Red Series Hose .....	52
CG™/CG-SL™ “Cover Guard” Series Hose .....	39	TSD™ Tiger™ Series Hose .....	53
F™ Tiger™ Suction Series Hose .....	41	TY™ Tiger™ Yellow Series Hose .....	51
FMCRT™ “Spa Hose” Series Hose .....	49	UBK™ Series Hose .....	29
FT™ Series Hose .....	19	UF1™ Ureflex™ Series Hose .....	27
G™ Tiger™ Suction Series Hose .....	41	UF2™ Ureflex™ Series Hose .....	26
GC-C™ “Ground Cover” Series Hose .....	33	UFC™ Ureflex™ Series Hose .....	28
GT™ Series Hose .....	38	UV1™ Urevac™ Series Hose .....	37
GTF™ Series Hose .....	20	UVE™ Urevac™ Series Hose .....	37
GTFE™ Series Hose .....	20	UV2™ Urevac™ Series Hose .....	31
GTG™ Series Hose .....	38	UV3™ Urevac™ Series Hose .....	30
H™ Series Hose .....	40	UVF™ Series Hose .....	21
J™ Series Hose .....	40	UVFE™ Series Hose .....	21
K™ Series Hose .....	40	UVPE™ Series Hose .....	32
LK™ Lawn King™ Series Hose .....	36	VLT-SD™ Voltbuster™ Series Hose .....	13
LKC™ Lawn King™ Series Hose .....	36	VOLT™ Voltbuster™ Series Hose .....	11
MH™ “Marine Hose” Series Hose .....	48	W™ Series Hose .....	44
MILK™ Series Hose .....	18	WBS™ Series Hose .....	15
MILK-LT™ Series Hose .....	18	WE™ Series Hose .....	9
MULCH™ Series Hose .....	34	WG™ Series Hose .....	47
MULCH-LT™ Series Hose .....	34	WH™ Series Hose .....	45
ORV™ Series Hose .....	55	WOR™ Series Hose .....	54
OV™ Oil Vac™ Series Hose .....	56	WST™ Series Hose .....	46
PFT™ Plas-T-Flow™ Series Hose .....	14	WSTF™ Series Hose .....	17
S™ Tiger™ Suction Series Hose .....	41	WT™ Series Hose .....	8

**NEW**

## Index of Reference Pages

Accessories .....	59	Index of Products by Series .....	2
Application Guide .....	6-7	Index of Reference Pages .....	2
Care and Maintenance .....	65	PVC and Polyurethane Resistance Guide .....	69-72
Cautionary Statement and Limited Warranty .....	Back Cover	Quality Assurance .....	63
Chemical Resistance Guides and Warning .....	68-74	Recommended Practices .....	65
Compliance Footnotes for Tigerflex™ Catalog Products .....	63	SBR Chemical Resistance Guide .....	74
Effect of Temperature on Working Pressure & Vacuum Ratings .....	67	Storage and Handling .....	66
EPDM Chemical Resistance Guide .....	73	Table of Contents .....	3
Features and Advantages Catalog Icon Guide .....	4	Tigerflex™ Accessories Compatability Chart .....	60-62
Features and Advantages Guide by Hose Series .....	5	Tigerflex™ Products Custom Inquiry Form .....	75
Flexibility .....	64	Working Pressure Ratings .....	67

NOTE: Although every effort has been made to accurately show the color of the Tigerflex™ hoses in this catalog, because of the limitations of four-color process printing some of the colors shown herein may not be exact.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Table of Contents

Application Guide.....	6-7
Features and Advantages Catalog Icon Guide .....	4
Features and Advantages Guide by Hose Series .....	5
Index of Products by Series.....	2
Index of Reference Pages.....	2
Table of Contents.....	3

## Food Grade:

WT™ Series Hose .....	8
WE™ Series Hose .....	9
2001™ Series Hose .....	10
Voltbuster™ VOLT™ Series Hose.....	12
2020™ Series Hose .....	13
Voltbuster™ VLT-SD™ Series Hose .....	14
WBS™ Series Hose.....	15
TAQ™ Series Hose.....	16
WSTF™ Series Hose .....	17
MILK™ Series Hose .....	18
MILK-LT™ Series Hose .....	18
FT™ Series Hose .....	19
GTF™ Series Hose.....	20
GTFE™ Series Hose.....	20
UVF™ Series Hose.....	21
UVFE™ Series Hose.....	21
Plas-T-Flow™ PF™ Series Hose.....	14

## Material Handling:

Tiger™ TR1™ Series Hose .....	22
Tiger™ THT™ Series Hose .....	23
Amphibian™ AMPH-BK™ Series Hose .....	24
Ureflex™ UF2™ Series Hose .....	26
Ureflex™ UF1™ Series Hose.....	27
UBK™ Series Hose.....	29
Ureflex™ UFC™ Series Hose .....	28
Urevac™ UV3™ Series Hose.....	30
Urevac™ UV2™ Series Hose .....	31
UVPE™ Series Hose.....	32
“Ground Cover” GC-C™ Series Hose.....	33
MULCH™ Series Hose.....	34
MULCH-LT™ Series Hose .....	34
“Bark Hose” BARK™ Series Hose.....	35
STIG™ Series Hose.....	24

## Ducting:

Lawn King™ LK™ Series Hose .....	36
Lawn King™ LKC™ Series Hose.....	36
Urevac™ UV1™/UVE™ Series Hose .....	37
GT™ Series Hose.....	38
GTG™ Series Hose.....	38
“Cover Guard” CG™/CG-SL™ Series Hose.....	39

## Liquid Suction:

HT™ Series Hose .....	40
JT™ Series Hose .....	40
KT™ Series Hose .....	40
Tiger™ Suction FT™ Series Hose.....	41
Tiger™ Suction GT™ Series Hose.....	41
Tiger™ Suction ST™ Series Hose.....	41
“Blue Water” BW™ Series Hose .....	42
Coldflex™ CF™ Series Hose.....	43
WT™ Series Hose .....	44
WH™ Series Hose.....	45
SH™ Series Hose.....	45
WST™ Series Hose.....	46
WG™ Series Hose .....	47
“Marine Hose” MH™ Series Hose .....	48
“Spa Hose” FMCRT™ Series Hose .....	49
Tiger™ Green TG™ Series Hose .....	50
Tiger™ Yellow TY™ Series Hose .....	51
Tiger™ Red TRED™ Series Hose .....	52
Tiger™ Blue TBLU™ Series Hose .....	52
Tiger™ TSD™ Series Hose .....	53
WOR™ Series Hose.....	54
ORV™ Series Hose.....	55
Oil Vac™ OV™ Series Hose .....	56

## Accessories:

Banding Coils.....	57
Banding Sleeves .....	58
Full Flow Swivel Couplings.....	59
TigerClamps™ .....	59
Tigerflex™ Accessories Compatability Chart .....	60-62

## References:

Quality Assurance.....	63
Compliance Footnotes for Tigerflex™ Catalog Products ...	63
Flexibility .....	64
Care and Maintenance .....	65
Recommended Practices .....	65
Storage and Handling .....	66
Effect of Temperature on Working Pressure & Vacuum Ratings...	67
Working Pressure Ratings.....	67
Chemical Resistance Guides and Warning.....	68
PVC and Polyurethane Resistance Guide.....	69-72
EPDM Chemical Resistance Guide .....	73
SBR Chemical Resistance Guide .....	74
Tigerflex™ Products Custom Inquiry Form .....	75
Cautionary Statement and Limited Warranty .....	Back Cover

The trademarks contained in this publication are trademarks of Kuriyama of America, Inc.  
The “Tigerflex” design trademarks contained in this publication are trademarks of Tigers Polymer Corporation.

NOTE: Although every effort has been made to accurately show the color of the Tigerflex™ hoses in this catalog, because of the limitations of four-color process printing some of the colors shown herein may not be exact.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Features & Advantages Catalog Icon Guide



**Abrasion Resistant** – Indicates hoses designed to help resist internal wear caused by the transfer of abrasive materials.



**Abrasion Resistant Plus** – Indicates hoses designed to help resist internal wear caused by the transfer of highly abrasive materials.



**“Cold-Flex” Materials** – Indicates hoses formulated to remain flexible in sub-zero temperatures.



**Easy Slide** – Indicates hoses with an external rigid helix designed to slide easily over rough surfaces. Easy-to-handle.



**Food Grade** – Indicates hoses which comply with applicable FDA requirements for food contact. Several of these hoses also meet USDA and 3-A requirements.



**Oil Resistant** – Indicates hoses which exhibit resistance to animal and petroleum based oils.



**Static Dissipative** – Indicates hoses formulated with static dissipative compounds or hoses containing a grounding wire to help prevent the build-up of static electricity.



**Transparent Construction** – Indicates hoses with a transparent or semi-transparent tube. These hoses allow the user visual confirmation of material flow, and the ability to see if material or condensation has collected in the hose tube.



**Water** – Indicates hoses which can be used for freshwater and saltwater transfer.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# Features & Advantages Guide By Hose Series



ABRASION  
RESISTANT



ABRASION  
RESISTANT PLUS



"COLD-FLEX"  
MATERIALS



EASY SLIDE



FOOD  
GRADE



OIL  
RESISTANT



STATIC  
DISSIPATIVE



TRANSPARENT  
CONSTRUCTION



WATER

Food Grade:									
2001		X			X	X	X	X	
2020		X	X	X	X	X	X	X	
FT					X			X	X
GTF				X	X			X	X
GTFE				X	X		X	X	X
MILK					X			X	X
MILK-LT			X		X			X	X
PF		X	X	X		X	X	X	
TAQ				X	X				X
UVF	X		X	X	X	X		X	
UVFE	X		X	X	X	X	X	X	
VOLT/VLT-SD		X	X	X	X	X	X	X	
WBS	X				X		X	X	X
WE	X				X		X	X	X
WSTF				X	X			X	X
WT	X				X			X	X
Material Handling:									
AMPH-BK		X	X			X	X		X
BARK	X			X				X	X
GC-C	X		X			X		X	
MULCH	X							X	X
MULCH-LT	X		X					X	X
STIG		X	X			X	X		
TR1		X	X				X		X
THT	X		X	X			X		X
UBK		X	X	X		X	X		
UF1		X	X			X	X		
UF2		X	X			X	X		
UFC		X	X			X	X	X	
UV-2	X		X	X		X	X	X	
UV-3		X	X	X		X	X	X	
UVPE	X		X			X	X	X	
Ducting:									
CG/CG-SL				X				X	X
GT				X				X	X
GTG				X					X
LK	X		X	X					X
LKC	X		X	X				X	X
UV1/UVPE	X		X	X		X	X	X	
Liquid Suction:									
BW			X					X	X
CF	X		X				X		X
F/G/S								X	X
H/J/K								X	X
MH									X
ORV						X			X
OV		X	X			X		X	
SPA									X
TG/TY/TRED/TBLU			X	X					X
TSD			X	X					X
W			X					X	X
WG									X
WH/SH			X					X	X
WOR						X			X
WST								X	X

**NOTE:** For details regarding the features & advantages listed, refer to the catalog page for each product.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Application Guide

✦ = Primary Applications  
✓ = Secondary Applications

## Food Grade

## Material Handling

	2001	2020	FT	GTF/ GT FE	MILK/ MILK- LT	PF	TAQ	UVF/ UVFE	VLT- SD	VOLT	WBS	WE	WSTF	WT	AMPH- BK	BARK	GC- C	MULCH/ MULCH- LT	STIG	TR1	THT	UBK	UF1	UF2
Agricultural dry fertilizers															✦							✦	✦	
Agricultural liquid fertilizers																					✦			
Agri-foam systems																								
Air seeder lines															✦							✦	✦	
Bulk truck and railcar unloading	✓	✦				✦			✦	✦		✓		✓					✓	✓			✓	✓
Cable and hose bundle protection																								
Concrete resurfacing dust collection																					✓			
Drain lines														✓										
Ducting, ventilation & fume removal				✦				✦													✓			
Dust collection				✓				✦													✓			
Fish suction												✓												
Fly ash collection										✦					✦				✦	✦	✦	✦	✦	✦
Food grade blower and ducting systems				✦		✦	✦	✦																
Food grade liquids - water, beer, wine and juice			✦		✦		✦						✦	✦										
Food grade material handling - heavy duty abrasive	✦	✦							✦	✦	✓	✓	✦	✓										
Food grade material handling - standard duty	✓	✓	✓	✓				✓	✓	✓	✦	✦	✦	✦				✓						
Gold dredging																								
Hydro excavation															✦					✦	✦			
Ice transfer			✦	✓	✦		✦						✦	✓										
Industrial vacuum equipment	✓	✓							✦	✦	✓	✓	✦	✓	✦				✦	✦	✦	✦	✦	✦
Insulation blowing																								
Irrigation lines																								
Lawn and leaf collection																✦	✓	✓						
Liquid manure handling																								
Marine bilge discharge																								
Marine plumbing																								
Material chutes	✓	✓		✓		✓		✓	✦	✦	✓	✓		✓	✓				✦	✓	✦	✓	✦	✦
Material handling - heavy duty abrasive	✦	✦				✦			✦	✦	✓	✓	✦	✓	✦		✦	✦	✦	✦	✦	✦	✦	✦
Material handling - standard duty	✓	✓	✓	✓				✓	✓	✓	✦	✦	✦	✦	✓		✦	✦	✓	✦	✦	✓	✓	✓
Material handling - light duty				✦				✓			✓	✓		✓						✓				
Milk and dairy product transfer			✦		✦																			
Milling machine scrap recovery						✦			✦	✦					✦				✦	✦	✦	✦	✦	✦
Mining applications (MSHA)																								
Mulch, bark, wood chips, other surfacing materials																✦	✦	✦						
Oil skimming															✓									
Oil slurries																								
Oil suction		✓				✓			✓	✓	✦	✦	✓	✦	✓				✓			✓	✓	✓
Pharmaceutical product transfer	✦			✦				✦		✦	✦	✦	✓	✦										
Plastic processing equipment	✦	✓	✓	✓		✦		✓	✦	✦	✦	✦		✦								✓	✓	
Pneumatic conveying systems	✦		✓		✓				✦	✦	✦	✦		✦										
Poultry processing			✦		✓									✦										
Pumps, rental and construction dewatering																					✓			
Pumps, trash																								
Recreational vehicle (RV) plumbing																								
Rock dusting																					✓			
Rock, gravel, sand and crushed concrete vacuuming						✓									✦				✦	✦	✦	✦	✦	✦
Septic and wastewater handling																					✓			
Sewer truck boom hose															✦				✓	✦	✦	✓	✓	✓
Shot blast recovery															✦				✦	✦	✦	✦	✦	✦
Slurry handling															✦					✦	✦			
Soil, seed and compost delivery																✦	✦	✦						
Spa, pool and hot tub plumbing																								
Suction and discharge		✦					✦		✦				✦											
Wand hose																✓				✦		✓		
Water suction - heavy duty			✦			✦					✓		✦	✓	✓				✓	✓				✓
Water suction - standard duty			✓		✦	✓					✓		✓	✓										

**CAUTION NOTE:** This application guide provides information on typical hose applications. Actual results may vary due to variances in the operating conditions involving temperature, chemical resistance, working pressure, etc. Please refer to the specifications printed for each product in this catalog, along with information regarding chemical resistance and our Cautionary Statement, to better insure successful results.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# Application Guide

✚ = Primary Applications  
✓ = Secondary Applications

	Material Handling				Ducting					Liquid Suction													
	UFC	UV2	UV3	UVPE	CG/ CG-SL	GT/ GTG	LK/ LKC	UV1/ UVE	UVFE	BW	CF	F/G/S	H/J/K	MH	OV	SPA	TG/TY/ TRED/ TBLU	TSD	W	WG	WH/ SH	WOR/ ORV	WST
Agricultural dry fertilizers	✚	✚									✓	✓	✓				✚	✚	✓	✓			
Agricultural liquid fertilizers										✓	✓	✓	✚				✚	✚	✓	✓			
Agri-foam systems											✓	✓	✓				✓	✚					
Air seeder lines	✚	✚									✓	✓	✚										
Bulk truck and railcar unloading																							
Cable and hose bundle protection					✚	✓	✓														✓		
Concrete resurfacing dust collection		✓						✚											✓	✓	✚		
Drain lines					✓	✚				✓		✓	✚	✚		✚			✓	✓	✚		
Ducting, ventilation & fume removal					✓	✚	✓	✚	✚														
Dust collection		✚	✚		✓	✚	✚	✚	✚												✚		
Fish suction										✓									✚	✚			✚
Fly ash collection																							
Food grade blower and ducting systems									✚														
Food grade liquids - water, beer, wine and juice																							
Food grade material handling - heavy duty abrasive																							
Food grade material handling - standard duty									✓														
Gold dredging										✓									✚	✚	✚		✓
Hydro excavation																							
Ice transfer	✚		✓	✓						✓	✓								✓				
Industrial vacuum equipment		✓	✓			✓		✚											✓	✓	✓		
Insulation blowing																							
Irrigation lines							✚	✓		✓	✚	✚	✚				✚	✓	✓	✓			✚
Lawn and leaf collection							✓	✚	✓								✚	✚			✓		
Liquid manure handling											✓						✚	✚					
Marine bilge discharge										✓	✓		✓	✚			✚	✓			✓		
Marine plumbing														✚									
Material chutes	✚	✚	✓	✓		✓	✓	✚	✓						✚								
Material handling - heavy duty abrasive	✚	✓	✚	✚			✓	✓	✚		✚				✚				✓	✓			
Material handling - standard duty	✓	✚	✓	✚			✚	✚	✓						✓						✓		
Material handling - light duty							✚	✚	✓												✓		
Milk and dairy product transfer																							
Milling machine scrap recovery	✚		✚	✓											✓								
Mining applications (MSHA)					✚								✚										
Mulch, bark, wood chips, other surfacing materials						✓	✓																
Oil skimming															✓							✚	
Oil slurries															✓							✚	
Oil suction	✓	✓	✓	✓											✚							✚	
Pharmaceutical product transfer									✚														
Plastic processing equipment	✚		✚	✚					✓														
Pneumatic conveying systems																							
Poultry processing																							
Pumps, rental and construction dewatering										✚	✚	✚	✚				✚	✚	✚	✚			✚
Pumps, trash										✚	✚	✚	✚				✚	✚	✚	✚			✚
Recreational vehicle (RV) plumbing												✓	✚	✚							✓		
Rock dusting																				✚			
Rock, gravel, sand and crushed concrete vacuuming			✓	✓													✚	✚					
Septic and wastewater handling										✓	✓												
Sewer truck boom hose																							
Shot blast recovery	✚		✓																				
Slurry handling										✓	✚	✓							✓	✚		✓	
Soil, seed and compost delivery							✓																
Spa, pool and hot tub plumbing																✚							
Suction and discharge																		✚					✚
Wand hose		✚					✓	✓															
Water suction - heavy duty										✓	✚	✚	✓	✓	✓	✓		✚	✚	✚	✚		✚
Water suction - standard duty										✚	✓	✓	✚	✓	✓	✓	✚	✓	✓	✓	✚	✓	✓

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

**NEW  
LENGTHS  
& SIZES**

## WT™ Series

### Food Grade PVC

### Material Handling Hose

#### General Applications:

- Food grade liquids such as potable water, beer, wine and juice
- Food grade material handling – standard duty
- Material handling – standard duty
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment
- Poultry processing

**Construction:** PVC tube with rigid PVC helix.

#### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*


#### Features and Advantages:

- **Superior Product Design** – Tigerflex™ WT™ series hoses are an industry standard for pneumatic material handling due to our specially engineered compound, innovative design and uncompromising quality control. Provides the ideal combination of light weight, flexibility and durability.



**MADE IN THE  
USA**

**Phthalate  
FREE**



- **Food Grade Materials** – Hose complies with applicable FDA<sup>(03)</sup>, 3-A<sup>(01)</sup> and USDA<sup>(12)</sup> requirements.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
WT100	1	25.4	1.30	33.0	55	30	28	28	2	100/50	0.21
WT125	1-1/4	31.7	1.60	40.6	50	25	28	28	2	100/50	0.28
WT150	1-1/2	38.1	1.92	48.8	50	25	28	28	3	100/50	0.35
WT200	2	50.8	2.40	61.0	40	20	28	24	4	100/50	0.56
WT225	2-1/4	57.2	2.74	69.6	40	20	28	24	4.5	100/50	0.65
WT250	2-1/2	63.5	2.99	75.9	40	20	28	24	5	100/50	0.77
WT300	3	76.2	3.64	92.5	40	20	28	24	6	100/50	1.10
WT350	3-1/2	88.9	4.21	107.0	35	18	28	24	8	100/50	1.48
WT400	4	101.6	4.72	120.0	35	18	24	22	10	100/50	1.80
WT500	5	127.0	5.74	145.8	30	15	24	22	16	100/50/20	2.34
WT600	6	152.4	6.91	175.5	30	15	24	22	18	100/50/20	3.70
WT800	8	203.2	8.97	227.8	20	10	20	18	36	50/20	5.53
WT45M	1.77	45.0	2.09	53.0	45	25	28	24	4	100/50	0.44
WT57M	2.24	57.0	2.68	68.0	40	20	28	24	4.5	100/50	0.64
WT60M	2.36	60.0	2.8	71.1	40	20	28	24	4.5	100/50	0.71

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**3A<sup>(01)</sup>, BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, PHTHALATE FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>, USDA<sup>(12)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.





## WE™ Series

### Food Grade PVC

### Material Handling Hose

### With Grounding Wire

#### General Applications:

- Food grade material handling – standard duty
- Material handling – standard duty
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment

**Construction:** PVC tube with rigid PVC helix and grounding wire.

**Service Temperature Range:**  
-4°F (-20°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Superior Product Design** – Tigerflex™ WE™ series hoses are an industry standard for pneumatic material handling, due to our specially engineered compound, innovative design and uncompromising quality control. Provides the ideal combination of light weight, flexibility and durability.
- **Food Grade Materials** – Hose complies with applicable FDA<sup>(03)</sup>, 3-A<sup>(01)</sup> and USDA<sup>(12)</sup> requirements.
- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
WE100	1	25.4	1.30	33.0	55	30	28	28	2	100/50	0.21
WE125	1-1/4	32.0	1.65	42.0	50	25	28	28	2	100/60/50	0.33
WE150	1-1/2	38.1	1.93	49.0	50	25	28	28	3	100/60/50	0.43
WE200	2	50.8	2.48	63.0	40	20	28	24	4	100/60/50	0.58
WE225	2-1/4	57.2	2.80	71.0	40	20	28	24	4.5	100/60/50	0.65
WE250	2-1/2	63.5	3.07	76.5	40	20	28	24	5	100/60/50	0.89
WE300	3	76.2	3.64	91.5	40	20	28	24	6	100/60/50	1.25
WE350	3-1/2	88.9	4.27	108.5	35	18	28	24	8	100/60/50	1.55
WE400	4	101.6	4.72	120.0	35	18	24	20	10	100/60/50	1.93
WE500	5	127.0	5.74	146.0	30	15	24	20	16	60/50/20	2.40
WE600	6	152.4	6.81	175.5	30	15	24	20	18	60/50/20	3.70
WE800	8	204.8	9.06	230.0	20	10	20	18	36	20	5.62
WE45M	1.77	45.0	2.20	55.8	45	25	28	24	4	60	0.46
WE57M	2.24	57.0	2.76	70.0	40	20	28	24	4.5	60	0.64
WE60M	2.36	60.0	2.80	71.1	40	20	28	24	4.5	100/50	0.71

**NOTE:** Service life and temperature range may vary depending on operating conditions and material type being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**CAUTION:** Grounding wire is designed to help dissipate static charge when extracted and connected to ground. Hose is not to be used in combustible situations unless it has been determined by the end user the application is not sufficient to result in propagating brush discharge.

**BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, PHTHALATE FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>, USDA<sup>(12)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# 2001™ Series

## Heavy Duty Food Grade Polyurethane Lined Material Handling Hose With Grounding Wire

### General Applications:


- Food grade material handling – heavy duty abrasive
- Material handling – heavy duty abrasive
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment

**Construction:** PVC cover with polyurethane liner, rigid PVC helix and grounding wire.

**Service Temperature Range:**  
-4°F (-20°C) to +150°F (+65°C)\*

### Features and Advantages:

- **Extra Thick Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Food Grade Materials** – Hose Cover complies with applicable FDA<sup>(03)</sup> requirements. Hose Liner (Product Contact Surface) complies with applicable FDA<sup>(04)</sup> requirements and USDA<sup>(12)</sup> requirements.

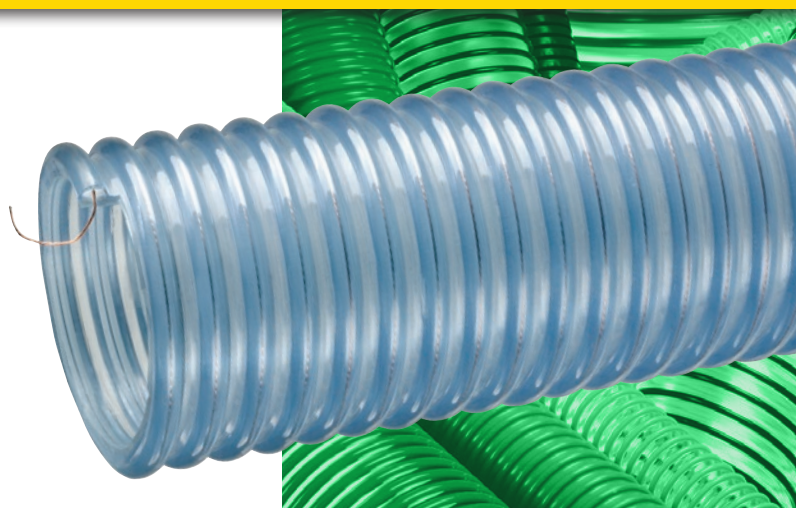

**MADE IN THE USA**

**Phthalate FREE**

- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
2001-150	1-1/2	38.1	1.88	47.8	50	25	Full	28	6	60	0.48
2001-200	2	50.8	2.44	62.0	40	20	Full	28	7	60	0.67
2001-250	2-1/2	63.5	3.12	77.2	40	20	Full	28	8	60	0.92
2001-300	3	76.2	3.70	94.1	40	20	Full	28	9	60	1.35
2001-400	4	101.6	4.80	122.0	35	18	Full	28	15	60/20	2.17
2001-500	5	127.0	5.81	147.6	35	18	28	25	23	60/20	2.77
2001-600	6	152.4	6.93	176.0	30	15	28	25	26	60/20	3.90
2001-700	7	178.8	8.08	205.2	30	15	28	25	30	60/20	5.20
2001-800	8	203.2	9.28	235.8	30	15	28	25	36	20	6.65

**NOTE:** Service life and temperature range may vary depending on operating conditions and material type being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**CAUTION:** Grounding wire is designed to help dissipate static charge when extracted and connected to ground. Hose is not to be used in combustible situations unless it has been determined by the end user the application if not sufficient to result in propagating brush discharge.

**BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, FDA<sup>(04)</sup>, PHTHALATE FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>, USDA<sup>(12)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.





NEW  
LENGTH  
& SIZE

## VOLT™ Series

### Heavy Duty Food Grade Static Dissipative Polyurethane Material Handling Hose

#### General Applications:

- Bulk truck and railcar unloading
- Fly ash collection
- Food grade material handling – heavy duty abrasive
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment

**Construction:** Static dissipative polyurethane tube, rigid helix and grounding wire (patent pending).

#### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Superior Static Protection!** – A properly grounded Voltbuster™ hose will not retain an electrostatic charge sufficient to create a propagating brush discharge. Hose material, using the embedded grounding wire, shows a charge decay time constant of < 1 second, based on independent lab testing.
- **Food Grade Materials** – Hose tube complies with FDA<sup>(05)</sup> requirements. Grounding wire embedded in external helix to prevent material contamination.
- **Extra Thick Abrasion Resistant Single-Ply Polyurethane Tube** – Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Transparent Construction** – “See-the-flow”. Allows for visual confirmation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Rigid helix design protects hose tube from wear; allows hose to slide easily over rough surfaces. Easy to handle.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
VOLT150	1-1/2	38.1	1.87	47.5	40	20	Full	28	2	100/60	0.31
VOLT200	2	51.1	2.52	63.9	40	20	Full	28	6	100/60	0.61
VOLT250	2-1/2	63.5	2.96	75.2	40	20	Full	28	7	100	0.76
VOLT300	3	76.2	3.60	91.4	40	20	Full	28	9	100/60/20	0.91
VOLT400	4	101.6	4.69	121.0	35	17	28	25	12	100/60/20	1.70
VOLT500	5	127.0	5.75	146.8	35	17	28	25	14	60/20	2.13
VOLT600	6	153.4	6.81	173.2	30	15	25	20	16	60/20	2.53
VOLT800	8	203.5	8.76	223.3	30	15	25	20	18	20	3.30
VOLT1000	10	255.5	11.04	280.5	25	10	22	16	25	20	4.99

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

⚡ **CAUTION:** This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

**BSE/TSE<sup>(02)</sup>, FDA<sup>(05)</sup>, PHthalate Free<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

## 2020™ Series

### Heavy Duty Food Grade Polyurethane Fabric Reinforced Material Handling Hose With Grounding Wire

#### General Applications:

- Bulk truck and railcar unloading
- Food grade material handling – heavy duty abrasive
- Material handling – heavy duty abrasive
- Suction and discharge

**Construction:** Extra thick double-ply polyurethane tube, polyester fabric reinforcement, rigid PVC helix and grounding wire.

#### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Extra Thick Abrasion Resistant Double-Ply Polyurethane Tube** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Food Grade Materials** – Hose Liner (Product Contact Surface) complies with applicable FDA<sup>(04)</sup> and USDA<sup>(12)</sup> requirements.
- **Fabric Reinforcement** – Designed with high tensile strength, food grade<sup>(05)</sup>, polyester yarn jacket to handle both suction, and higher pressure discharge applications.



MADE IN THE  
**USA**

**Phthalate  
FREE**



- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Oil Resistant Polyurethane Tube** – Resists most animal and petroleum based oils.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
2020-200	2	50.1	2.65	67.5	75	40	Full	28	9	100	0.94
2020-300	3	76.2	3.78	96.0	70	35	Full	28	10	100/50/20	1.20
2020-400	4	101.6	4.84	123.0	65	30	Full	28	12	100/50/20	1.60
2020-500	5	127.0	5.79	147.0	45	22	28	25	14	50/25/20	2.45
2020-600	6	152.4	6.93	176.0	40	22	28	25	16	50/25/20	2.86
2020-800	8	206.0	9.21	234.0	30	15	24	20	22	20	4.69

**NOTE:** Service life and temperature range may vary depending on operating conditions and material type being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

⚡ **CAUTION:** Grounding wire is designed to help dissipate static charge when extracted and connected to ground. Hose is not to be used in combustible situations unless it has been determined by the end user the application is not sufficient to result in propagating brush discharge.

**BSE/TSE<sup>(02)</sup>, FDA<sup>(04)</sup>, FDA<sup>(05)</sup>, PHthalate Free<sup>(10)</sup>, RoHS<sup>(11)</sup>, USDA<sup>(12)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.





## VLT-SD™ Series

### Heavy Duty Food Grade Static Dissipative Polyurethane Fabric Reinforced Material Handling Hose

#### General Applications:

- Bulk truck and railcar unloading
- Food grade material handling – heavy duty abrasive
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Plastic processing equipment
- Pneumatic conveying equipment
- Suction and discharge

**Construction:** Static dissipative polyurethane tube, polyester fabric reinforcement, rigid helix and grounding wire (patent pending).

#### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Superior Static Protection!** – A properly grounded Voltbuster™ hose will not retain an electrostatic charge sufficient to create a propagating brush discharge. Hose material, using the embedded grounding wire, shows a charge decay time constant of < 1 second, based on independent lab testing.
- **Food Grade Materials** – Hose tube complies with FDA<sup>(05)</sup> requirements. Grounding wire embedded in external helix to prevent material contamination.
- **Extra Thick Abrasion Resistant Double-Ply Polyurethane Tube** – Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Fabric Reinforcement** – Designed with high tensile strength, food grade FDA<sup>(06)</sup>, polyester yarn jacket to handle both suction, and higher pressure discharge applications.
- **Transparent Construction** – “See-the-flow”. Allows for visual conformation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Rigid helix design protects hose from wear; allows hose to slide easily over rough surfaces. Easy to handle.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
VLT-SD200	2	51.1	2.67	67.0	75	40	Full	28	9	100/50	0.77
VLT-SD300	3	77.0	3.78	96.0	70	35	Full	28	12	100/20	1.22
VLT-SD400	4	102.2	4.84	123.0	65	30	Full	28	13	100/60/20	1.85
VLT-SD500	5	128.0	5.79	152.0	45	22	28	25	14	60/20	2.43
VLT-SD600	6	153.4	6.93	177.4	40	22	28	25	17	60/20	3.05
VLT-SD800	8	206.0	9.25	235.0	35	25	26	20	23	20	4.70

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

⚡ **CAUTION:** This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

**BSE/TSE<sup>(02)</sup>, FDA<sup>(05)</sup>, FDA<sup>(06)</sup>, PHthalate Free<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Plas-T-Flo™ PF™ Series Heavy Duty Food Grade Polyurethane Material Handling Hose With Grounding Wire

## General Applications:

- Bulk truck & railcar unloading
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Plastic processing equipment

**Construction:** Polyurethane tube with rigid PVC helix and grounding wire.

## Service Temperature:

-40°F (-40°C) to +150°F (+65°C)\*

## Features and Advantages:

- **Extra Thick Single-Ply Abrasion Resistant Polyurethane Tube** – Our thickest single-ply polyurethane tube! Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.



- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Oil Resistant Polyurethane Tube** – Resists most animal and petroleum based oils.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
PF300	3	76.2	3.39	86.0	35	15	28	25	10	100/20	1.50
PF400	4	101.6	4.84	123.0	30	15	28	25	12	100/50/20	1.96
PF500	5	127.0	5.87	149.0	30	15	25	22	13	100/50/20	2.50
PF600	6	152.4	6.91	175.5	30	15	25	22	16	100/50/20	3.18


**NOTE:** Service life and temperature range may vary depending on operating conditions and material type being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

⚠ **CAUTION:** Grounding wire is designed to help dissipate static charge when extracted and connected to ground. Hose is not to be used in combustible situations unless it has been determined by the end user the application is not sufficient to result in propagating brush discharge.

**BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, FDA<sup>(04)</sup>, PHTHALATE FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>, USDA<sup>(12)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

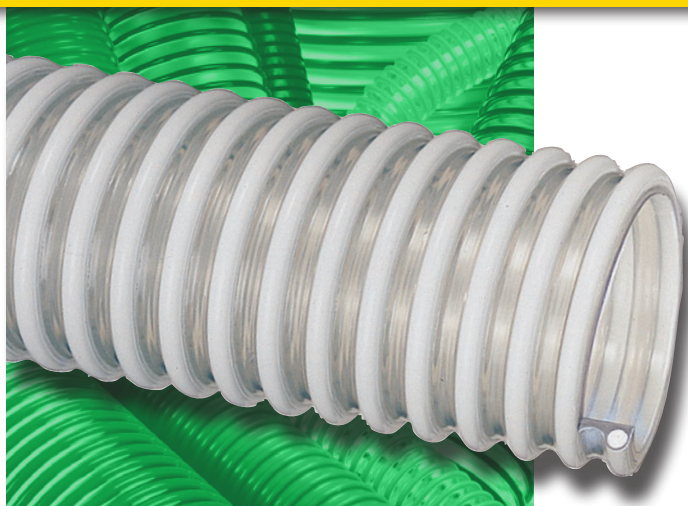

## WBS™ Series

### Food Grade PVC Material Handling Hose With Static Dissipative Additives

#### General Applications:

- Food grade material handling – standard duty
- Material handling – standard duty
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment

**Construction:** Static dissipative PVC tube with rigid PVC helix.

#### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*



#### Features and Advantages:

- **Abrasion Resistant PVC Tube** – Formulated from highly durable PVC compounds for increased abrasion resistance.
- **Food Grade Materials** – Hose complies with applicable FDA<sup>(03)</sup> requirements. Hose complies with applicable USDA<sup>(12)</sup> requirements.
- **Static Dissipative Tube** – Specially formulated to help prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
WBS150	1-1/2	38.1	1.92	48.8	50	25	28	28	3	100	0.35
WBS200	2	50.8	2.40	61.0	40	20	28	24	4	100	0.56
WBS250	2-1/2	63.5	2.99	75.9	40	20	28	24	5	100	0.77
WBS300	3	76.2	3.64	92.5	40	20	28	24	6	100	1.10
WBS400	4	101.6	4.76	121.0	35	20	24	20	10	100/50	1.92

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** The effectiveness of static dissipation is application-dependent, based upon humidity, material conveyed, and length of hose.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**CAUTION:** Hose is not to be used in combustible situations unless it has been determined by the end user the application if not sufficient to result in propagating brush discharge.

**BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, PHTHALATE FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>, USDA<sup>(12)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# Tiger™ Aqua TAQ™ Series

## Potable Water Suction and Discharge Hose



### General Applications:

- Transfer of potable water in residential, oilfield, airport and marine (ship) applications
- Ice transfer
- Food grade liquids such as beer, wine, and juice

**Construction:** Double-ply PVC tube, polyester fabric reinforcement and rigid PVC helix

### Service Temperature:

-40°F (-40°C) to +150°F (+65°C)\*

### Features and Advantages:

- **NSF Listed Liner** – Hose liner material certified under NSF/ANSI/CAN 61 for use in potable water applications. Please refer to NOTE below for official NSF listing. The hose itself is not certified with NSF.
- **Food Grade Materials** - Hose complies with applicable FDA<sup>(03)</sup> requirements.
- **“Cold Flex” Materials** – Hose remains flexible in sub-zero temperatures.



- **Opaque Construction** – Solid white cover reduces appearance of staining from conveyed materials, blocks out UV, reducing instances of algae growth.
- **Fabric Reinforcement** – Designed with a high tensile strength, food grade<sup>(05)</sup>, polyester yarn jacket to handle suction and pressure applications.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Phthalate Free**

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TAQ150	1-1/2	38.1	1.95	49.5	110	70	FULL	28	2.5	100	0.42
TAQ200	2	50.8	2.60	66.0	100	65	FULL	28	4	100	0.74
TAQ300	3	76.2	3.62	92.0	100	50	FULL	28	6	100	1.13
TAQ400	4	101.6	4.76	121.0	75	37	FULL	28	8	100	1.74
TAQ600	6	152.4	7.17	182.1	70	35	28	25	13	100/20	3.88
TAQ800	8	203.2	9.21	234.0	60	30	26	20	18	20	5.57

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** NSF Liner Material Listing: <http://info.nsf.org/Certified/PwsComponents/Listings.asp?Company=C0208288&Standard=061>

**NOTE:** For details of the following compliances and material certifications, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, FDA<sup>(05)</sup>, PHTHALATE FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



EASY SLIDE

FOOD  
GRADETRANSPARENT  
CONSTRUCTION

WATER



## WSTF™ Series

### Food Grade PVC Fabric Reinforced Suction & Discharge Hose

#### General Applications:

- Food grade liquids such as wine, beer and juice
- Food grade material handling – standard duty
- Ice transfer
- Suction and discharge
- Water suction – heavy duty

**Construction:** Double-ply PVC tube, polyester fabric reinforcement and rigid PVC helix.

#### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Food Grade Materials** – Hose complies with applicable FDA<sup>(03)</sup> and 3-A<sup>(01)</sup> requirements. Hose complies with applicable USDA<sup>(12)</sup> requirements.
- **Fabric Reinforcement** – Designed with high tensile strength, food grade, FDA<sup>(06)</sup> polyester yarn jacket to handle both suction, and higher pressure discharge applications.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Phthalate Free**

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
WSTF150	1-1/2	38.1	1.95	49.5	110	70	Full	28	2.5	100	0.42
WSTF200	2	50.8	2.60	66.0	100	65	Full	28	4	100	0.74
WSTF300	3	76.2	3.62	92.0	100	50	Full	28	6	100/20	1.13
WSTF400	4	101.6	4.76	121.0	75	37	Full	28	8	100/20	1.74
WSTF600	6	152.4	7.17	182.1	70	35	28	25	13	100/20	3.88

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**3A<sup>(01)</sup>, BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, FDA<sup>(06)</sup>, PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>, USDA<sup>(12)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

## MILK™ Series

Food Grade  
PVC Liquid Suction Hose

## MILK-LT™ Series

Low Temperature  
Food Grade  
PVC Liquid Suction Hose

MILK

MILK-LT  
(low temp)

### General Applications:

- Food grade liquids such as milk, beer, wine and juice
- Ice transfer
- Milk and dairy product transfer
- Water suction – standard duty

**Construction:** PVC tube with rigid PVC helix.

### Service Temperature Range (MILK):

-4°F (-20°C) to +150°F (+65°C)\*

### Service Temperature Range (MILK-LT):

-40°F (-40°C) to +150°F (+65°C)\*



### Features and Advantages:

- **Precision Controlled ID and OD Dimensions** – Facilitates insertion of sanitary fittings.
- **Food Grade Materials** – Hose complies with applicable FDA<sup>(03)</sup> and 3-A<sup>(01)</sup> requirements. Hose complies with applicable USDA<sup>(12)</sup> requirements.
- **"Cold-Flex" Materials (MILK-LT only)** – Hose remains flexible in severe sub-zero temperatures.
- **Transparent Construction** – "See-the-flow." Allows for visual confirmation of material flow.
- **Smooth Outer Cover** – Provides increased pressure rating and smooth surface for banding.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
MILK150	1-1/2	38.1	1.79	45.5	75	50	Full	26	4	100	0.45
MILK200	2	50.8	2.33	59.2	75	50	28	25	6	100	0.63
MILK250	2-1/2	63.5	2.87	73.0	55	40	28	24	10	100	0.81
MILK300	3	76.2	3.42	86.9	55	40	28	24	11	100	1.18
MILK-LT150	1-1/2	38.1	1.79	45.5	75	50	Full	26	4	100	0.45
MILK-LT200	2	50.8	2.33	59.2	75	50	28	25	5	100	0.65
MILK-LT250	2-1/2	63.5	2.87	73.0	55	40	28	24	8	100	0.84
MILK-LT300	3	76.2	3.42	86.9	55	40	28	24	11	100	1.20

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.


**3A<sup>(01)</sup>, BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, PHTHALATE FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>, USDA<sup>(12)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



FOOD  
GRADETRANSPARENT  
CONSTRUCTION

WATER

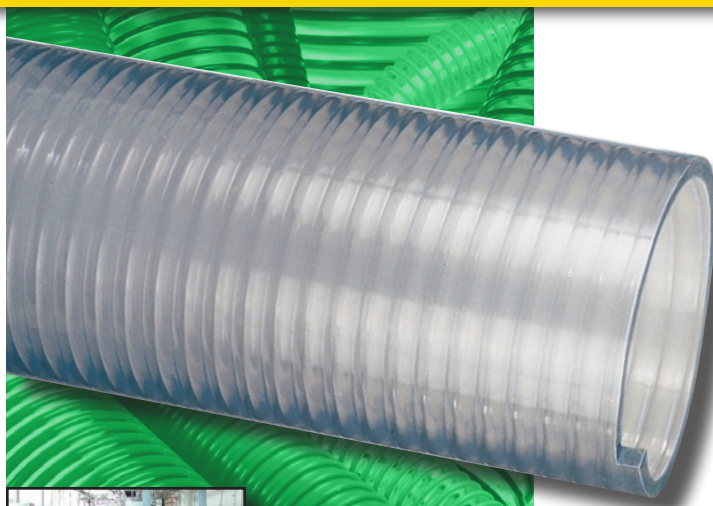

## FT™ Series

### Heavy Duty Food Grade PVC Suction Hose

#### General Applications:

- Food grade liquids such as milk, beer, wine and juice
- Food grade material handling – standard duty
- Ice transfer
- Milk and dairy product transfer
- Poultry processing
- Water suction – heavy duty

**Construction:** PVC tube with rigid PVC helix.

#### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Food Grade Materials** – Hose complies with applicable FDA<sup>(03)</sup> and 3-A<sup>(01)</sup> requirements. Hose complies with applicable USDA<sup>(12)</sup> requirements.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Smooth Outer Cover** – Provides increased pressure rating and smooth surface for banding.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
FT075	3/4	19.0	0.94	24.0	115	75	Full	28	3	100	0.17
FT100	1	25.5	1.28	32.5	100	70	Full	28	3	100	0.24
FT125	1-1/4	32.0	1.56	39.6	90	65	Full	28	4	100	0.44
FT150	1-1/2	38.1	1.80	46.5	85	60	Full	28	6	100	0.50
FT200	2	50.8	2.36	60.0	85	60	Full	26	8	100	0.71
FT250	2-1/2	63.5	2.88	73.2	65	45	Full	26	10	100	0.94
FT300	3	76.2	3.42	86.9	55	40	Full	24	11	100	1.14
FT400	4	101.6	4.51	114.6	50	35	Full	24	18	100/60	1.91
FT500	5	127.0	5.51	140.0	40	25	28	23	28	100/20	2.41
FT600	6	153.4	6.59	167.4	30	20	28	15	48	20	3.28
FT800	8	204.7	8.85	224.7	25	15	28	10	60	20	5.67

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**3A<sup>(01)</sup>, BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, PHTHALATE FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>, USDA<sup>(12)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

## GTF™ Series


### Food Grade PVC Ducting/Material Handling Hose

## GTFE™ Series

### Food Grade PVC Ducting/Material Handling Hose with Grounding Wire

GTF

GTFE  
(with embedded  
grounding wire)

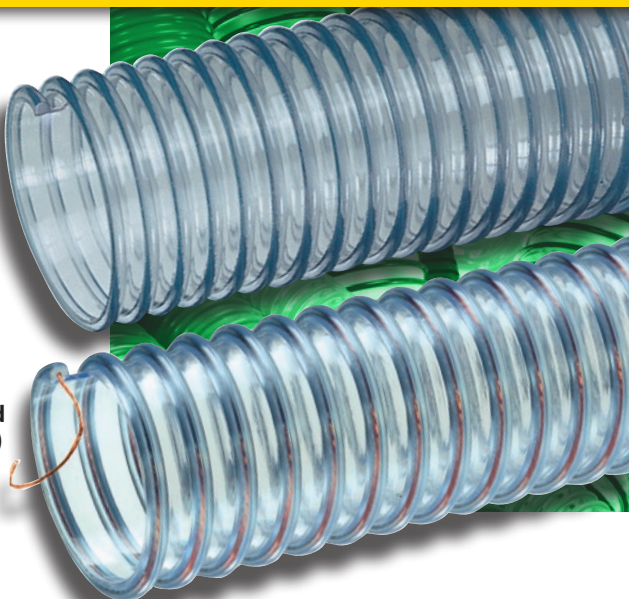

**MADE IN THE  
USA**

**Phthalate  
FREE**

#### General Applications:

- Ducting, ventilation and fume removal
- Food grade blower and ducting systems
- Material handling – light duty
- Pharmaceutical product transfer

**Construction:** PVC tube with rigid PVC helix and grounding wire (GTFE Series).

**Service Temperature Range:**  
-4°F (-20°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Food Grade Materials** – Hose complies with applicable FDA<sup>(03)</sup> and 3-A<sup>(01)</sup> requirements. Hose complies with applicable USDA<sup>(12)</sup> requirements.
- **Grounding Wire (GTFE only)** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.

- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Exposed rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
GTF/GTFE150	1-1/2	38.1	1.82	46.2	20	7	22	14	1	100	0.23
GTF/GTFE200	2	50.8	2.39	60.8	15	6	21	12	2	100	0.30
GTF/GTFE250	2-1/2	63.5	2.89	73.4	10	5	19	10	2	100	0.39
GTF/GTFE300	3	76.2	3.46	87.9	10	5	18	10	3	100/50	0.50
GTF/GTFE400	4	101.6	4.50	114.3	8	4	13	7	3	100/50	0.77
GTF/GTFE600	6	152.4	6.54	166.1	6	3	7	5	6	50	1.08
GTF/GTFE800	8	203.2	8.59	218.2	4	2	5	3	8	50	1.74


**NOTE:** Service life and temperature range may vary depending on operating conditions and material type being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**⚡ CAUTION:** Grounding wire is designed to help dissipate static charge when extracted and connected to ground. Hose is not to be used in combustible situations unless it has been determined by the end user the application if not sufficient to result in propagating brush discharge.

**3A<sup>(01)</sup>, BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, PHTHALATE FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>, USDA<sup>(12)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

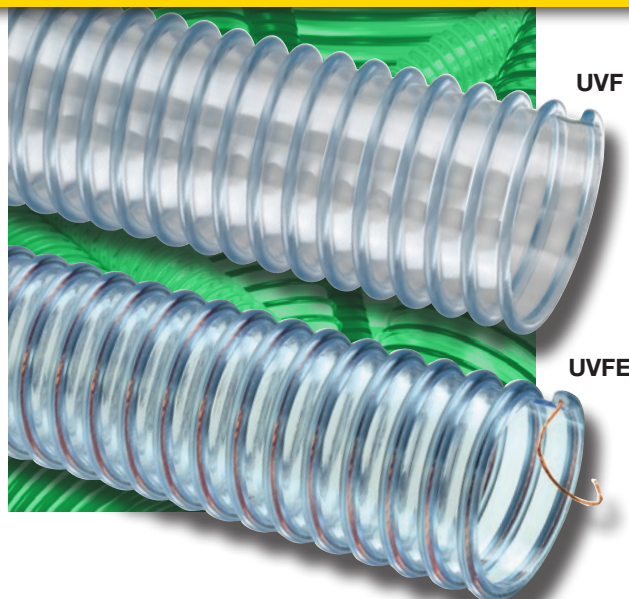

## Urevac™ Food

### UVF™ Series

Food Grade Polyurethane Ducting/Material Handling Hose

### NEW UVFE™ Series

Food Grade Polyurethane Ducting/Material Handling Hose with Grounding Wire

#### General Applications:

- Ducting, ventilation and fume removal
- Dust collection
- Food grade blower and ducting systems
- Food grade material handling – standard duty
- Pharmaceutical product transfer

#### Construction:

Ester polyurethane (TPU) tube with rigid PVC helix and grounding wire (UVFE Series).

#### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Durable Lightweight Polyurethane Tube** – Designed for dry applications where abrasion is a factor. Provides longer hose life and lower operating costs versus similar rubber or PVC hoses.
- **Food Grade Materials** – Hose complies with applicable FDA<sup>(03)</sup> requirements. Hose complies with applicable USDA<sup>(12)</sup> requirements.
- **Grounding Wire (UVFE only)** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials. ⚡
- **Transparent Construction** – “See-the-flow”. Allows for visual confirmation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Exposed rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Oil Resistant Polyurethane Hose** – Resists most animal and petroleum based oils.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating (in Hg)		Min. Bending Radius (in) @ 68°F	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
UVF150	1 1/2	38.1	1.82	46.2	20	7	22	14	1	50	0.23
UVF200	2	50.8	2.39	60.7	15	6	21	12	1.5	50	0.32
UVF250	2 1/2	63.5	2.89	73.4	10	5	19	10	1.5	50	0.39
UVF300	3	76.2	3.46	87.9	10	5	18	10	2.5	50	0.55
UVF/UVFE400	4	101.6	4.50	114.3	8	4	13	8	3	50	0.77
UVF500	5	127.0	5.50	139.7	7	3	10	7	4	50	0.89
UVF600	6	152.4	6.54	166.1	6	3	7	5	5	50	1.15
UVF800	8	203.2	8.59	218.1	4	2	5	3	7	50/20	1.75

**NOTE:** Service life and temperature range may vary depending on operating conditions and material type being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

⚡ **CAUTION:** Grounding wire is designed to help dissipate static charge when extracted and connected to ground. Hose is not to be used in combustible situations unless it has been determined by the end user the application is not sufficient to result in propagating brush discharge.

**BSE/TSE<sup>(02)</sup>, FDA<sup>(03)</sup>, PHthalate Free<sup>(10)</sup>, RoHS<sup>(11)</sup>, USDA<sup>(12)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



NEW  
LENGTHS

# Tiger™ TR1™ Series

## Heavy Duty SBR Wet or Dry Material Handling Hose

### General Applications:

- Fly ash collection
- Grain Handling
- Hydro excavation
- Industrial vacuum equipment
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Rock, gravel, sand and crushed concrete vacuuming
- Sewer truck boom hose
- Shot blast recovery
- Slurry handling

**Construction:** SBR rubber tube with rigid PVC helix.


### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*

### Features and Advantages:

- **Superior Rubber Compounds** – Tigerflex™ uses specially engineered compounds which provide the ideal combination of excellent abrasion resistance, light weight, flexibility, static dissipation and superior long-lasting durability.

- **Static Dissipative Tube** – Specially formulated to help prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **"Cold-Flex" Materials** – Hose remains flexible in sub-zero temperatures.
- **Convuluted Outer Cover** – Provides increased hose flexibility.



## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TR1-150	1-1/2	38.5	1.94	49.2	35	26	Full	28	1.5	100	0.47
TR1-200	2	50.8	2.38	60.5	32	23	Full	26	1.5	100/50	0.65
TR1-250	2-1/2	63.4	3.05	77.5	30	22	Full	26	2.0	100/50	0.84
TR1-300	3	76.2	3.56	90.5	28	20	Full	26	2.5	100/50/20	0.90
TR1-400	4	101.6	4.67	118.5	26	18	Full	26	4.5	100/50/20	1.73
TR1-500	5	126.8	5.73	145.5	21	16	28	24	5.0	100/50/20	3.00
TR1-600	6	153.4	7.03	178.8	19	13	28	24	9.5	100/50/20	4.00
TR1-800	8	204.8	9.27	255.6	19	13	27	23	14	50/20	7.40

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

\*Actual service temperature range is application dependent.


Available with grounding wire upon request. Minimum order required, contact Kuriyama customer service for details.

**RoHS**<sup>(11)</sup>

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



Rated up  
to 220°F!



# Tiger™ “HiTemp” THT™ Series

## Wire Reinforced EPDM Wet or Dry Material Handling Hose

### General Applications:

- Agricultural liquid fertilizer
- Fly ash collection
- Hydroexcavation
- Industrial vacuum equipment
- Material chutes
- Milling machine scrap recovery
- Sewer truck boom hose
- Slurry handling

**Construction:** EPDM tube and polyethylene helix with steel helical wire.

### Service Temperature Range:

-40°F (-40°C) to +220°F (+104°C)\*

### Features and Advantages:

- **Wire Reinforced Helix** – Highly durable steel helical wire provides strength and allows for use at higher temperatures without risk of hose deformation. Wire can be grounded for additional static dissipation.
- **Static Dissipative Tube** - Specially formulated to help prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Convoluted Cover Design** – Provides increased hose flexibility.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
THT300	3	76.2	3.59	91.2	40	33	Full	28	5.5	100	1.33
THT400	4	101.6	4.63	117.6	29	21	Full	26	5.5	100/20	1.90
THT500	5	127.0	5.78	146.8	25	19	Full	25	8.5	100	2.95
THT600	6	152.4	6.87	178.4	19	14	27	24	10.0	100/50/20	3.65
THT800	8	204.8	9.06	229.8	14	10	27	24	15.0	50/20	5.94

**NOTE:** Service life and temperature range may vary depending on operating conditions and material type being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**CAUTION:** Grounding wire is designed to help dissipate static charge when extracted and connected to ground. Hose is not to be used in combustible situations unless it has been determined by the end user the application if not sufficient to result in propagating brush discharge.

**RoHS**<sup>(1)</sup>

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

NEW  
SIZE

# Amphibian™

## AMPH-BK™ Series

### Heavy Duty Polyurethane Lined Wet or Dry Material Handling Hose


Now in  
black!



Also Available:

**SOLARGUARD™**  
ADVANCED UV PROTECTION

**AMPH-SLR™ Series**  
**SOLARGUARD™** version with  
High UV Resistance ideal for  
warmer/sunnier climates



Get more info: [koa.link/solarguard](http://koa.link/solarguard)

#### General Applications:

- Fly ash collection
- Hydro excavation
- Industrial vacuum equipment
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Rock, gravel, sand and crushed concrete vacuuming
- Sewer truck boom hose
- Shot blast recovery
- Slurry handling

**Construction:** Black PVC cover with polyurethane liner and rigid PVC helix.

#### Service Temperature:

-40°F (-40°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Thick Amphibian™ Abrasion Resistant Polyurethane Liner** – Designed for wet or dry applications where severe abrasion is a factor. Provides longer hose life and lower operating costs versus rubber or PVC hoses.
- **Static Dissipative Cover** – Specially formulated to help prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.

- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Convuluted Cover Design** – Provides increased hose flexibility.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
AMPH-BK400	4	101.6	4.76	120.9	35	18	Full	28	8	100	1.95
AMPH-BK500	5	127.0	5.75	146.0	36	18	28	25	15	100/20	2.42
AMPH-BK600	6	152.4	6.81	173.0	30	15	28	25	18	100/20	3.50
AMPH-BK800	8	203.2	9.18	233.2	30	15	28	25	22	50/21	5.91
AMPH-BK1000	10	254.0	11.60	294.6	22	10	24	18	26	20	9.90

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**CAUTION:** Hose is not to be used in combustible situations unless it has been determined by the end user the application is not sufficient to result in propagating brush discharge.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.





# Silver Tiger™

*The closest thing to metal hose™*

## STIG™ Series Extremely Heavy Duty Polyurethane Lined Material Handling Hose

**Our Most  
Internal Abrasion  
Resistant Hose!**



### General Applications:

- Fly ash collection
- Industrial Vacuum Equipment
- Material chutes
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Rock, gravel, sand and crushed concrete vacuuming
- Shot blast recovery

**Construction:** PVC cover with extra thick polyurethane liner, rigid PVC helix and grounding wire.

### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*

### Features and Advantages:

- **Extra Thick Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
STIG250	2-1/2	63.5	3.04	77.2	45	22	Full	28	7	100	0.92
STIG300	3	76.2	3.77	95.8	45	22	Full	28	8	100	1.50
STIG400	4	101.6	4.86	123.5	40	20	Full	28	12	100/20	2.32
STIG500	5	127.0	5.86	148.8	35	18	Full	28	16	60/20	3.43
STIG600	6	153.4	7.18	182.4	35	18	Full	28	20	100/50/20	4.54
STIG800	8	204.8	9.49	241.0	35	18	28	25	25	50/20	7.53

**NOTE:** Service life and temperature range may vary depending on operating conditions and material type being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**CAUTION:** Grounding wire is designed to help dissipate static charge when extracted and connected to ground. Hose is not to be used in combustible situations unless it has been determined by the end user the application if not sufficient to result in propagating brush discharge.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Ureflex™

## UF2™ Series

### Extra Heavy Duty Polyurethane Lined Material Handling Hose

#### General Applications:

- Fly ash collection
- Industrial vacuum equipment
- Material chutes
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Rock, gravel, sand and crushed concrete vacuuming
- Shot blast recovery


**Construction:** PVC cover with polyurethane liner and rigid PVC helix.

#### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Extra Thick Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Static Dissipative Cover** – Specially formulated to help prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **"Cold-Flex" Materials** – Hose remains flexible in sub-zero temperatures.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

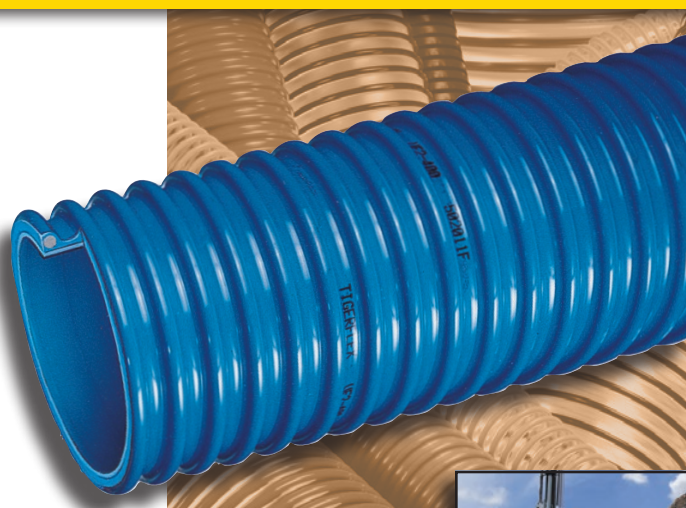

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
UF2-150	1-1/2	38.1	1.88	47.8	50	25	Full	28	3	100	0.46
UF2-200	2	50.8	2.44	62.0	40	20	Full	28	4	100	0.65
UF2-250	2-1/2	63.5	3.12	79.2	40	20	Full	28	5	100	0.89
UF2-300	3	76.2	3.70	94.1	40	20	Full	28	6	100/50	1.23
UF2-400	4	101.6	4.80	122.0	35	18	Full	28	10	100/50	2.02
UF2-500	5	127.0	5.81	147.6	35	18	28	25	15	100/50/20	2.50
UF2-600	6	152.4	6.87	174.5	30	15	28	25	18	100/50/20	3.84
UF2-800	8	203.2	9.18	233.2	30	15	28	25	22	50/20	6.52
UF2-1000	10	254.0	11.61	295.0	25	12	26	20	26	20	10.92

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.


**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**\*Actual service temperature range is application dependent.**

**CAUTION:** Hose is not to be used in combustible situations unless it has been determined by the end user the application is not sufficient to result in propagating brush discharge.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

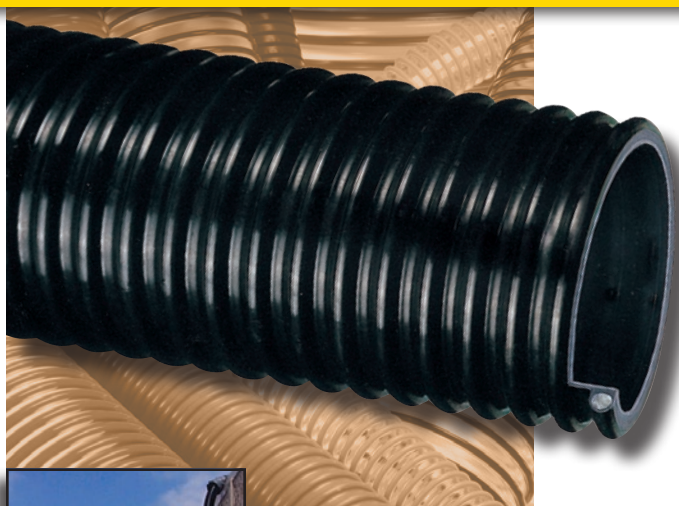

# Ureflex™

## UF1™ Series

### Heavy Duty Polyurethane Lined Material Handling Hose

#### General Applications:

- Agricultural dry fertilizers
- Air seeder lines
- Fly ash collection
- Industrial vacuum equipment
- Material chutes
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Rock, gravel, sand and crushed concrete vacuuming
- Shot blast recovery

**Construction:** PVC cover with polyurethane liner and rigid PVC helix.

#### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Thick Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Static Dissipative Cover** – Specially formulated to help prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
UF1-125	1-1/4	31.8	1.53	39.0	50	25	Full	28	2	100	0.22
UF1-150	1-1/2	38.1	1.85	47.0	50	25	Full	28	2	100/50	0.42
UF1-200	2	50.8	2.40	61.0	40	20	Full	28	3	100/50	0.59
UF1-250	2-1/2	63.5	3.07	78.0	40	20	Full	28	3	100/50	0.80
UF1-300	3	76.2	3.64	92.5	40	20	Full	28	4	100/50	1.18
UF1-350	3-1/2	88.9	4.21	107.0	35	18	Full	28	5	100/50	1.48
UF1-400	4	101.6	4.76	120.9	35	18	Full	28	6	100/50	1.95
UF1-500	5	127.0	5.75	146.0	35	18	28	25	10	100/50/20	2.42
UF1-600	6	152.4	6.81	173.0	30	15	28	25	12	100/50/20	3.50
UF1-800	8	203.2	9.18	233.2	30	15	28	25	18	50/20	5.91
UF1-1000	10	255.0	11.60	294.5	22	10	24	18	26	20/22	9.90

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**CAUTION:** Hose is not to be used in combustible situations unless it has been determined by the end user the application is not sufficient to result in propagating brush discharge.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# Ureflex™

## UFC™ Series

### Heavy Duty Polyurethane Lined Material Handling Hose



#### General Applications:

- Agricultural dry fertilizer
- Air seeder lines
- Industrial vacuum equipment
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Plastic processing equipment
- Shot blast recovery

**Construction:** PVC cover with polyurethane liner and rigid PVC helix.

#### Service Temperature:

-40°F (-40°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Thick Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Static Dissipative Cover** – Specially formulated to help prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
UFC150	1-1/2	38.1	1.85	47.0	50	25	Full	28	2	100	0.42
UFC200	2	50.8	2.40	61.0	40	20	Full	28	3	100	0.59
UFC250	2-1/2	63.5	3.07	78.0	40	20	Full	28	3	100	0.80
UFC300	3	76.2	3.64	92.5	40	20	Full	28	4	100	1.18
UFC400	4	101.6	4.76	120.9	35	18	Full	28	6	100	1.95

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**\*Actual service temperature range is application dependent.**

**CAUTION:** Hose is not to be used in combustible situations unless it has been determined by the end user the application if not sufficient to result in propagating brush discharge.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## UBK™ Series

### Heavy Duty Polyurethane Lined Material Handling Hose

#### General Applications:

- Agricultural dry fertilizers
- Air seeder lines
- Fly ash collection
- Industrial vacuum equipment
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Rock, gravel, sand and crushed concrete vacuuming
- Shot blast recovery



**Construction:** PVC cover with polyurethane liner and rigid PVC helix.

#### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Thick Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Static Dissipative Cover** – Specially formulated to help prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
UBK200	2	50.8	2.40	61.0	40	15	Full	28	2	100/50	0.59
UBK300	3	76.2	3.64	92.5	40	15	Full	28	4	100/50	0.83
UBK400	4	101.6	4.76	120.9	35	13	Full	28	6	100/50	1.37
UBK500	5	127.0	5.69	144.5	30	10	28	15	10	100/50/20	2.28
UBK600	6	152.4	6.81	173.0	30	10	28	15	12	100/50/20	3.10
UBK800	8	203.2	9.02	229.0	30	10	28	15	15	50/20	4.51

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**CAUTION:** Hose is not to be used in combustible situations unless it has been determined by the end user the application is not sufficient to result in propagating brush discharge.

**Phthalate Free<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Urevac™

## UV3™ Series

### Heavy Duty Polyurethane Material Handling Hose With Grounding Wire



#### General Applications:

- Dust collection
- Material handling – heavy duty abrasive
- Milling machine scrap recovery
- Plastic processing equipment
- Trench suction

**Construction:** Single-ply polyurethane tube with rigid PVC helix and grounding wire.

#### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*



#### Features and Advantages:

##### • Thick Abrasion Resistant Single-Ply Polyurethane Tube –

Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.

- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.

- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.

- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.

- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.

- **Oil Resistant Polyurethane Tube** – Resists most animal and petroleum based oils.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
UV3-300	3	76.2	3.60	91.4	40	20	Full	28	9	100/50	0.91
UV3-400	4	101.6	4.66	118.4	35	17	28	25	12	100/50	1.50
UV3-500	5	127.0	5.50	145.0	35	17	28	25	14	50/20	1.82
UV3-600	6	152.4	6.65	172.0	30	15	25	20	16	50/20	2.24
UV3-800	8	203.5	8.76	223.0	30	15	25	20	18	50/20	3.00

**NOTE:** Service life and temperature range may vary depending on operating conditions and material type being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

⚡ **CAUTION:** Grounding wire is designed to help dissipate static charge when extracted and connected to ground. Hose is not to be used in combustible situations unless it has been determined by the end user the application is not sufficient to result in propagating brush discharge.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.





ABRASION  
RESISTANT



"COLD-FLEX"  
MATERIALS



EASY SLIDE



OIL  
RESISTANT



STATIC  
DISSIPATIVE



TRANSPARENT  
CONSTRUCTION



# Urevac™

## UV2™ Series

### Medium Duty Polyurethane Lined Ducting/Material Handling Hose

#### General Applications:

- Agricultural dry fertilizer
- Air seeder lines
- Dust control
- Material handling – medium duty
- Wand hose

**Construction:** PVC cover with ester polyurethane (TPU) liner and rigid PVC helix.

#### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*



#### Features and Advantages:

- **Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus similar rubber or PVC hoses.
- **"Cold-Flex" Materials** – Hose remains flexible in sub-zero temperatures.
- **Static Dissipative Cover** – Specially formulated to help prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **Transparent Construction** – "See-the-flow." Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
UV2-150	1-1/2	38.1	1.87	47.5	25	10	22	16	1.5	60	0.29
UV2-200	2	50.8	2.47	62.7	25	10	21	14	2.5	60	0.40
UV2-250	2-1/2	63.5	2.96	75.2	20	8	19	12	3	60	0.53
UV2-300	3	76.2	3.54	89.8	20	8	18	11	4	60	0.67
UV2-400	4	101.6	4.57	116.1	15	7	13	9	6	60	1.02
UV2-500	5	127.0	5.58	141.7	15	7	10	7	8	60	1.22
UV2-600	6	152.4	6.62	168.1	10	5	7	5	10	60	1.68
UV2-800	8	203.2	8.67	220.2	10	5	5	3	14	20	2.24

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**CAUTION:** Hose is not to be used in combustible situations unless it has been determined by the end user the application if not sufficient to result in propagating brush discharge.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# UVPE™ Series

## Heavy Duty Polyurethane Material Handling Hose With Grounding Wire

### General Applications:

- Material handling – heavy duty abrasive
- Plastic processing equipment

**Construction:** Polyurethane tube with rigid polypropylene helix.

### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*



### Features and Advantages:

- **Thick Abrasion Resistant Polyurethane Tube** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Crush Resistant Construction** – Hose rebounds to shape without structural damage when crushed; material keeps flowing.
- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Oil Resistant Polyurethane Tube** – Resists most animal and petroleum based oils.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
UVPE150	1-1/2	38.1	1.87	47.5	20	7	22	14	3	100	0.39
UVPE200	2	50.8	2.44	62.0	15	6	21	12	4	100	0.48
UVPE250	2-1/2	63.5	2.99	75.9	10	5	19	10	5	100	0.55
UVPE300	3	76.2	3.64	92.5	10	5	18	10	6	100	0.68

**NOTE:** Service life and temperature range may vary depending on operating conditions and material type being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

✓ **CAUTION:** Grounding wire is designed to help dissipate static charge when extracted and connected to ground. Hose is not to be used in combustible situations unless it has been determined by the end user the application is not sufficient to result in propagating brush discharge.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## “Ground Cover”

### GC-C™ Series

#### Heavy Duty Polyurethane Lined Material Handling Hose

##### General Applications:

- Material handling – heavy duty abrasive
- Mulch, bark, wood chips and other surfacing material delivery
- Soil, seed and compost delivery

**Construction:** PVC cover with Polyurethane liner and rigid PVC helix.

##### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*



##### Features and Advantages:

- **Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides longer hose life and lower operating costs versus rubber or PVC hoses.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility. Allows for easier unwinding and winding on hose reels.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
GC-C400	4	101.6	4.59	116.6	30	15	28	25	6	100	1.00
GC-C500	5	127.0	5.57	141.5	30	15	25	20	10	100	1.80

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.




MULCH

## “Mulch Hose”

### MULCH™ Series

Heavy Duty PVC  
Material Handling Hose

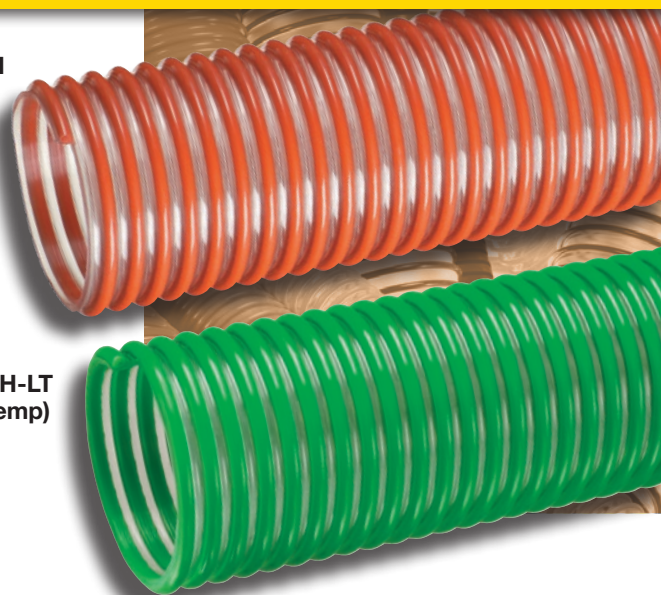

MULCH-LT  
(low temp)

### MULCH-LT™ Series

Heavy Duty PVC  
Low Temperature  
Material Handling Hose

#### General Applications:

- Material handling – standard duty
- Mulch, bark, wood chips and other surfacing material delivery
- Soil, seed and compost delivery

**Construction:** PVC tube and rigid PVC helix.

#### Service Temperature Range (MULCH):

-4°F (-20°C) to +150°F (+65°C)\*

#### Service Temperature Range (MULCH-LT):

-40°F (-40°C) to +150°F (+65°C)\*



#### Features and Advantages:

- **Abrasion Resistant PVC Tube** – Formulated from highly durable PVC compounds for increased abrasion and tear resistance versus standard PVC hoses.
- **“Cold-Flex” Materials (MULCH-LT only)** – Hose remains flexible in sub-zero temperatures.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
MULCH400	4	101.6	4.57	116.0	35	15	Full	28	8	100	1.42
MULCH500	5	127.0	5.61	142.6	30	12	24	22	14	100	1.75
MULCH600	6	153.4	6.79	172.4	25	10	24	22	16	100	2.42
MULCH-LT400	4	101.6	4.57	116.0	35	15	Full	28	8	100	1.35

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# “Bark Hose”

## BARK™ Series

### Standard Duty PVC Material Handling Hose

#### General Applications:

- Lawn and leaf collection
- Material handling – standard duty
- Mulch, bark, wood chips and other surfacing material delivery
- Soil, seed and compost delivery

**Construction:** PVC tube with rigid PVC helix.

**Service Temperature Range:**  
-4°F (-20°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Abrasion Resistant PVC Tube** – Formulated from highly durable PVC compounds for increased abrasion and tear resistance versus standard PVC hoses.
- **Convolutd Outer Cover** – Provides increased hose flexibility. Allows for easier unwinding and winding on hose reels.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
BARK400	4	101.6	4.45	113.0	18	11	15	10	10	100	0.95
BARK500	5	127.0	5.47	138.9	17	10	14	8	11	100	1.29

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Lawn King™

## LK™ Series

## LKC™ Series

### PVC Ducting/Material Handling Hose

LK

LKC



#### General Applications:

- Dust collection
- Lawn and leaf collection
- Material handling – light duty

**Construction:** PVC tube with rigid PVC helix.

#### Service Temperature Range:

-20°F (-29°C) to +150°F (+65°C)\*



#### Features and Advantages:

- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Transparent Construction (LKC series only)** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects

hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
LK/LKC400	4	101.6	4.57	114.8	8	4	13	7	3	100/50	0.85
LKC500	5	128.0	5.55	141.0	7	3	10	6	5	100	0.93
LK/LKC600	6	152.4	6.63	168.3	6	3	7	5	6	100/50	1.34
LKC700	7	177.8	7.56	192.0	4	2	6	4	7	50	1.53
LK/LKC800	8	203.2	8.63	219.3	4	2	5	3	8	50/25	2.00

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.


**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



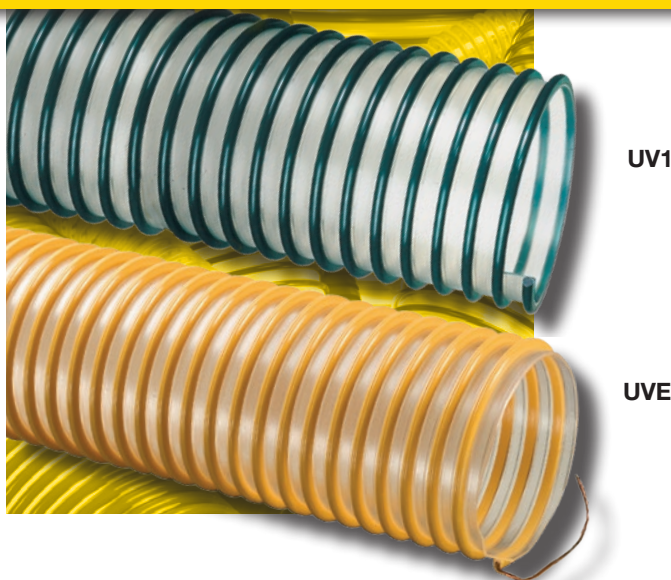

UV1

UVE



## Features and Advantages:

- **Durable Lightweight Polyurethane Tube** – Designed for dry applications where abrasion is a factor. Provides longer hose life and lower operating costs versus rubber or PVC hoses.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Oil Resistant Polyurethane Tube** – Resists most animal and petroleum based oils.
- **Grounding Wire (UVE only)** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It’s embedded within the rigid helix to prevent contamination of transferred materials. ⚡

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)		Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F		UV1	UVE	
UV1-150	1 1/2	38.1	1.82	46.2	20	7	22	14	0.75	50		0.23
UV1/UVE-200	2	50.8	2.39	60.7	15	6	21	12	1.5		100/50	0.32
UV1-250	2 1/2	63.5	2.89	73.4	10	5	19	10	1.5	50		0.39
UV1/UVE-300	3	76.2	3.46	87.9	10	5	18	10	2.5		100/50	0.58
UV1/UVE-400	4	101.6	4.50	114.3	8	4	13	8	3		100/50	0.77
UV1-500/UVE-500	5	127.0	5.50	139.7	7	3	10	7	4	50		0.89
UV1/UVE-600	6	152.4	6.54	166.1	6	3	7	5	5		100/50	1.15
UV1/UVE-800	8	203.2	8.59	218.2	4	2	5	3	7	50	50	1.75

**NOTE:** Service life and temperature range may vary depending on operating conditions and material type being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

⚡ **CAUTION:** Grounding wire is designed to help dissipate static charge when extracted and connected to ground. Hose is not to be used in combustible situations unless it has been determined by the end user the application if not sufficient to result in propagating brush discharge.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

**NEW  
SIZE**

# GT™ Series GTG™ Series

## PVC Ducting/Material Handling Hose

### General Applications:

- Cable protection
- Drain lines
- Ducting, ventilation and fume removal
- Dust collection
- Material handling – light duty

**Construction:** PVC tube with rigid PVC helix.

**Service Temperature Range:**

-4°F (-20°C) to +150°F (+65°C)\*



**MADE IN THE  
USA**

**Phthalate  
FREE**

**GTG now  
Anti-Microbial!**

### Features and Advantages:

- **Transparent Construction (GT series only)** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Anti-Microbial Tube (GTG series only)** – Inhibits growth of bacteria, fungi, mold and yeast.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
GT/GTG150	1-1/2	38.1	1.82	46.2	20	7	22	14	1	100/50	0.23
GT/GTG200	2	50.8	2.39	60.8	15	6	21	12	2	100/50	0.30
GT238	2-3/8	60.3	2.76	70.1	12	6	10	5	2	100	0.38
GT/GTG250	2-1/2	63.5	2.89	73.4	10	5	19	10	2	100/50	0.39
GT/GTG300	3	76.2	3.46	87.9	10	5	18	10	3	100/50	0.50
GT350	3-1/2	88.9	4.02	102.0	9	4	15	8	3	100/50	0.68
GT400	4	101.6	4.50	114.3	8	4	13	7	3	100/50	0.77
GT500	5	127.0	5.50	139.7	7	3	10	6	5	100/50	0.91
GT600	6	152.4	6.54	166.1	6	3	7	5	6	100/50	1.08
GT800	8	203.2	8.59	218.2	4	2	5	3	8	50	1.74
GT1000	10	254.0	11.68	296.6	2	—	2	—	10	50	2.70

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**



Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



EASY SLIDE

TRANSPARENT  
CONSTRUCTION

WATER

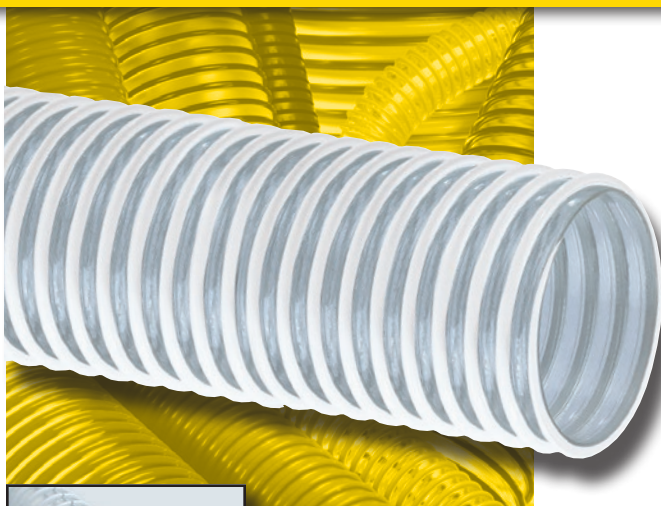**CG-SL**  
(pre-slit)

## “Cover Guard”

### CG™/CG-SL™ Series

#### PVC Ducting and Cover Protection Hose

#### General Applications:

- Cable and hose bundle protection (MSHA)
- Dust collection
- Ducting, ventilation and fume removal
- Mine supply line cover protection

**Construction:** PVC tube with rigid PVC helix.

#### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **MSHA<sup>(08)</sup> Approved** – Meets U.S. Dept. of Labor Administration requirements for flame-resistance for use in mines for protection of hose bundles. Optional, special order, red or green colored helix also approved.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **CG-SL Series** – pre-slit for easy insertion of hose bundles.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
CG-SL100	1	25.4	1.28	31.9	n/a	n/a	n/a	n/a	.5	100	0.14
CG-SL125	1-1/4	31.8	1.51	38.4	n/a	n/a	n/a	n/a	.75	100	0.18
CG-SL150	1-1/2	38.1	1.76	45.1	n/a	n/a	n/a	n/a	1	100	0.21
CG/CG-SL200	2	50.8	2.30	58.4	12	6	10	5	2	100	0.28
CG238	2-3/8	60.3	2.76	70.1	12	6	10	5	2	100	0.38
CG/CG-SL250	2-1/2	63.5	2.81	71.3	10	5	8	4	2	100	0.39
CG/CG-SL300	3	76.2	3.35	85.0	8	4	7	3	3	100	0.45
CG/CG-SL350	3-1/2	88.9	3.83	97.4	8	4	7	3	3	100	0.51
CG/CG-SL400	4	102.4	4.39	111.4	6	3	6	3	3	100	0.64

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**MSHA<sup>(08)</sup>, PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# H<sup>TM</sup> / J<sup>TM</sup> / K<sup>TM</sup> Series

## Standard Duty PVC Suction Hose


### General Applications:

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Mining applications
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

**Construction:** PVC tube with rigid PVC helix.

### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*

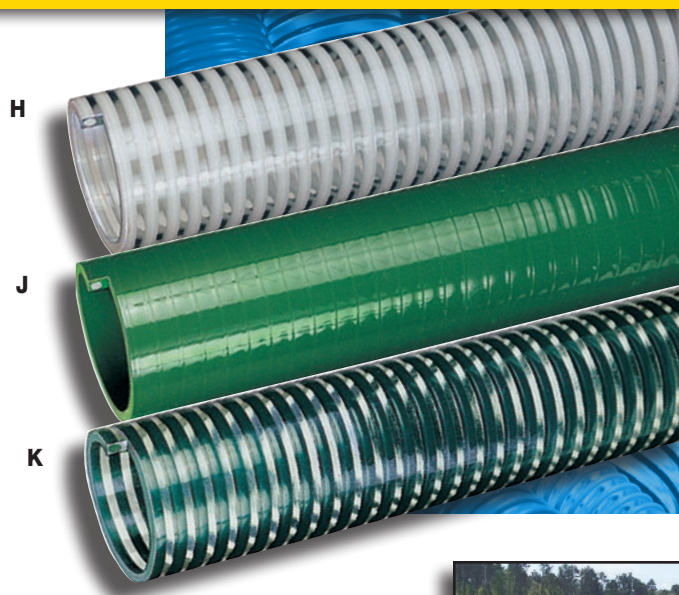

### Features and Advantages:

- **Transparent Construction (H & K Series only)** – “See-the-flow.” Allows for visual confirmation of material flow.
- **MSHA<sup>(07)</sup> Approved (J Series only)** – Approved by the Mine Safety and Health Administration for flame-resistance for use in underground mines as water transfer hose.
- **Smooth Outer Cover (Sizes 3/4" – 5")** – Provides increased pressure rating and smooth surface for banding.
- **Convuluted Outer Cover (Sizes 6" & 8")** – Provides increased hose flexibility.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
H/J/K075	3/4	19.0	1.01	25.6	110	70	28	26	3	100	0.19
H/J/K100	1	25.4	1.26	32.0	85	60	28	26	3	100	0.26
H/J/K125	1-1/4	31.7	1.56	39.6	85	60	28	24	4	100	0.35
H/J/K150	1-1/2	38.1	1.83	46.5	70	50	28	24	5	100	0.48
H/J/K200	2	50.8	2.32	59.0	65	45	28	24	7	100	0.66
H/J/K250	2-1/2	63.5	2.87	73.0	65	45	28	24	8	100	0.87
H/J/K300	3	76.2	3.43	87.0	60	40	28	22	10	100	1.24
H/J/K400	4	101.6	4.50	114.7	50	35	28	22	15	100	1.85
H500	5	127.0	5.58	141.3	45	30	28	24	22	100/20	2.42
H/J/K600	6	152.4	6.75	171.4	40	25	28	20	30	100/20	3.39
H/J/K800	8	203.2	8.86	225.0	30	20	26	20	35	20	5.63

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**MSHA<sup>(07)</sup>, PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# Tiger™ Suction

## F™ /G™ /S™ Series

### Heavy Duty PVC Suction Hose

#### General Applications:

- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Water suction – heavy duty

**Construction:** PVC tube with rigid PVC helix.

#### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*



#### Features and Advantages:

- **Transparent Construction (F Series only)** – “See-the-flow.” Allows for visual confirmation of material flow.
- **“Safety Orange” Color (G Series Only)** – For high visibility on job site. Reduces risk of running or tripping over hose.
- **Smooth Outer Cover (Sizes 3/4" – 4")** – Provides increased pressure rating and smooth surface for banding.
- **Convuluted Outer Cover (Sizes 6" & 8")** – Provides increased hose flexibility.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
F075	3/4	19.0	1.01	25.6	115	75	Full	28	3	100	0.21
F/G/S100	1	25.4	1.26	32.0	100	65	Full	28	3	100	0.27
F/S125	1-1/4	31.7	1.56	39.6	100	65	Full	26	4	100	0.36
F/G/S150	1-1/2	38.1	1.83	46.5	100	65	Full	26	5	100	0.48
F/G/S200	2	50.8	2.38	60.4	100	65	Full	26	7	100	0.71
F/G250	2-1/2	63.5	2.89	73.4	70	48	Full	26	8	100	0.96
F/G/S300	3	76.2	3.44	87.4	70	45	Full	26	10	100	1.25
F/G400	4	101.6	4.57	116.1	60	40	Full	26	15	100	1.95
F/G600	6	152.4	6.77	172.0	40	25	28	22	25	100/20	3.76
G800	8	203.2	8.90	226.1	30	20	28	18	30	20	6.00

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# “Blue Water” BW™ Series Low Temperature PVC Suction Hose



## General Applications:

- Extreme cold conditions
- Pumps, rental and construction dewatering
- Pumps, trash
- Water suction – standard duty

**Construction:** PVC tube with rigid PVC helix.

## Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*



## Features and Advantages:

- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures. Beware of imitations! Blue Water™ truly remains flexible in extreme cold.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Smooth Outer Cover (Sizes 1" - 4")** – Provides increased pressure rating and smooth surface for banding.
- **Convuluted Outer Cover (Sizes 5" & 6")** – Provides increased hose flexibility.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
BW075	3/4	19.1	1.01	25.6	115	75	Full	28	3	100	0.19
BW100	1	25.4	1.26	32.0	90	65	Full	28	3	100	0.22
BW125	1-1/4	31.8	1.56	39.6	90	65	Full	26	4	100	0.36
BW150	1-1/2	38.1	1.79	45.5	90	65	Full	26	5	100	0.48
BW200	2	50.8	2.35	59.8	90	65	Full	26	7	100	0.62
BW250	2-1/2	63.5	2.87	73.0	70	48	Full	26	8	100	0.87
BW300	3	76.2	3.43	87.0	65	45	Full	26	10	100	1.23
BW400	4	101.6	4.49	114.0	55	40	Full	26	15	100	1.83
BW500	5	127.0	5.57	141.5	45	30	28	24	25	100/20	2.42
BW600	6	152.4	6.69	170.0	40	25	28	22	30	100/20	3.36

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**NOTE:** Refer to Storage and Handling, and Max Coil Stack Height on page 65.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.





ABRASION  
RESISTANT



"COLD-FLEX"  
MATERIALS



STATIC  
DISSIPATIVE



WATER



# Cold Flex™

## CF™ Series

### Extra Heavy Duty Low Temperature PVC Suction Hose

#### General Applications:

- Extreme cold conditions
- Irrigation lines
- Material handling – standard duty
- Pumps, rental and construction dewatering
- Pumps, trash
- Slurry handling
- Water suction – heavy duty

**Construction:** PVC tube with rigid PVC helix.

**Service Temperature Range:**

-40°F (-40°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **Superior Vacuum Rating** – Our toughest and most durable liquid suction hose! Extremely thick hose tube and extra large helix provide for a tough, durable hose with all sizes rated to full vacuum (at 68°F).
- **Cold Flex™ Materials** – Hose remains flexible in severe sub-zero temperatures.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Static Dissipative Tube** – Specially formulated to help prevent the build-up of static electricity for added safety and help keep material flowing smoothly.



## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
CF150	1-1/2	38.1	1.84	46.7	100	65	Full	28	3	100	0.40
CF200	2	50.8	2.41	61.2	100	65	Full	28	4	100	0.75
CF250	2-1/2	63.5	2.93	74.5	90	55	Full	28	6	100	0.99
CF300	3	76.2	3.59	91.2	80	50	Full	28	7	100	1.34
CF400	4	101.6	4.67	118.6	65	35	Full	28	11	100	2.15
CF600	6	152.4	6.87	174.4	50	25	Full	28	18	100/50/20	3.76
CF800†	8	204.8	9.13	232.0	35	15	Full	26	24	20	5.92

†NOTE: Non-stock item. Special order, minimums required. Contact your nearest KOA warehouse location for more information.

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

CAUTION: Hose is not to be used in combustible situations unless it has been determined by the end user the application is not sufficient to result in propagating brush discharge.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# W™ Series

## Heavy Duty PVC Liquid Suction Hose

### General Applications:

- Extreme cold conditions (Sizes 4" - 16")
- Fish suction
- Gold dredging
- Pumps, rental and construction dewatering
- Pumps, trash
- Slurry handling
- Water suction – heavy duty

**Construction:** PVC tube with rigid PVC helix.

### Service Temperature Range:

Sizes 1" - 3": -4°F (-20°C) to +150°F (+65°C)\*;  
 Sizes 4" - 16": -40°F (-40°C) to +150°F (+65°C)\*

### Features and Advantages:

- **"Cold-Flex" Materials (Sizes 4" - 16")** – Hose remains flexible in sub-zero temperatures.
- **Transparent Construction** – "See-the-flow." Allows for visual confirmation of material flow.



**The Original  
Heavy Duty Suction  
Hose**

- **Convolute Outer Cover** – Provides increased hose flexibility.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
W100	1	25.4	1.30	33.0	55	35	Full	28	1	100	0.21
W125	1-1/4	31.7	1.60	40.6	50	30	Full	28	2	100	0.28
W150	1-1/2	38.1	1.85	47.0	50	30	Full	28	2	100	0.34
W200	2	50.8	2.40	61.0	50	30	Full	28	3	100	0.52
W250	2-1/2	63.5	2.99	75.9	45	25	Full	28	4	100	0.77
W300	3	76.2	3.64	92.5	45	25	Full	28	6	100	1.18
W400	4	101.6	4.76	121.0	35	18	Full	28	8	100	1.92
W500	5	127.0	5.75	146.0	35	18	28	25	12	100/20	2.95
W600	6	152.4	7.00	177.8	30	15	28	25	14	100/20	3.76
W800	8	203.2	9.18	233.2	30	15	28	25	24	40/20	5.99
W1000	10	254.0	11.56	293.5	25	12	28	25	39	40/20	9.74
W1200	12	304.8	13.64	346.5	20	10	28	25	59	40/20	12.77
W1400†	14	357.6	15.59	396.0	18	8	26	23	80	20	13.50
W1600†	16	408.4	17.72	450.0	12	5	24	20	95	20	16.00

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.


**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

†Non-stock item, minimum order required. Contact Kuriyama customer service for details.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

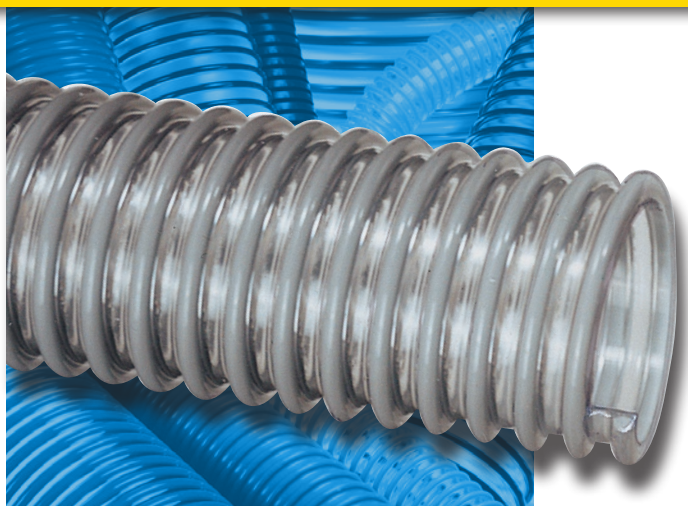

## WH™ Series

### Standard Duty PVC Liquid Suction Hose

## SH™ Series

### Standard Duty Low Temperature PVC Liquid Suction Hose

**Our Most  
Flexible Suction  
Hose**



#### General Applications:

- Drain lines
- Dust collection
- Gold dredging
- Water suction – standard duty

**Construction:** PVC tube with rigid PVC helix.

**Service Temperature Range (WH Series):**  
-4°F (-20°C) to +150°F (+65°C)\*

**Service Temperature Range (SH Series):**  
-40°F (-40°C) to +150°F (+65°C)\*

#### Features and Advantages:

- **"Cold-Flex" Materials (SH Series; Sizes 2½" - 8")** – Hose remains flexible in sub-zero temperatures.
- **Transparent Construction** – "See-the-flow." Allows for visual conformation of material flow.

- **Convuluted Outer Cover** – Provides increased hose flexibility.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
WH100	1	25.4	1.22	31.0	45	15	Full	24	1	100	0.15
WH125	1-1/4	31.8	1.54	39.2	40	12	Full	24	1	100	0.20
WH150	1-1/2	38.1	1.80	45.7	40	12	Full	24	1.5	100	0.25
WH200	2	50.8	2.32	58.7	35	10	26	20	2.5	100	0.31
SH250	2-1/2	63.5	9.97	75.5	30	9	24	18	3	100	0.43
SH300	3	76.2	3.48	88.4	25	7	24	18	4	100	0.64
SH400	4	101.6	4.52	114.8	25	7	18	14	6	100	1.06
SH500	5	127.0	5.57	141.5	20	6	16	12	10	100	1.47
SH600	6	153.4	6.69	169.9	20	6	14	10	12	100	2.27
SH800	8	204.8	8.86	225.0	10	3	12	8	24	60	3.34

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# WST™ Series

## Heavy Duty PVC Fabric Reinforced Suction & Discharge Hose

### General Applications:

- Fish suction
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Suction and discharge
- Water suction – heavy duty


**Construction:** Double-ply PVC tube, polyester fabric reinforcement and rigid PVC helix.

### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*

### Features and Advantages:

- **Fabric Reinforcement** – Designed with high tensile strength polyester yarn jacket to handle both suction and higher pressure discharge applications.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.

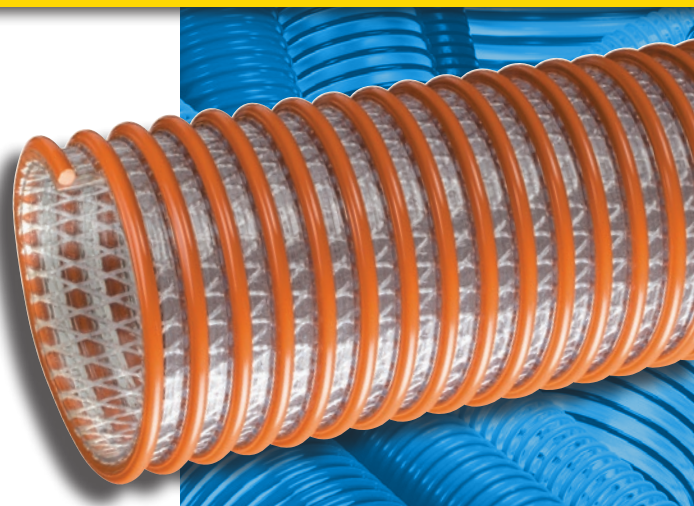


### Also Available:

**SOLARGUARD™**  
ADVANCED UV PROTECTION

**WST-SLR™ Series**  
**SOLARGUARD™** version  
with High UV Resistance  
ideal for warmer/sunnier  
climates

**Get more info:** [koa.link/solarguard](http://koa.link/solarguard)



## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
WST150	1-1/2	38.1	1.95	49.5	110	70	Full	28	2.5	100	0.42
WST200	2	50.8	2.60	66.0	100	65	Full	28	4	100	0.74
WST300	3	76.2	3.62	92.0	100	50	Full	28	6	100/20	1.13
WST400	4	101.6	4.76	121.0	75	37	Full	28	8	100/20	1.74
WST500	5	127.0	5.98	151.9	70	35	28	25	11	100/20	2.95
WST600	6	152.4	7.17	182.1	70	35	28	25	13	100/20	3.88
WST800	8	203.5	9.21	234.0	60	30	26	20	18	25/20	5.57


**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

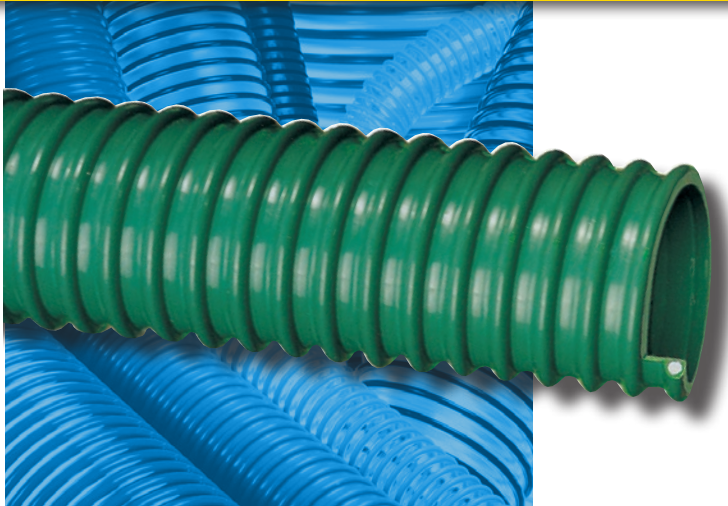

## WG™ Series

### Heavy Duty PVC Liquid Suction Hose

#### General Applications:

- Fish suction
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – heavy duty

**Construction:** PVC tube with rigid PVC helix.

#### Service Temperature Range:

-4°F (-40°C) to +150°F (+65°C)\*



#### Features and Advantages:

- **Highly Durable PVC Tube** – Formulated from highly durable PVC compound for increased abrasion and tear resistance.
- **Convuluted Outer Cover** – Provides increased hose flexibility.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
WG150	1-1/2	38.1	1.85	47.0	50	25	Full	28	2	100	0.34
WG200	2	50.8	2.40	61.0	50	25	Full	28	3	100	0.52
WG300	3	76.2	3.64	92.5	45	25	Full	28	6	100	1.18
WG400	4	101.6	4.76	120.9	35	18	Full	28	8	100	1.93

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# “Marine Hose”

## MH™ Series PVC Suction Hose

### General Applications:

- Drain lines
- Marine bilge discharge
- Marine plumbing
- Recreational vehicle (RV) plumbing

**Construction:** PVC tube with rigid PVC helix.


### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*



### Features and Advantages:

- **Odor-resistant Tube** – Special additives help eliminate the build-up of unwanted odors.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Easy Installation** – Ideal for working in confined areas. Permits installers to make smooth, tight turns. Requires fewer fittings than rigid pipe.



**Custom Molded Cuff** — 1½" Molded cuff (shown above) is designed for use with Tigerflex® Series MH150 marine hose.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
MH100	1	25.4	1.22	31.0	45	15	Full	24	1	100	0.15
MH125	1-1/4	32.0	1.49	38.0	40	12	Full	24	1.5	100	0.20
MH150	1-1/2	38.1	1.77	45.0	40	12	Full	24	2	100	0.25
MH200	2	50.8	2.32	59.0	35	10	26	20	2.5	100	0.31

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.


**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



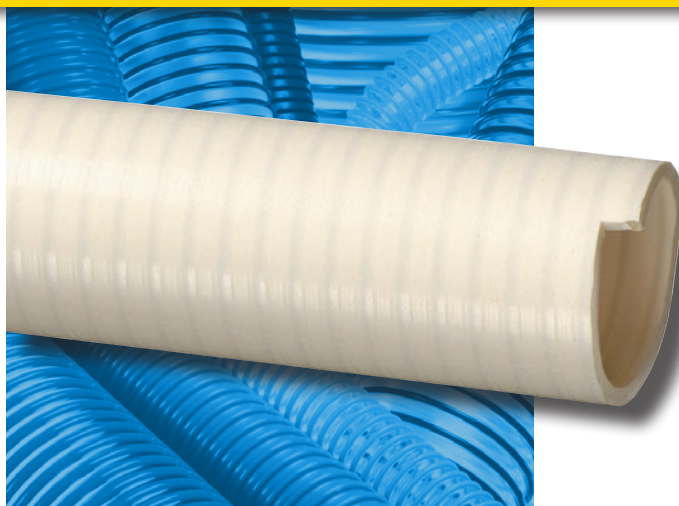

## “Spa Hose” FMCR™ Series PVC Suction Hose

### General Applications:

- Commonly referred to as “flex pipe”
- Drain lines
- Spa, pool and hot tub plumbing

**Construction:** PVC tube with rigid PVC helix.

### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*



### Features and Advantages:

- **Precision Controlled OD** – Designed to be glued into Schedule 40 PVC fittings.
- **Easy Installation** – Ideal for working in confined areas. Permits installers to make smooth, tight turns. Requires fewer fittings than rigid pipe when plumbing a normal spa or hot tub application.

## Nominal Specifications

Series Number	IPS Size (in)	OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
		(in)	(mm)	68°F	104°F	68°F	104°F			
F16MCR	1/2	0.850	21.59	100	70	28	26	2	100/50	0.14
F20MCR	3/4	1.053	26.75	100	70	28	26	2	100/50	0.21
F27MCR	1	1.320	33.53	100	70	28	24	3	100/50	0.28
F36MCR	1-1/4	1.663	42.24	80	55	28	24	4	100/50	0.37
F42MCR	1-1/2	1.904	48.36	70	50	28	24	4	100/50	0.44
F52MCR	2	2.381	60.48	70	50	28	24	6	100/50	0.58
F78MCR	3	3.500	88.90	65	40	28	22	8	50	1.20

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**NOTE:** Use with recommended primers and PVC cements; consult with glue supplier for recommendations. Coils of Tigerflex® Spa Hose should not be stacked more than five coils high. Hose which has been stacked high may be damaged over time.

**NOTE:** Black color available upon request. Minimum order quantity may apply. Contact Kuriyama customer service for details.

\*Actual service temperature range is application dependent.

### WARNING

This product can expose you to DINP, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

### Product Warning

Like other materials, Spa Hoses can be damaged by rodents or insects, including termites. Our warranty does not cover damages caused by them. Spa Hose should not be used underground in areas infested by termites. This product warning shall be given to every purchaser of Spa Hose. (Rev. 7/98)

**RoHS**(11)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Tiger™ Green

## TG™ Series

### EPDM Suction Hose

#### General Applications:

- Agriculture liquid fertilizers
- Irrigation lines
- Liquid manure handling
- Marine bilge discharge
- Pumps, rental and construction dewatering
- Pumps, trash
- Septic and wastewater handling
- Used frack solution removal
- Water suction – standard duty


**Construction:** EPDM tube with polyethylene helix.

#### Service Temperature Range:

-40°F (-40°C) to +160°F (+71°C)\*

#### Features and Advantages:

- **Superior Rubber Compounds** – Tigerflex™ uses only the best available EPDM compounds, which provide the ideal combination of light-weight, flexibility, durability and chemical resistance.
- **Superior Flexibility** – Our tests show up to 22% more flexible than the competition, especially in sub-zero weather! Tiger™ Green Hose is more flexible coming off the truck and easier to handle than other similar hoses.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces and around corners. Easy-to-handle.
- **Convolutd Outer Cover** – Provides increased hose flexibility.
- **"Cold-Flex" Materials** – Hose remains flexible in sub-zero temperatures.



## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TG100	1	25.4	1.40	35.5	65	45	FULL	28	2	100	0.28
TG125	1-1/4	31.8	1.63	41.4	60	40	FULL	28	3	100	0.33
TG150	1-1/2	38.1	1.93	49.0	50	35	FULL	28	3	100	0.44
TG200	2	50.8	2.51	63.8	50	35	FULL	28	5	100	0.67
TG250	2-1/2	63.5	3.07	78.0	45	30	FULL	28	5.5	100	0.95
TG300	3	76.2	3.60	91.5	45	30	FULL	26	7	100	1.14
TG400	4	101.6	4.70	119.5	40	25	FULL	26	11.5	100	1.84
TG600	6	152.4	6.85	174.0	30	20	28	24	20	100/20	3.07

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**NOTE:** Other colors available upon request. Minimum order quantity may apply. Contact Kuriyama Tigerflex department for details.

**NOTE:** Contact your nearest KOA warehouse for availability of 50 ft. lengths.

\*Actual service temperature range is application dependent.

**RoHS**(11)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.




"COLD-FLEX"  
MATERIALS



EASY SLIDE



WATER



## Tiger™ Yellow TY™ Series EPDM Suction Hose

### General Applications:

- Agriculture liquid fertilizers
- Irrigation lines
- Liquid manure handling
- Marine bilge discharge
- Pumps, rental and construction dewatering
- Pumps, trash
- Septic and wastewater handling
- Used frack solution removal
- Water suction – standard duty

**Construction:** EPDM tube with polyethylene helix.

### Service Temperature Range:

-40°F (-40°C) to +160°F (+71°C)\*

### Features and Advantages:

- **Superior Rubber Compounds** – Tigerflex™ uses only the best available EPDM compounds, which provide the ideal combination of light-weight, flexibility, durability and chemical resistance.
- **Superior Flexibility** – Our tests show up to 22% more flexible than the competition, especially in sub-zero weather! Tiger™ Yellow Hose is more flexible coming off the truck and easier to handle than other similar hoses.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces and around corners. Easy-to-handle.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **"Cold-Flex" Materials** – Hose remains flexible in sub-zero temperatures.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TY100	1	25.4	1.40	35.5	65	45	FULL	28	2	100	0.28
TY125	1-1/4	31.8	1.63	41.4	60	40	FULL	28	3	100	0.33
TY150	1-1/2	38.1	1.93	49.0	50	35	FULL	28	3	100	0.44
TY200	2	50.8	2.51	63.8	50	35	FULL	28	5	100	0.67
TY300	3	76.2	3.60	91.5	45	30	FULL	26	7	100	1.14
TY400	4	101.6	4.70	119.5	40	25	FULL	26	11.5	100	1.84

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**NOTE:** Contact your nearest KOA warehouse for availability of 50 ft. lengths.

\*Actual service temperature range is application dependent.


**RoHS**<sup>(11)</sup>

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# Tiger™ Red TRED™ Series

# Tiger™ Blue TBLU™ Series EPDM Suction Hoses

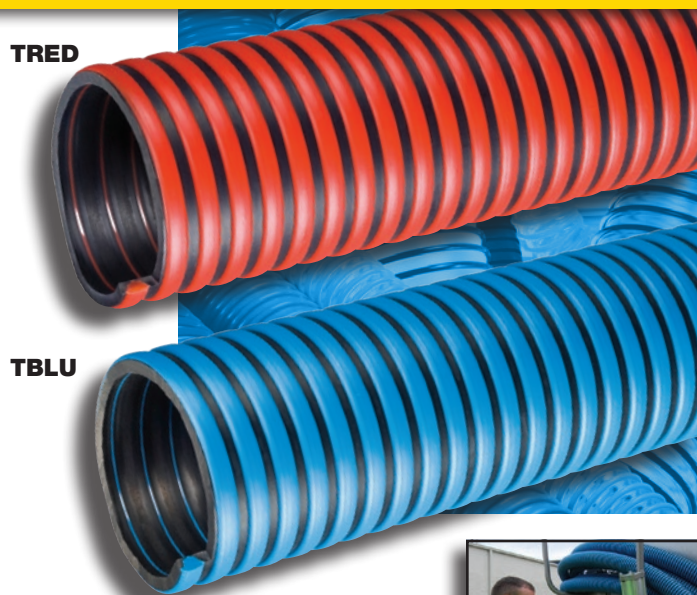

## General Applications:

- Agriculture liquid fertilizers
- Irrigation lines
- Liquid manure handling
- Marine bilge discharge
- Pumps, rental and construction dewatering
- Pumps, trash
- Septic and wastewater handling
- Used frack solution removal
- Water suction – standard duty

**Construction:** EPDM tube with polyethylene helix.

## Service Temperature Range:

-40°F (-40°C) to 160°F (+71°C)\*

## Features and Benefits:

- **Superior Rubber Compounds** – Tigerflex™ uses only the best available EPDM compounds, which provide the ideal combination of light-weight, flexibility, durability and chemical resistance.
- **Superior Flexibility** – Our tests show up to 22% more flexible than the competition, especially in sub-zero weather! Tiger™ Red and or Tiger™ Blue Hose is more flexible coming off the truck and easier to handle than other similar hoses.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces and around corners. Easy-to-handle.
- **Convolutd Outer Cover** – Provides increased hose flexibility.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Color Choices** – Choose from colors red or blue to match company equipment.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TRED/TBLU200	2	50.8	2.51	63.8	50	35	FULL	28	5	100	0.67
TRED/TBLU300	3	76.2	3.60	91.5	45	30	FULL	26	7	100	1.14
TRED/TBLU400	4	101.6	4.70	119.5	40	25	FULL	26	11.5	100	1.84

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**NOTE:** Contact your nearest KOA warehouse for availability of 50 ft. lengths.

\*Actual service temperature range is application dependent.

**RoHS**<sup>(11)</sup>

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



"COLD-FLEX"  
MATERIALS



EASY SLIDE



WATER

tigerflex



NEW  
SIZE

## Tiger™ TSD™ Series EPDM Fabric Reinforced Suction & Discharge Hose

### General Applications:

- Agriculture liquid fertilizers
- Agri-foam systems
- Liquid manure handling
- Pumps, rental and construction dewatering
- Pumps, trash
- Septic and wastewater handling
- Suction and discharge
- Water suction – heavy duty

**Construction:** Double-ply EPDM, polyester fabric reinforcement and polyethylene helix.

### Service Temperature Range:

-40°F (-40°C) to +160°F (+71°C)\*



### Features and Advantages:

- **Superior Rubber Compounds** – Tigerflex™ uses only the best available EPDM compounds, which provide the ideal combination of light-weight, flexibility, durability and chemical resistance.
- **Fabric Reinforcement** – Designed with high tensile strength polyester yarn jacket to handle both suction, and higher pressure discharge applications.
- **"Cold-Flex" Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces and around corners. Easy-to-handle.
- **Convuluted Outer Cover** – Provides increased hose flexibility.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TSD125	1-1/4	31.8	1.70	43.2	100	75	FULL	28	3	100	0.41
TSD150	1-1/2	38.1	2.00	50.7	100	75	FULL	28	3	100	0.51
TSD200	2	50.8	2.54	64.5	100	75	FULL	28	5	100	0.73
TSD300	3	76.2	3.62	92.0	90	65	FULL	26	8	100	1.18
TSD400	4	101.6	4.53	121.0	75	50	28	26	9.5	100	1.40

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

**NOTE:** Contact your nearest KOA warehouse for availability of 50 ft. lengths.


\*Actual service temperature range is application dependent.

RoHS<sup>(11)</sup>

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# WOR™ Series

## Standard Duty Oil Resistant PVC Suction Hose

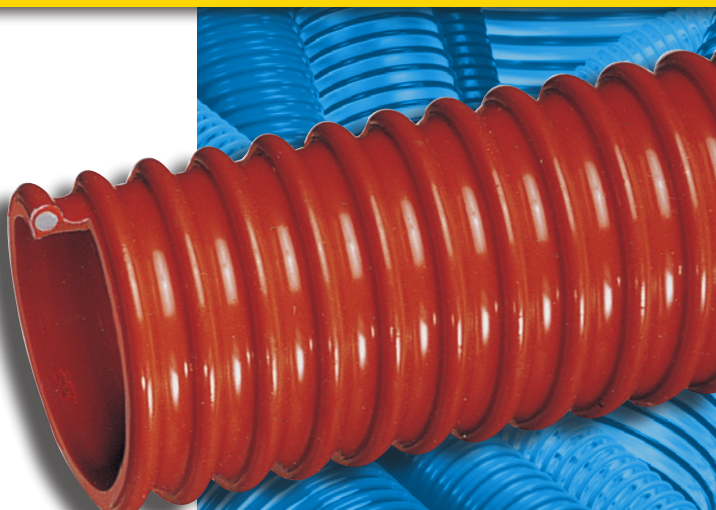

### General Applications:

- Environmental clean-up
- Oil skimming
- Oil slurries
- Oil suction
- Vapor recovery – hydrocarbon emissions

**Construction:** Oil resistant PVC tube with rigid PVC helix.

### Service Temperature Range:

5°F (-15°C) to +150°F (+65°C)\*



### Features and Advantages:

- **Oil Resistant PVC** – Made with special oil resistant compounds which exhibit medium resistance to oil and other hydrocarbons.
- **Convuluted Outer Cover** – Provides increased hose flexibility.

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
WOR150	1-1/2	38.1	1.92	48.8	50	25	28	24	3	100	0.31
WOR200	2	50.8	2.40	61.0	40	20	28	24	4	100	0.50
WOR300	3	76.2	3.64	92.5	40	20	28	24	6	100	1.17
WOR400	4	101.6	4.72	119.9	35	18	28	22	10	100	1.74

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.


**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



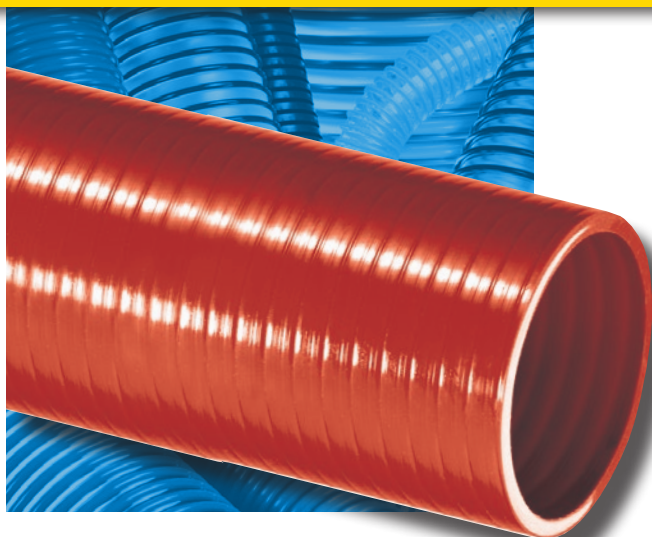

## ORV™ Series

### Standard Duty Oil Resistant PVC Suction Hose

#### General Applications:

- Environmental cleanup
- Oil skimming
- Oil slurries
- Oil suction
- Vapor recovery – hydrocarbon emissions

**Construction:** Oil resistant PVC tube with rigid PVC helix.

#### Service Temperature:

5°F (-15°C) to +150°F (+65°C)\*



#### Features and Benefits:

- **Oil Resistant PVC Tube** – Made with special oil resistant compounds which exhibit medium resistance to oil and other hydrocarbons.
- **Smooth Outer Cover** – Provides increased pressure rating and smooth surface for banding.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
ORV075	3/4	19.0	1.01	25.6	100	60	28	26	3	100	0.19
ORV100	1	25.4	1.26	32.0	80	50	28	26	3	100	0.24
ORV150	1-1/2	38.1	1.76	44.6	60	40	28	24	5	100	0.35
ORV200	2	50.8	2.32	59.0	60	40	28	24	7	100	0.55
ORV300	3	76.2	3.41	86.7	65	40	28	22	10	100	1.09

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Oil Vac™

## OV™ Series

### Heavy Duty Oil Resistant Polyurethane Suction Hose



#### General Applications:

- Material handling - heavy duty abrasive
- Material chutes
- Oil suction – heavy duty

**Construction:** Polyurethane tube with rigid PVC helix.

#### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*



#### Features and Advantages:

- **Oil Resistant Polyurethane Tube** – Handles most fuels and oils. Excellent resistance to gasoline, diesel, ethanol, blends (up to E30) and biodiesels (up to B100).
- **Abrasion Resistant Polyurethane Tube** – Solid polyurethane tube outlasts other materials when severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.

### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
OV100	1	25.4	1.26	32.0	85	60	28	26	3	100	0.23
OV125	1-1/4	31.7	1.49	37.8	85	60	28	24	5	100	0.30
OV150	1-1/2	38.1	1.76	44.6	70	50	28	24	5	100	0.35
OV200	2	50.8	2.32	59.0	65	45	28	24	7	100	0.55

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



- For food grade and non-food grade applications.
- Easy assembly.
- Provides smoother surface for banding behind coupling.

## Banding Coils

### Rigid PVC Coils



- Packaged singly: One piece to make one complete hose assembly coupled at each end.
- Cut one piece in half into two equal pieces; thread between hose helix.

#### BCCF™ Series

- Clear, food grade, rigid PVC coils
- For hoses with a high-profile, counterclockwise helix\*

#### Food Grade, High-Profile, Counterclockwise Coils

##### Nominal Specifications

Part Number	Fits Hose ID (in)	Color	Weight (lbs/ea)
BCCF1.5	1-1/2	Clear	0.20
BCCF2	2	Clear	0.30
BCCF3	3	Clear	0.60
BCCF4	4	Clear	0.90
BCCF5	5	Clear	1.10
BCCF6	6	Clear	1.30
BCCF8	8	Clear	1.40

#### BCWF™ Series

- White, food grade, rigid PVC coils
- For hoses with a low-profile, counterclockwise helix\*

#### Food Grade, Low-Profile, Counterclockwise Coils

##### Nominal Specifications

Part Number	Fits Hose ID (in)	Color	Weight (lbs/ea)
BCWF2	2	White	0.25
BCWF3	3	White	0.45

#### BCRT™ Series

- Gray non-food grade, rigid PVC coils
- For hoses with a high-profile, clockwise helix\*

#### Non-Food Grade, High-Profile, Clockwise Coils

##### Nominal Specifications

Part Number	Fits Hose ID (in)	Color	Weight (lbs/ea)
BCRT2	2	Gray	0.30
BCRT3	3	Gray	0.60
BCRT4	4	Gray	0.90

#### For TV™ Vapor Recovery Hoses

##### Nominal Specifications

Part Number	Fits Hose ID (in)	Color	Weight (lbs/ea)
BCYL2	2.02	Yellow	0.25
BCYL3	3.03	Yellow	0.45
BCYL4	4.04	Yellow	0.75

\*Refer to Tigerflex Accessories compatibility chart on page 60-62.



Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.





## Banding Sleeves

### Flexible PVC Sleeves



- Helps prevent overbending near the coupling.
- Cut into approximately 12-inch lengths; screw onto hose at each end.

#### SLV-VLT™ Series

- Clear, food grade, static dissipative PVC
- For hoses with a high-profile, counterclockwise helix\*

#### Nominal Specifications

Part Number	Fits Hose ID (in)	Color	Standard Length (ft)	Weight (lbs/ea)
SLV-VLT3X3	3	Clear	3	3.50
SLV-VLT4x3	4	Clear	3	4.29

#### SLV-DRP™ Series

- Green, non-food grade flexible PVC
- For hoses with a high-profile, counterclockwise helix\*

#### Nominal Specifications

Part Number	Fits Hose ID (in)	Color	Standard Length (ft)	Weight (lbs/ea)
SLV-DRP3X3	3.03	Green	3	3.06
SLV-DRP4X3	4.04	Green	3	4.29

#### SLV-VAP™ Series

- Yellow, non-food grade flexible PVC
- For hoses with low-profile, counterclockwise helix\*

#### Nominal Specifications


Part Number	Fits Hose ID (in)	Color	Standard Length (ft)	Weight (lbs/ea)
SLV-VAP2X3	2.02	Yellow	3	1.80
SLV-VAP3X3	3.03	Yellow	3	3.09
SLV-VAP4X3	4.04	Yellow	3	4.20

#### For NDH™ Drop and Transfer Hoses

#### Nominal Specifications

Part Number	Fits Hose ID (in)	Color	Standard Length (ft)	Weight (lbs/ea)
SLV-NDH2X3	2.02	Gray	3	1.83
SLV-NDH3X3	3.03	Gray	3	3.06
SLV-NDH4X3	4.04	Gray	3	4.29

\*Refer to Tigerflex Accessories compatibility chart on pages 60-62.

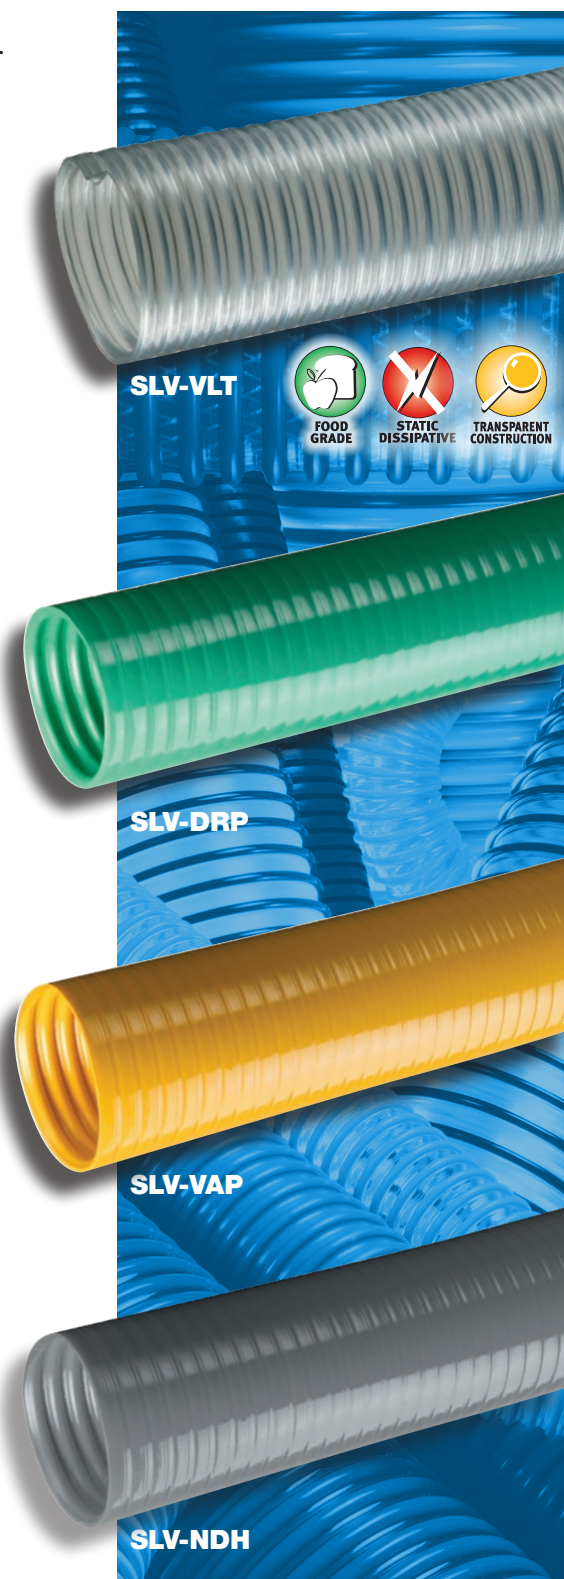

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

**NEW  
SIZES**

## TigerClamps™ Spiral Double Bolt Clamps



- Zinc plated carbon steel and stainless steel.
- Two or more TigerClamps™ are suggested for 3" ID and larger hoses.
- Both hex nuts should be tightened equally to prevent leakage.
- Caution: proper evaluation of holding power for each clamp must be determined for each individual application.

### For Counterclockwise Helix Hoses

*Designed to fit most Tigerflex Hoses\**

#### Nominal Specifications

Part Number	Fits Hose ID (in)	Torque (ft. lbs.)	Weight Each (lbs)	Standard Carton Qty.
SDBC-1.5	1-1/2	6	0.18	100
SDBC-2	2	6	0.36	100
SDBC-2.25	2-1/4	6	0.40	100
SDBC-2.5	2-1/2	8	0.48	100
SDBC-3	3	8	0.66	70
SDBC-3.5	3-1/2	8	0.70	70
SDBC-4	4	24	1.02	40
SDBC-5	5	24	1.76	30
SDBC-6	6	30	2.00	20
SDBC-8	8	30	2.76	10
SDBC-10	10	30	3.46	10
SDBC-12	12	30	4.14	10

### For Clockwise Helix Hoses

*Designed to fit Tigerflex TR1 and THT-series hoses\**

Part Number	Fits Hose ID (in)	Torque (ft. lbs.)	Weight Each (lbs)	Standard Carton Qty.
▶ SDBCR-1.5	1-1/2	6	0.18	100
SDBCR-2	2	6	0.36	100
SDBCR-3	3	8	0.66	70
SDBCR-4	4	24	1.02	40
SDBCR-5	5	24	1.76	30
SDBCR-6	6	30	2.00	20
SDBCR-8	8	30	2.76	10
▶ SDBCR-10	10	30	3.46	10
▶ SDBCR-12	12	30	4.14	10

\*Refer to Tigerflex Accessories compatibility chart on pages 60-62.

### TigerClamp™ Stainless Steel Spiral Double Bolt Clamp (For Counterclockwise Spiral)

*Designed to Fit Most Tigerflex™ Hoses*

Part Number	Fits Hose ID (in)	Torque (ft. lbs.)	Weight Each (lbs)	Standard Carton Qty.
SDBC-SS-1.5	1-1/2	6	0.40	100
SDBC-SS-2	2	6	0.42	100
▶ SDBC-SS-2.5	2-1/2	8	0.53	100
SDBC-SS-3	3	8	0.88	50
▶ SDBC-SS-3.5	3-1/2	8	0.77	70
SDBC-SS-4	4	24	1.01	40
SDBC-SS-5	5	24	1.94	30
SDBC-SS-6	6	30	2.09	20
SDBC-SS-8	8	30	2.97	10
▶ SDBC-SS-10	10	30	3.81	10
▶ SDBC-SS-12	12	30	4.55	10

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

## Full Flow Swivel Coupling **NEW**

*Fits hoses: MULCH, MULCH-LT, BARK, LK and UV1*



### Aluminum Full-Flow Swivel Coupling Set (NPSM Threads)

Part Number	Size (in)	Weight Each (lbs)	Std. Carton
AL-MHS400	4	2.67	1

### Aluminum Full-Flow Coupling Male (NPSM Threads)



Part Number	Size (in)	Weight Each (lbs)	Std. Carton
AL-MHM400	4	0.93	1

### Aluminum Part D Coupler X Female (NPSM Threads)



Part Number	Size (in)	Weight Each (lbs)	Std. Carton
AL-MHD400	4	2.16	1

### Aluminum Part A Male Adapter X Female (NPSM Threads)



Part Number	Size (in)	Weight Each (lbs)	Std. Carton
AL-MHA400	4	1.58	1

# Tigerflex™ Accessories Compatability Chart

G = Suggested  
-- = Not Suggested

Series	Banding Coils			Banding Sleeves			Clamps		Cuff
	BCCF	BCWF	BCRT	SLV-VLT	SLV-DRP	SLV-VAP	SDBC	SDBC-R	A2150L1
2001-200	--	G	--	--	--	--	G	--	--
2001-300	G	G	--	--	--	--	G	--	--
2001-400	G	--	--	G	G	--	G	--	--
2001 other sizes	G	--	--	--	--	--	G	--	--
2020-300	G	--	--	--	G	--	G	--	--
2020-400	G	--	--	G	G	--	G	--	--
2020 other sizes	G	--	--	--	--	--	G	--	--
AMPH-BK400	G	--	--	--	--	--	G	--	--
AMPH-BK other sizes	G	--	--	--	--	--	G	--	--
BARK400	G	--	--	--	--	--	G	--	--
BARK500	G	--	--	--	--	--	G	--	--
BW500	--	--	--	--	--	--	G	--	--
BW600	--	--	--	--	--	--	G	--	--
BW other sizes	--	--	--	--	--	--	--	--	--
CF200	--	--	--	--	--	--	--	--	--
CF300	--	--	--	--	--	--	--	--	--
CF400	--	--	--	--	--	--	--	--	--
CF600	--	--	--	--	--	--	G	--	--
CF other sizes	--	--	--	--	--	--	--	--	--
F600	--	--	--	--	--	--	G	--	--
F800	G	--	--	--	--	--	G	--	--
F other sizes	--	--	--	--	--	--	--	--	--
FT all sizes	--	--	--	--	--	--	--	--	--
G600	--	--	--	--	--	--	G	--	--
G800	G	--	--	--	--	--	G	--	--
G other sizes	--	--	--	--	--	--	--	--	--
GC-C400	G	--	--	--	--	--	G	--	--
GC-C500	G	--	--	--	--	--	G	--	--
GC-C600	G	--	--	--	--	--	G	--	--
GT/GTG/GTFE150	G	--	--	--	--	--	G	--	G
GT/GTG/GTFE200	--	G	--	--	--	G	G	--	--
GT/GTG/GTFE300	--	G	--	--	--	G	G	--	--
GT/GTG/GTFE400	G	--	--	--	--	G	G	--	--
GT/GTG/GTFE other sizes	G	--	--	--	--	--	G	--	--
H600	--	--	--	--	--	--	G	--	--
H800	G	--	--	--	--	--	G	--	--
H other sizes	--	--	--	--	--	--	--	--	--
J600	--	--	--	--	--	--	G	--	--
J800	G	--	--	--	--	--	G	--	--
J other sizes	--	--	--	--	--	--	--	--	--
K600	--	--	--	--	--	--	G	--	--
K800	G	--	--	--	--	--	G	--	--
K other sizes	--	--	--	--	--	--	--	--	--
LK/LKC300	G	--	--	--	--	G	G	--	--
LK/LKC400	G	--	--	--	--	--	G	--	--
LK/LKC other sizes	G	--	--	--	--	--	G	--	--

**NOTE:** Banding coils and sleeves must be used in conjunction with a suitable hose clamp.  
Refer to individual accessory pages in our Kuriyama-Couplings™ Catalog for detailed information on size availability.

**CAUTION NOTE:** This chart is provided only as a guideline for selection of hose accessories. Actual results will vary due to manufacturing tolerances.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# Tigerflex™ Accessories Compatability Chart

G = Suggested  
-- = Not Suggested

Series	Banding Coils			Banding Sleeves			Clamps		Cuff A2150L1
	BCCF	BCWF	BCRT	SLV-VLT	SLV-DRP	SLV-VAP	SDBC	SDBC-R	
MH150	--	--	--	--	--	--	G	--	G
MH200	--	G	--	--	--	--	G	--	--
MH other sizes	--	--	--	--	--	--	--	--	--
MILK	--	--	--	--	--	--	--	--	--
MILK-LT	--	--	--	--	--	--	--	--	--
MULCH400	--	--	--	--	--	--	G	--	--
MULCH500	G	--	--	--	--	--	G	--	--
MULCH600	G	--	--	--	--	--	G	--	--
ORV all sizes	--	--	--	--	--	--	--	--	--
OV all sizes	--	--	--	--	--	--	--	--	--
PF300	G	--	--	--	--	--	G	--	--
PF400	G	--	--	G	G	--	G	--	--
PF other sizes	G	--	--	--	--	--	G	--	--
S300	--	--	--	--	--	--	G	--	--
S400	--	--	--	--	--	--	G	--	--
S other sizes	--	--	--	--	--	--	--	--	--
SH300	--	G	--	--	--	--	G	--	--
SH400	G	--	--	G	G	--	G	--	--
SH other sizes	G	--	--	--	--	--	G	--	--
TG/TY/TRED/TBLU all sizes	--	--	--	--	--	--	--	--	--
TR1-200	--	--	G	--	--	--	--	G	--
TR1-300	--	--	G	--	--	--	--	G	--
TR1-400	--	--	G	--	--	--	--	G	--
TR1 other sizes	--	--	--	--	--	--	--	G	--
TSD all sizes	--	--	--	--	--	--	--	--	--
UBK200	--	G	--	--	--	--	G	--	--
UBK300	--	G	--	--	--	--	G	--	--
UBK400	G	--	--	--	--	--	G	--	--
UBK other sizes	G	--	--	--	--	--	G	--	--
UF1-200	--	G	--	--	--	--	G	--	--
UF1-300	G	--	--	--	--	--	G	--	--
UF1-400	G	--	--	--	--	--	G	--	--
UF1 other sizes	G	--	--	--	--	--	G	--	--
UF2-200	--	G	--	--	--	--	G	--	--
UF2-300	G	--	--	--	G	--	G	--	--
UF2-400	G	--	--	G	G	--	G	--	--
UF2 other sizes	G	--	--	--	--	--	G	--	--
UFC200	--	G	--	--	--	--	G	--	--
UFC300	--	G	--	--	--	--	G	--	--
UFC400	G	--	--	--	--	--	G	--	--
UV1/UVF150	G	--	--	--	--	--	G	--	--
UV1/UVF200	--	G	--	--	--	G	G	--	--
UV1/UVF300	--	G	--	--	--	G	G	--	--
UV1/UVF400	G	--	--	--	--	G	G	--	--
UV2-200	G	--	--	--	--	G	G	--	--
UV2-400	G	G	X	X	X	G	G	X	X

**NOTE:** Banding coils and sleeves must be used in conjunction with a suitable hose clamp.  
Refer to the individual accessory pages in our Kuriyama-Couplings™ Catalog for detailed information on size availability.

**CAUTION NOTE:** This chart is provided only as a guideline for selection of hose accessories. Actual results will vary due to manufacturing tolerances.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Tigerflex™ Accessories Compatability Chart

G = Suggested  
-- = Not Suggested

Series	Banding Coils			Banding Sleeves			Clamps		Cuff
	BCCF	BCWF	BCRT	SLV-VLT	SLV-DRP	SLV-VAP	SDBC	SDBC-R	A2150L1
UV1/UVF/UVF other sizes	G	--	--	--	--	--	G	--	--
UV2-300	G	--	--	--	--	--	G	--	--
UV2 other sizes	G	--	--	--	--	--	G	--	--
UV3-300	G	G	--	--	--	G	G	--	--
UV3-400	G	--	--	--	--	--	G	--	--
UV3 other sizes	G	--	--	--	--	--	G	--	--
UVPE all sizes	--	--	--	--	--	--	G	--	--
VOLT200	G	--	--	--	--	G	G	--	--
VOLT300	G	G	--	--	--	G	G	--	--
VOLT400	G	--	--	G	G	--	G	--	--
VOLT other sizes	G	--	--	--	--	--	G	--	--
VLT-SD300	G	--	--	--	G	--	G	--	--
VLT-SD400	G	--	--	G	G	--	G	--	--
VLT-SD other sizes	G	--	--	--	--	--	G	--	--
W200	--	G	--	--	--	--	G	--	--
W300	--	G	--	--	--	--	G	--	--
W400	G	--	--	G	G	--	G	--	--
W other sizes	G	--	--	--	--	--	G	--	--
WBS200	--	G	--	--	--	--	G	--	--
WBS300	--	G	--	--	--	--	G	--	--
WBS400	G	--	--	--	--	--	G	--	--
WBS other sizes	G	--	--	--	--	--	G	--	--
WE200	--	G	--	--	--	--	G	--	--
WE300	--	G	--	--	G	--	G	--	--
WE400	G	--	--	--	--	--	G	--	--
WE other sizes	G	--	--	--	--	--	G	--	--
WG200	--	G	--	--	--	--	G	--	--
WG300	--	G	--	--	--	--	G	--	--
WG400	G	--	--	G	G	--	G	--	--
WG other sizes	G	--	--	--	--	--	G	--	--
WH200	--	G	--	--	--	--	G	--	--
WOR150	G	--	--	--	--	--	G	--	--
WOR200	--	G	--	--	--	G	G	--	--
WOR300	G	G	--	--	G	--	G	--	--
WOR400	G	--	--	G	G	--	G	--	--
WST/WSTF300	G	G	--	--	G	--	G	--	--
WST/WSTF400	G	G	--	G	G	--	G	--	--
WST/WSTF other sizes	G	--	--	--	--	--	G	--	--
WT200	--	G	--	--	--	--	G	--	--
WT300	G	G	--	--	--	--	G	--	--
WT400	G	--	--	G	G	--	G	--	--
WT other sizes	G	--	--	--	--	--	G	--	--

**NOTE:** Banding coils and sleeves must be used in conjunction with a suitable hose clamp.

Refer to the individual accessory pages in our Kuriyama-Couplings™ Catalog for detailed information on size availability.

**CAUTION NOTE:** This chart is provided only as a guideline for selection of hose accessories. Actual results will vary due to manufacturing tolerances.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Quality Assurance

## ISO 9001 Registration

Tigerflex™ hoses are manufactured with ISO 9001 registered quality management systems.

The ISO 9001 family of standards represents an international consensus on good manufacturing practices with the aim of ensuring that the organization consistently delivers the product or services that meet the customer's quality requirements.

ISO 9001 is a quality assurance model against which a plant's quality system can be independently audited.

## Compliance Footnotes for Tigerflex™ Catalog Products

- (01) 3A – Material approved by 3-A Sanitary Standards, Inc. for multi-use plastic materials, number: 20-25, as product contact surfaces in equipment for production, processing and handling of milk and milk products.
- (02) BSE/TSE – The majority of the raw materials used in our formulations are not manufactured or derived from materials of animal origin. Nor do our products come into contact with materials of animal origin during processing. Our suppliers of raw materials have assured us their compounds exceed the relevant European Guidance on minimizing the Risk of Transmitting Animal Spongiform Encephalopathy Agents Via Human and Veterinary Medical Products.
- (03) FDA – Material conforms to CFR title 21, parts 170-199.
- (04) FDA – Material conforms to CFR title 21, parts 177.1680 and 177.2600.
- (05) FDA – Material conforms to CFR title 21, parts 177.2600 and 175.105.
- (06) FDA – Material conforms to CFR title 21, parts 177.2800 (5)(i), 21 CFR 170.39.
- (07) MSHA – Hose approved by the United States Department of Labor's Mine Safety and Health Administration as having met Part 18, Title 30 CFR, and the Interim Fire Criteria for Acceptance of Products Taken into Underground Mines as water transfer hose.
- (08) MSHA – Hose approved by the United States Department of Labor's Mine Safety and Health Administration as having met the Interim Fire Criteria Acceptance of Products Taken Into Underground Mines as a hydraulic hose/hose bundle protection sleeve. Not intended for protection of electrical cables, and not intended for the repair or conveying of damaged hydraulic hoses.
- (09) NSF – Hose liner certified under NSF/ANSI/CAN 61 for use in potable water applications.
  - a) <http://info.nsf.org/Certified/PwsComponents/Listings.asp?Company=C0208288&Standard=061>
  - b) Material code PF2000
- (10) Phthalate Free – Manufactured from all phthalate free materials.
- (11) RoHS – The product complies with the requirements of the EU directive 2002/95/EC which is on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
- (12) USDA – Hose complies with applicable USDA requirements for use in federally inspected meat and poultry plants.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# Flexibility

The terms Flexibility and Minimum Bend Radius are often used interchangeably. However, while closely related, their meanings are different.

Minimum Bend Radius is generally defined as the smallest radius to which a hose can be bent without damage. Tigerflex™ defines damage as a 5% reduction of the hose OD at the bend point (before kinking/collapse). Other manufacturers may define damage as complete hose kinking/collapse.

Flexibility is defined as the amount of force required in order to bend the hose to a specified radius without kinking. In order to provide a better understanding of the flexibility of Tigerflex™ hoses we've performed extensive force-to-bend testing. This data provides a clearer picture of the actual flexibility of our hoses in order to assist in your hose selection process.

Food Grade			
Series	Force to Bend (lbs/F) *		
	2" ID x 3 ft	3" ID x 5 ft	4" ID x 7 ft
GTF/GTFE	0.3	0.8	3.5
UVF	2.5	3.6	5.5
WT	4.5	6.5	16.0
WE	5.5	8.8	21.4
2001	5.6	9.0	21.0
PF	-	13.0	19.0
WBS	5.5	13.1	22.0
WSTF	-	14.0	22.0
VOLT	7.8	15.0	22.0
MILK-LT	10.0	15.0	-
MILK	11.0	17.0	-
FT	13.0	24.0	41.0
2020	-	31.0	41.0
VLT-SD	-	33.0	42.4

Material Handling			
Series	Force to Bend (lbs/F) *		
	2" ID x 3 ft	3" ID x 5 ft	4" ID x 7 ft
UV2	3.4	5.5	7.0
BARK	-	-	7.6
MULCH-LT	-	-	8.0
TR1	3.4	5.0	8.0
GC-C	-	-	9.0
UBK	6	8	11.5
UV3	-	7.0	13.0
UFC	4.8	8.0	12.2
UF1	4.8	8.0	12.2
UVPE	5.5	7.5	-
AMPH-BK	5.5	10.0	15.5
UF2	5.5	10.1	17.2
MULCH	-	-	18.2
THT	-	10.8	18.9

Ducting			
Series	Force to Bend (lbs/F) *		
	2" ID x 3 ft	3" ID x 5 ft	4" ID x 7 ft
CG/CG-SL	0.5	1.2	2.1
GT/GTG	0.5	1.5	2.8
LK/LKC	-	1.8	3.0
UV1/UE	3.0	3.7	5.5

Liquid Suction			
Series	Force to Bend (Lbs./F) *		
	2" ID x 3 ft.	3" ID x 5 ft.	4" ID x 7 ft.
WH/SH	2.8	2.5	3.5
MH	2.8	-	-
WOR	2.8	5.3	10.0
W	4.0	9.5	7.3
WG	4.5	10.0	15.0
BW	7.8	12.3	19.5
ORV	10.0	12.0	-
TG/TY	12.0	11.2	22.0
TRED/TBLU	12.0	11.2	22.0
WST	-	14.0	21.0
CF	14.5	14.0	28.5
TSD	14.8	18.8	-
H/J/K	12.1	24.0	34.0
OV	19.0	29.0	-
S	24.6	29.0	35.5
F/G	26.0	31.0	47.0

A lower force-to-bend value indicates a more flexible hose.

\*Values listed indicated pounds of force required to bend a straight length of hose to 180° at 68°F.

These recommendations are based on our laboratory test reports which are, to the best of our knowledge, complete and accurate. However, actual hose force-to-bend requirements can vary due to many factors such as hose age and manufacturing tolerances. Therefore, no guarantee is expressed or implied by our publication of this chart. If doubt exists, we advise that a sample of the hose in question be obtained and tested under actual conditions. These values are provided for reference only and are subject to change.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Care and Maintenance

Hoses have a limited service life and users must be alert to signs of impending failure. Users of industrial hose should have safety and inspection procedures in place. Hose users should be trained how to properly inspect a hose for signs of impending failure. Hose should be routinely inspected for signs of damage.

Length of hose service life is affected by several factors including the type of material conveyed, pressure, vacuum, number and degree of bends, amount of flexing and exposure to environmental elements. Since we have no control over the way in which the hose is used, we do not warrant our hose for any particular service life.

Hoses and fittings should be routinely inspected for signs of damage, such as:

- Cuts, cracks, severe abrasions or holes in the hose tube, helical support or grounding wire
- Ovaling, kinking, bulging or any other deformation of the hose's normal shape
- Hardening or soft spots
- Flaking or chipping
- Misalignment or weakening of the coupling retention
- Fitting or clamp damage such as loose clamps, missing pins, worn threads excessive corrosion

If any of these signs of damage are observed, contact your hose supplier for replacement or repair.

## Recommended Practices

Hoses should only be used to convey materials compatible with hose construction. Refer to the Chemical Resistance and Application Guides in this catalog.

Hoses should not be used at levels that exceed their working pressure or vacuum ratings, and should not be subjected to severe pressure spikes or abrupt drops in pressure.

Hoses can sustain damage at high temperatures. Care should be exercised to not exceed the temperature limits of the hose. Hose should not be installed near sources of high heat.

Do not subject hose to abuse during service. Hose should not be thrown, dropped or subjected to severe impacts. Machinery should not be moved by pulling on the hose. Protect the hose from sharp edges and corners by using appropriate hose covers or sleeves.

Tigerflex hoses should not be installed underground as they are considered temporary connections.

Like other materials, Tigerflex hoses can be damaged by rodents or insects, including termites. Our warranty does not cover damages caused by them.


If hose is used in a suspended position it should be supported in multiple points with use of proper hose slings in order to evenly distribute the hose weight.

Hose should not be used in applications where hose failure would result in contents exposure to open flame or other ignition sources.

When not in service hoses should be drained and stored properly.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Storage and Handling

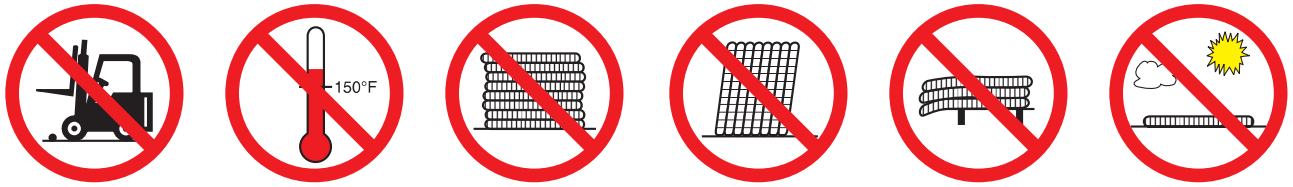

The following storage conditions and handling procedures can enhance and substantially extend the ultimate life of Tigerflex™ hose.

Upon receipt of Tigerflex™ product, skids should be broken down and product inspected for shipping damage. Skids are configured for shipping purposes only.

Hose should be stored indoors out of direct sunlight. Hose should be stored a minimum of ten feet from fluorescent light fixtures.

Hose should always be stored flat on smooth surfaces. Hose should not be stored on its side as this can cause the section of the hose resting on the ground to become deformed, or “egg shaped”.

Hose coils should not be stacked more than six coils high. Larger diameter hoses, 4” and above, should be stacked fewer than six coils high. Please refer to the following chart for recommended maximum stacking height requirements by hose size:

Hose Size (ID)	3/4”	1”	1-1/4”	1-1/2”	2”	2-1/2”	3”	4”	5”	6”	8”+
Max Coil Stack Height	6	6	6	6	6	6	6	5	3	2	1

Exceeding these coil stacking requirements may cause the compression load factor on the bottom coil to exceed the hose’s load limitations, causing the bottom coil to flatten out.

Hose should be pulled from inventory on a first-in, first-out (FIFO) basis.

During storage, hose should be kept in its original wrapping when possible, and kept free of dust and dirt.

Hose should not be exposed to water, oils, solvents, or corrosive liquids and fumes during storage. Hose should be protected from rodents and insects.

Rubber hoses should not be stored near electrical equipment. The motor in the equipment can generate ozone, which can attack and damage rubber hose.

Hose should not be subjected to extreme temperatures. Ideal hose storage temperature is between 50°F and 70°F, and ideally should not exceed 100°F. Be aware, when the air temperature is over 90°F outdoor ground surfaces such as asphalt, concrete and gravel can be in excess of 150°F. Such extreme heat conditions could reduce service life of thermoplastic products. Do not store hoses near heat sources such as heat vents, heaters or radiators. Hoses should not be exposed to dampness or high humidity during storage.

Hose should not be kinked or run over by any equipment. Do not drag the hose during storage & shipping. In the handling of larger ID hose, dollies should be used in transporting whenever possible. Slings or handling rigs, properly placed in multiple locations throughout the hose, should be used to support heavier hose. Hanging and supporting coils using forklift forks without protection may damages hose.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.




# The Effect of Temperature on Working Pressure & Vacuum Ratings

As a general rule, the working pressure and vacuum ratings for plastic reinforced hoses are based on room temperature conditions. The maximum allowable working pressure or vacuum/suction for a hose decreases as the temperature increases and the material becomes softer and more elastic. Excessive bending of a hose while in service can also

affect the allowable service application working pressure and vacuum.

Working pressure and vacuum ratings can be affected significantly by the type of fitting used, the method of attachment, and the temperature to which the hose assembly is exposed in service. The graph below demonstrates the overall trend.

**Pressure and vacuum hose strength decreases as temperature increases**

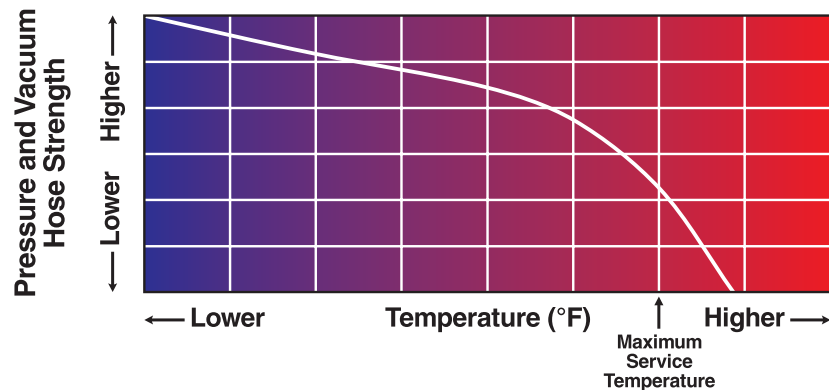

## Working Pressure Ratings

Working pressure and vacuum ratings are given in this catalog at 68°F and 104°F. Between 104°F and the maximum service temperature, it must be noted that a rapid decline in the pressure or vacuum rating of the hose may occur, and all factors relating to the hose, fittings and service conditions must be taken into consideration.

No warranty is expressed or implied, as

applications and methods of fitting installation may vary widely. Before placing a hose in service, the user must determine the suitability of the product under the correct working conditions, and assumes all risk and liability in connection therewith.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Chemical Resistance Guides

Many new materials have been developed to handle the wide range of modern chemicals being used in industry today. Many of these materials are now being used in the construction of Tigerflex™ hose.

The Chemical Resistance Guides which appears on the following pages have been prepared to assist the user in the selection of the correct hose for the application.

These recommendations are based on laboratory and test reports which are, to the best of our knowledge, complete and accurate. However, the degree of chemical resistance of any given material depends upon many variables, including such factors as length of exposure, temperature, pressure, fluid velocity, and chemical concentration.

Therefore, no guarantee is expressed or implied by our publication of these Chemical Resistance Guides. If an element of doubt exists, we advise that a sample of the specific hose selected be obtained and tested under actual conditions.

Furthermore, listings in these Chemical Resistance Guides do not imply conformance to any U. S. Department of Agriculture (USDA), Food and Drug Administration (FDA) or any other federal, provincial or state laws which may be applicable when handling food products. For information on the conformance of any specific hose product with FDA, USDA, or 3-A Sanitary Standards, please refer to the notes accompanying the information and specifications for each hose featured in this catalog.

Petroleum based fluids can impact the performance of a flexible PVC hose, therefore, service life may vary depending on the operating conditions and the type of material being conveyed.

## Warning

The Chemical Resistance Guides shown on the following pages are intended for general guidance only. The information contained therein is based upon tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No warranty is expressed or implied, as specific application parameters, such as temperature, pressure and chemical

concentrations vary widely. Furthermore, use of these hoses for handling multiple chemical products, either singly or as a mixture, may introduce uncontrollable factors relating to chemical resistance.

**Before using any hose, the user is responsible for determining the suitability of the hose for the intended application. Therefore, the user assumes all risk and responsibility for determining the suitability of any hose for handling any chemical or chemicals.**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# PVC and Polyurethane Chemical Resistance Guide

Key: E — Excellent

G — Good

L — Limited

U — Unsatisfactory

Material Handled	Hose Materials of Construction and Temperatures			
	PVC		Thermoplastic Polyurethane	
	68°F	104°F	68°F	104°F
Acetaldehyde	U	U	U	U
Acetaldehyde 40 Pct.	—	—	—	—
Acetate Solvents-Crude	U	U	L	U
Acetate Solvents-Pure	U	U	L	U
Acetic Acid 0-10 Pct.	G	L	U	U
Acetic Acid 10-20 Pct.	G	L	U	U
Acetic Acid 20-30 Pct.	G	L	U	U
Acetic Acid 30-60 Pct.	G	L	U	U
Acetic Acid 80 Pct.	L	L	U	U
Acetic Acid Vapors	G	G	U	U
Acetic Acid-Glacial	L	U	U	U
Acetic Anhydride	U	U	U	U
Acetone	U	U	L	U
Acetylene	E	E	E	E
Acrylonitrile	E	G	—	—
Adipic Acid	G	L	U	U
Alcohol (See Type)	—	—	—	—
Allyl Alcohol 96 Pct.	U	U	U	U
Allyl Chloride	L	L	U	U
Alum	E	E	E	E
Aluminum Acetate	G	L	—	—
Aluminum Chloride	E	E	L	L
Aluminum Fluoride	E	E	E	E
Aluminum Hydroxide	E	L	G	L
Aluminum Nitrate	E	E	E	E
Aluminum Oxalate	—	—	—	—
Aluminum Oxychloride	E	E	—	—
Aluminum Sulfate	E	E	E	E
Ammonia — Aqueous	L	U	L	U
Ammonia — Dry Gas	L	U	L	U
Ammonia-Liquid	U	U	L	U
Ammoniated Latex	E	L	—	—
Ammonium Bicarbonate	—	—	—	—
Ammonium Carbonate	E	E	E	E
Ammonium Chloride	E	E	G	L
Ammonium Fluoride 25 Pct.	U	U	L	U
Ammonium Hydrosulphide	—	—	—	—
Ammonium Hydroxide 28 Pct.	G	G	L	U
Ammonium Metaphosphate	E	E	G	G
Ammonium Nitrate	E	E	G	G
Ammonium Persulfate	E	E	G	G
Ammonium Phosphate	—	—	—	—
(Ammoniacal)	—	—	—	—
Ammonium Phosphate-Neutral	E	E	G	G
Ammonium Sulfate	E	E	E	E
Ammonium Sulfide	E	E	E	E
Ammonium Thiocyanate	E	E	G	G
Amyl Acetate	U	U	U	U
Amyl Alcohol	L	U	U	U
Amyl Chloride	U	U	—	—
Aniline	L	U	U	U
Aniline Chlorohydrate	U	U	U	U
Aniline Hydrochloride	U	U	U	U
Aniline Sulphate	—	—	—	—
Animal Oils	E	G	—	—
Anthraquinone	E	E	—	—
Anthraquinonesulfonic Acid	E	E	U	U
Antimony Pentacalcide	—	—	—	—
Antimony Trichloride	E	E	E	E
Apple (Sauce or Juice)	E	E	—	—
Aqua Regia	L	U	U	U
Aromatic Hydrocarbons	U	U	—	—
Arsenic Acid 80 Pct.	E	G	U	U
Arylsulfonic Acid	L	U	U	U
Asphalt	U	U	E	E
ASTM Fuel #1 Oil	G	L	E	E
ASTM Fuel #3 Oil	L	U	E	E
ASTM Fuel A	G	L	E	E
ASTM Fuel B	U	U	G	L
ASTM Fuel C	U	U	G	L
Baby Food	E	E	—	—
Barium Carbonate	E	E	E	E
Barium Chloride	E	E	E	E
Barium Hydroxide	E	E	G	L
Barium Sulfate	E	E	E	E
Barium Sulfide	E	E	E	E

Material Handled	Hose Materials of Construction and Temperatures			
	PVC		Thermoplastic Polyurethane	
	68°F	104°F	68°F	104°F
Barley	E	U	—	—
Beer	E	E	—	—
Beet-Sugar Liquor	E	E	—	—
Benzaldehyde	U	U	U	U
Benzene	U	U	L	U
Benzene-Sulfonic Acid 10 Pct.	E	E	U	U
Benzoic Acid	G	L	U	U
Benzol	U	U	L	U
Benzyl Alcohol	—	—	—	—
Berries	E	E	—	—
Bismuth Carbonate	E	E	E	E
Black Liquor (Paper industry)	E	E	—	—
Bleach-12.5 Pct. Active CL	G	L	L	U
Borax	E	G	E	E
Bordeaux Mixture	E	E	—	—
Boric Acid	E	E	U	U
Boron Trifluoride	E	E	E	E
Brine	E	E	G	U
Bromic Acid	E	L	U	U
Bromine-Liquid	U	U	U	U
Bromine-Water	U	U	U	U
Brussel Sprouts	E	E	—	—
Butadiene	L	U	—	—
Butane	E	E	E	E
Butanediol	—	—	—	—
Butanol-Primary	U	U	L	U
Butanol-Secondary	U	U	L	U
Butter	G	L	—	—
Butyl Acetate	U	U	L	U
Butyl Alcohol	E	L	L	U
Butyl Cellosolve	U	U	—	—
Butyl Phenol	L	U	—	—
Butylene	E	G	E	E
Butynedial (Erythritol)	U	U	U	U
Butyraldehyde	—	—	—	—
Butyric Acid 20 Pct.	L	U	L	U
Calcium Bisulfite	E	E	E	E
Calcium Carbonate	E	E	E	E
Calcium Chlorate	E	E	G	L
Calcium Chloride	E	E	L	U
Calcium Hydroxide	E	E	G	L
Calcium Hypochlorite	E	E	U	U
Calcium Nitrate	E	E	E	E
Calcium Phosphate	—	—	—	—
Calcium Sulfate	E	E	E	E
Camphor Oil	—	—	—	—
Cane Sugar Liquors	E	E	—	—
Carbon Bisulfide	U	U	—	—
Carbon Dioxide (Aqueous Solution)	E	E	E	E
Carbon Dioxide Gas (Wet)	E	E	E	E
Carbon Disulphide	U	U	—	—
Carbon Monoxide	E	E	E	E
Carbon Tetrachloride	U	U	L	U
Carbonic Acid	E	E	U	U
Carrots	E	E	—	—
Casein	E	G	E	E
Castor Oil	E	E	E	E
Catsup	E	G	—	—
Caustic Potash	E	E	L	U
Caustic Soda	L	L	L	U
Cellosolve	L	U	G	L
Cheese	E	G	—	—
Cherries	E	E	—	—
Chloracetic Acid	E	U	U	U
Chloral Hydrate	E	E	G	L
Chloric Acid 20 Pct.	E	E	U	U
Chlorinated Hydrocarbons	U	U	—	—
Chlorine Gas (Dry)	E	E	—	—
Chlorine Gas (Moist)	L	U	U	U
Chlorine Water 2 Pct.	L	U	L	U
Chlorine Water Saturated	—	—	—	—
Chlorobenzene	U	U	U	U
Chloroform	U	U	U	U
Chlorosulfonic Acid	L	U	U	U
Chocolate	G	L	—	—
Chrome Alum	E	E	E	E

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# PVC and Polyurethane Chemical Resistance Guide

Key: E — Excellent

G — Good

L — Limited

U — Unsatisfactory

Material Handled	Hose Materials of Construction and Temperatures			
	PVC		Thermoplastic Polyurethane	
	68°F	104°F	68°F	104°F
Chromic Acid 10 Pct.	G	L	U	U
Chromic Acid 25 Pct.	G	L	U	U
Chromic Acid 30 Pct.	L	U	U	U
Chromic Acid 40 Pct.	L	U	U	U
Chromic Acid 50 Pct.	L	U	U	U
Chromic Acid Plating Solution	—	—	U	U
Cider	—	—	—	—
Citric Acid	E	E	U	U
Coal Tar	U	U	U	U
Coconut Oil	L	U	E	E
Cola Drinks	E	E	—	—
Copper Chloride	E	G	E	E
Copper Cyanide	E	E	—	—
Copper Fluoride 2 Pct.	E	E	E	E
Copper Nitrate	E	G	E	E
Copper Sulfate	E	G	E	E
Core Oils	E	E	E	E
Corn Oils	E	G	—	—
Cottonseed Oil	G	L	E	E
Creosote	U	U	—	—
Cresol	U	U	L	U
Cresylic Acid 50 Pct.	U	U	U	U
Crude Oil-Sour	E	E	E	E
Crude Oil-Sweet	E	E	E	E
Cyclohexane	L	U	—	—
Cyclohexanol	U	U	L	U
Cyclohexanone	U	U	U	U
Demineralized Water	E	E	G	U
Detergents, Synthetic	E	G	—	—
Developers, Photographic	E	E	—	—
Dextrin	E	E	E	E
Dextrose	E	G	E	E
Di-acetone Alcohol	—	—	—	—
Di-isodecyl Phthalate	U	U	—	—
Diazo Salts	E	E	—	—
Dibutyl Phthalate	U	U	—	—
Dichlorobenzene	U	U	—	—
Diesel Oils	L	U	—	—
Diethyl Ether	—	—	—	—
Diethyl Ether	L	U	—	—
Diethylene Glycol	E	E	—	—
Diglycolic Acid	E	G	—	—
Dimethylamine	U	U	U	U
Diethyl Phthalate	U	U	—	—
Diethylphthalate	U	U	G	L
Disodium Phosphate	E	E	E	E
Distilled Water	E	E	G	U
Eggs (yolks or white)	E	E	—	—
Emulsifiers	E	E	—	—
Emulsions, Photographic	E	E	—	—
Ethers	U	U	G	L
Ethyl Acetate	U	U	L	U
Ethyl Acrylate	U	U	—	—
Ethyl Alcohol	G	L	—	—
Ethyl Alcohol 0-50 Pct.	G	L	G	L
Ethyl Alcohol 50-98 Pct.	L	U	L	U
Ethyl Butyrate	—	—	—	—
Ethyl Chloride	U	U	U	U
Ethyl Ether	U	U	G	L
Ethyl Formate	—	—	—	—
Ethylene Bromide	E	U	U	U
Ethylene Dichloride	U	U	U	U
Ethylene Glycol	E	E	G	L
Ethylene Oxide	U	U	U	U
Fatty Acids	E	G	G	L
Ferric Chloride	E	E	G	L
Ferric Nitrate	E	E	E	E
Ferric Sulfate	E	E	E	E
Ferrous Ammonium Citrate	—	—	—	—
Ferrous Chloride	E	E	E	E
Ferrous Sulfate	E	E	E	E
Figs	E	E	—	—
Fish Solubles	E	E	E	G
Fixing Solution Photographic	E	G	—	—
Flour	E	U	—	—
Fluorine Gas-Dry	U	U	U	U

Material Handled	Hose Materials of Construction and Temperatures			
	PVC		Thermoplastic Polyurethane	
	68°F	104°F	68°F	104°F
Fluorine Gas-Wet	U	U	U	U
Fluoroboric Acid	E	E	E	E
Fluorosilicic Acid	E	E	U	U
Fluorosilicic Acid 40 Pct.	—	—	—	—
Fluorosilicic Acid Concentrate	—	—	—	—
Food Products, such as Milk, Buttermilk, Molasses, Salad Oils, Fruit	E	E	—	—
Folic Acid	E	L	U	U
Formaldehyde 40 Pct. Aqueous	U	U	—	—
Formic Acid 10 Pct.	E	G	U	U
Formic Acid 100 Pct.	U	U	U	U
Formic Acid 25 Pct.	E	G	—	—
Formic Acid 3 Pct.	E	G	U	U
Formic Acid 50 Pct.	L	U	U	U
Freon-12	E	G	E	E
Fructose	E	E	E	E
Fruit Pulp and Juices	E	E	E	E
Fuel Oil	G	L	E	E
Furfural	U	U	U	U
Furfuryl Alcohol	E	L	—	—
Gallic Acid	E	E	—	—
Gas-Coke Oven	G	G	G	G
Gas-Manufactured	U	U	—	—
Gas-Natural (Dry)	E	E	E	E
Gas-Natural (Wet)	E	E	E	E
Gasoline	U	U	—	—
Gasoline – Refined	L	U	E	G
Gasoline – Sour	L	U	E	G
Gelatine	E	E	E	E
Gin	E	G	—	—
Ginger Ale	E	E	—	—
Glucose	E	E	E	E
Glycerine (Glycerol)	E	E	E	E
Glycol	E	E	G	G
Glycolic Acid 30 Pct.	E	E	U	U
Grade Sugar	—	—	—	—
Grape Juice	E	E	—	—
Grapefruit Juice	E	E	—	—
Grease	E	L	—	—
Green Liquor (Paper industry)	E	E	—	—
Heptachlor	E	L	—	—
Heptane	L	U	E	—
Hexadecanol	—	—	—	—
Hexane	L	U	—	—
Hexanol, Tertiary	L	U	G	—
Honey	E	E	—	—
Hydrochloric Acid 10 Pct.	E	E	U	U
Hydrochloric Acid 48 Pct.	E	L	U	U
Hydrocyanic Acid 10 Pct.	—	—	—	—
Hydrofluoric Acid 10 Pct.	G	L	U	U
Hydrofluoric Acid 4 Pct.	G	G	U	U
Hydrofluoric Acid 48 Pct.	G	U	U	U
Hydrofluoric Acid 60 Pct.	G	U	U	U
Hydrofluoroboric Acid	E	E	—	—
Hydrofluorosilicic Acid	G	L	U	U
Hydrogen	E	G	E	E
Hydrogen Bromide (Dry)	—	—	—	—
Hydrogen Chloride (Dry) (Liquid)	—	—	E	E
Hydrogen Cyanide	E	E	U	U
Hydrogen Peroxide 3 – 12 Pct.	E	G	—	—
Hydrogen Peroxide 30 Pct.	E	G	G	L
Hydrogen Peroxide 50 Pct.	E	L	L	U
Hydrogen Peroxide 90 Pct.	U	U	U	U
Hydrogen Phosphide	E	L	—	—
Hydrogen Sulfide – Aqueous Solution	E	E	—	—
Hydrogen Sulfide – Dry	E	E	—	—
Hydrombromic Acid 20 Pct.	E	G	U	U
Hydroquinone	E	E	E	E
Hydroxylamine Sulfate	E	E	—	—
Hypochlorous Acid	E	E	L	U
Inks	—	—	—	—
Iodine (In Alcohol)	U	U	U	U
Iso-octane	G	L	—	—
Isopropyl Acetate	U	U	—	—
Isopropyl Alcohol	E	G	—	—
Jelly	E	E	—	—

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# PVC and Polyurethane Chemical Resistance Guide

Key: E — Excellent

G — Good

L — Limited

U — Unsatisfactory

Material Handled	Hose Materials of Construction and Temperatures			
	PVC		Thermoplastic Polyurethane	
	68°F	104°F	68°F	104°F
Jet Fuels JP 3,4,5	U	U	G	L
Kerosene	U	U	E	G
Ketones	U	U	—	—
Kraft Liquor (Paper industry)	E	E	—	—
Lacquer Thinners	L	U	G	—
Lactic Acid 28 Pct.	E	E	U	U
Lard (marginal)	G	L	—	—
Lard Oil	E	G	E	G
Lauric Acid	E	E	L	U
Lauryl Chloride	E	E	E	G
Lauryl Sulfate	E	E	—	—
Lead Acetate	E	E	E	E
Lead Arsenate	—	—	—	—
Lead Nitrate	—	—	—	—
Lead Tetra-ethyl	—	—	—	—
Lemon Juice	E	G	—	—
Lime Sulfur	E	E	—	—
Linoleic Acid	E	E	L	U
Linseed Oil	E	E	E	E
Liquors (Chemical)	E	G	—	—
Lubricating Oils	U	U	E	E
Magnesium Carbonate	E	E	E	E
Magnesium Chloride	E	E	G	L
Magnesium Hydroxide	E	E	G	L
Magnesium Nitrate	E	E	E	E
Magnesium Sulfate	E	E	E	E
Maleic Acid 25 Pct. Aqueous	E	E	L	U
Maleic Acid 50 Pct.	—	—	—	—
Maleic Acid Concentrated	—	—	—	—
Malic Acid	E	E	L	U
Manganese Suphate	—	—	—	—
Mayonnaise	E	E	—	—
Mercuric Chloride	G	G	G	L
Mercuric Cyanide	G	G	—	—
Mercurous Nitrate	G	G	G	G
Mercury	G	G	—	—
Metallic Soaps	—	—	—	—
Methyl Acetate	U	U	—	—
Methyl Alcohol	L	U	L	U
Methyl Bromide	U	U	—	—
Methyl Chloride	U	U	U	U
Methyl Ethyl Ketone	U	U	L	U
Methyl Isobutyl Ketone	U	U	—	—
Methyl Sulfate	E	G	E	G
Methyl Sulfuric Acid	E	E	U	U
Methylated Spirit	—	—	—	—
Methylene Chloride	U	U	U	U
Milk	E	E	—	—
Mineral Oils	E	G	E	E
Mineral Spirits	—	—	—	—
Molasses	E	E	E	E
Monochlorobenzene	U	U	—	—
Naphtha	U	U	E	E
Naphthalene	L	U	—	—
Nickel Acetate	E	E	E	E
Nickel Chloride	E	E	E	E
Nickel Nitrate	E	E	E	E
Nickel Sulphate	E	E	E	E
Nicotine	E	E	E	E
Nicotine Acid	E	G	L	U
Nitric Acid (Anhydrous)	U	U	U	U
Nitric Acid 10 Pct.	E	G	U	U
Nitric Acid 25 Pct.	G	L	U	U
Nitric Acid 35 Pct.	G	L	U	U
Nitric Acid 40 Pct.	G	L	U	U
Nitric Acid 50 Pct.	—	—	—	—
Nitric Acid 60 Pct.	G	U	U	U
Nitric Acid 68 Pct.	L	U	U	U
Nitric Acid 70 Pct.	U	U	—	—
Nitrobenzene	U	U	U	U
Nitrous Oxide	E	E	E	E
Oats	E	U	—	—
Octyl Alcohol	—	—	—	—
Oils and Fats	U	U	E	E
Oils, Petroleum	U	U	E	E
Oleic Acid	U	U	U	U

Material Handled	Hose Materials of Construction and Temperatures			
	PVC		Thermoplastic Polyurethane	
	68°F	104°F	68°F	104°F
Oleum	U	U	U	U
Olives	E	E	—	—
Orange Juice	E	E	—	—
Oxalic Acid	E	E	U	U
Oxygen	E	E	E	E
Ozone	L	U	—	—
Palmitic Acid 10 Pct.	E	G	U	U
Palmitic Acid 70 Pct.	L	U	U	U
Paraffin	E	G	—	—
Peaches	E	E	—	—
Peanut Butter	E	G	—	—
Peas	E	E	—	—
Pentachlorophenol in Oil	G	L	—	—
Pentane	G	U	—	—
Peracetic Acid 40 Pct.	U	U	U	U
Perchloric Acid 10 Pct.	G	L	U	U
Perchloric Acid 70 Pct.	L	U	U	U
Perchlorethylene	U	U	—	—
Petrol	U	U	—	—
Petroleum Ether	L	L	—	—
Phenol	U	U	U	U
Phenylhydrazine	U	U	—	—
Phenylhydrazine Hydrochloride	L	U	—	—
Phosgene (Gas)	E	G	—	—
Phosgene (Liquid)	U	U	—	—
Phosphoric Acid — 0-25 Pct.	E	E	U	U
Phosphoric Acid — 25-50 Pct.	E	E	U	U
Phosphoric Acid — 50-90 Pct.	E	E	U	U
Phosphorus (Yellow)	G	L	—	—
Phosphorus Pentoxide	U	U	—	—
Phosphorus Trichloride	U	U	—	—
Photographic Chemicals	E	E	E	G
Photographic Developers	—	—	—	—
Photographic Emulsions	—	—	—	—
Photographic Fixers	—	—	—	—
Picric Acid	U	U	U	U
Pineapple Juice	E	E	—	—
Pitch	G	L	—	—
Plating Solutions	—	—	—	—
Brass	E	E	E	E
Cadmium	E	E	E	E
Chromium	G	G	G	G
Copper	E	E	E	E
Gold	E	E	E	E
Judium	E	E	E	E
Lead	E	E	E	E
Nickel	E	E	E	E
Rhodium	E	E	E	E
Silver	E	E	E	E
Tin	E	E	E	E
Zinc	E	G	E	E
Potassium Acid Sulfate	E	E	E	E
Potassium Antimonate	E	E	E	E
Potassium Bicarbonate	E	E	E	E
Potassium Bichromate	E	E	E	E
Potassium Bisulfite	E	E	E	E
Potassium Bisulphate	—	—	—	—
Potassium Borate 1 Pct.	E	E	E	E
Potassium Bromate 10 Pct.	E	E	E	E
Potassium Bromide	E	E	E	E
Potassium Carbonate	E	E	E	E
Potassium Chlorate	E	E	G	G
Potassium Chloride	E	E	E	G
Potassium Chromate 40 Pct.	E	E	G	G
Potassium Cuprocyanide	E	E	—	—
Potassium Cyanide	E	E	E	E
Potassium Dichromate 40 Pct.	E	E	G	G
Potassium Ferricyanide	E	E	E	E
Potassium Fluoride	E	E	E	G
Potassium Hydroxide 10 Pct.	E	E	L	U
Potassium Hydroxide 20 Pct.	E	E	U	U
Potassium Hydroxide 35 Pct.	E	E	U	U
Potassium Hydroxide Conc.	—	—	—	—
Potassium Hypochlorite	G	L	U	U
Potassium Nitrate	E	E	E	E
Potassium Perborate	E	E	E	E

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# PVC and Polyurethane Chemical Resistance Guide

Key: E — Excellent

G — Good

L — Limited

U — Unsatisfactory

Material Handled	Hose Materials of Construction and Temperatures			
	PVC		Thermoplastic Polyurethane	
	68°F	104°F	68°F	104°F
Potassium Perchlorate	E	E	G	L
Potassium Permanganate 10 Pct.	G	G	G	L
Potassium Persulfate	E	E	E	E
Potassium Phosphate	—	—	—	—
Potassium Sulfate	E	E	E	E
Potassium Sulfide	E	E	E	E
Potassium Thiosulfate	E	E	E	E
Potatoes	E	E	—	—
Propane	E	E	E	E
Propargyl Alcohol	E	E	—	—
Propyl Alcohol	E	L	G	L
Propylene Dichloride	U	U	U	U
Propylene Glycol	U	U	U	U
Prune Juice	E	E	—	—
Raisins	E	E	—	—
Ritchfield "A" Weed Killer	E	L	—	—
Salicylic Acid	—	—	—	—
Salt Water	E	E	G	U
Selenic Acid	E	G	U	U
Shortening	G	L	—	—
Silicic Acid	E	E	U	U
Silicone Fluids	—	—	—	—
Silver Cyanide	E	E	E	E
Silver Nitrate	E	E	E	E
Silver Plating Solutions	E	E	G	E
Soap Solution	E	E	G	U
Soda	E	E	—	—
Sodium Acetate	E	E	E	E
Sodium Acid Sulfate	E	E	E	E
Sodium Aluminate	—	—	—	—
Sodium Antimonate	E	E	E	E
Sodium Arsenite	E	E	E	E
Sodium Benzoate	E	G	E	E
Sodium Bicarbonate	E	E	E	E
Sodium Bisulfate	E	E	E	E
Sodium Bisulfite	E	E	E	E
Sodium Bromide	E	E	E	G
Sodium Carbonate (Soda Ash)	E	E	E	E
Sodium Chlorate	G	L	G	G
Sodium Chloride	E	E	E	G
Sodium Cyanide	E	E	E	E
Sodium Dichromate	E	G	E	G
Sodium Ferricyanide	E	E	E	E
Sodium Ferrocyanide	E	E	E	E
Sodium Fluoride	E	E	E	G
Sodium Hydroxide 10 Pct.	L	L	L	U
Sodium Hydroxide 35 Pct.	U	U	U	U
Sodium Hydroxide 50 Pct.	U	U	—	—
Sodium Hydroxide Saturated	E	E	U	U
Sodium Hypochlorite	E	E	U	U
Sodium Nitrate	E	E	E	E
Sodium Nitrite	E	E	E	E
Sodium Phosphate-Acid	G	G	U	U
Sodium Silicate	E	E	E	E
Sodium Sulfate	E	E	E	E
Sodium Sulfide	E	E	E	E
Sodium Sulfite	E	E	E	E
Sodium Thiosulfate (Hypo)	E	E	E	G
Soya Beans	E	U	—	—
Soya Oil	E	G	—	—
Soybean Oil	E	E	—	—
Spinach	E	E	—	—
Squash	E	E	—	—
Stannic Chloride	E	E	E	G
Stannous Chloride	E	G	E	G
Starch	—	—	—	—
Stearic Acid	E	G	L	U
Stoddard Solvent	L	U	G	G
Styrene	U	U	—	—
Sucrose	—	—	—	—
Sugar (All Forms)	E	E	—	—
Sulfur	G	G	—	—
Sulfuric Acid 0-10 Pct.	E	G	L	U
Sulfuric Acid 10-40 Pct.	E	G	U	U
Sulfuric Acid 50-60 Pct.	E	G	U	U
Sulfuric Acid 70 Pct.	E	G	U	U

Material Handled	Hose Materials of Construction and Temperatures			
	PVC		Thermoplastic Polyurethane	
	68°F	104°F	68°F	104°F
Sulfuric Acid 95 Pct.	U	U	U	U
Sulfuric Acid 95 Pct. to Fuming	L	L	U	U
Sulfurous Acid	G	L	U	U
Sulphur Dioxide Gas-Dry	E	E	—	—
Sulphur Dioxide Gas-Wet	U	U	—	—
Sulphur Dioxide-Liquid	L	U	—	—
Sulphur Trioxide	E	G	—	—
Sulphurous Acid 10 Pct.	—	—	—	—
Sulphurous Acid 30 Pct.	—	—	—	—
Tall Oil	U	U	—	—
Tallow	—	—	—	—
Tannic Acid	E	E	L	U
Tanning Extracts	—	—	—	—
Tanning Liquors	E	E	—	—
Tartaric Acid	E	G	L	U
Tea (Brewed)	E	E	—	—
Tetraethyl Lead	G	L	G	G
Tetrahydrofuran	U	U	U	U
Tetrahydronaphthalene	—	—	—	—
Thionyl Chloride	U	U	U	U
Tin Chloride	E	E	E	E
Titanium Tertachloride	E	U	L	U
Titanium Trichloride	—	—	—	—
Toluol or Toluene	U	U	L	U
Tomato Juice	E	E	—	—
Tomato Puree & Paste	E	E	—	—
Tomatoes	E	E	—	—
Transformer Oil	—	—	—	—
Tributyl Phosphate	U	U	—	—
Trichlorobenzene	—	—	—	—
Trichloroethylene	U	U	L	U
Tricresyl Phosphate	U	U	U	U
Triethanolamine	L	U	—	—
Triethylamine	G	L	—	—
Trimethyl Propane	L	U	—	—
Trisodium Phosphate	E	E	E	E
Turpentine	L	U	E	E
Urea	E	G	E	E
Urine	E	E	E	E
Vanilla Extract	—	—	—	—
Varnish	U	U	E	G
Vegetable Oils	G	L	—	—
Vinegar	E	G	G	L
Vinyl Acetate	U	U	U	U
Vinyl Chloride	U	U	—	—
Vodka	E	G	—	—
Water-Acid Mine Water	E	E	G	U
Water-Distilled	E	E	G	U
Water-Fresh	E	E	G	U
Water-Salt	E	E	G	U
Wetting Agents	—	—	—	—
Whey	—	—	—	—
Whiskey	E	G	—	—
White Gasoline	E	E	E	G
White Liquor (Paper industry)	E	E	—	—
Wines	E	G	—	—
Xylene or Xylol	U	U	G	L
Yeast	E	U	—	—
Yogurt	E	G	—	—
Zinc Chloride	E	E	E	E
Zinc Chromate	E	E	E	E
Zinc Cyanide	E	E	E	E
Zinc Nitrate	E	E	E	E
Zinc Sulfate	E	E	E	E
Mixtures of Acids:				
Nitric 15 Pct., Hydrofluoric 4 Pct.				
Sodium Dichromate 13 Pct., Nitric Acid 16 Pct., Water 71 Pct.				

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# EPDM Chemical Resistance Guide

Key: G — Good      L — Limited      U — Unsatisfactory

Material Handled	68°F	104°F	Material Handled	68°F	104°F	Material Handled	68°F	104°F
Acetic Acid	G	G	Development Sol.	L	L	Monochloro Benzene	U	U
Acetone	G	G	Dextrin	G	G	Nitric Acid - 5%	L	L
Aluminum Acetate	G	G	Dichlorethylene	U	U	- 50%	L	L
Aluminum Chloride	G	G	Dichloro Benzene	U	U	- 70%	U	U
Aluminum Hydroxide	G	G	Diethyl Ether	G	G	- 95%	U	U
Aluminum Sulfate	G	G	Emulsifier	G	G	Oleic Acid	L	L
Ammonia (Gas)	G	G	Ether	G	G	Ozone	G	G
Ammonia (Liquid)	G	G	Ethyl Acetate	L	L	Parraffin	U	U
Ammonium Acetate (Conc.)	G	G	Ethyl Alcohol - 6%	G	G	Perchlorethylene	U	U
Ammonium Chloride	G	G	- 100%	G	G	Phenol	L	L
Ammonium Hydroxide	G	G	Ethylene Chloride	L	L	Phosphoric Acid - 30%	G	G
Ammonium Nitrate	G	G	Ethylene Glycol	G	G	Photosensitive Emulsion	G	G
Aniline	L	L	Fluorine	U	U	Potassium Bichromate	U	U
Aniline Sulfate	U	U	Glycerol	G	G	Potassium Bromide	G	G
Barium Chloride	G	G	Grape Sugar	G	G	Potassium Chloride	G	G
Barium Hydroxide	G	G	Hormamide- 40%	G	G	Potassium Cyanide	G	G
Beer	G	G	Hydrochloric Acid - 10%	G	L	Potassium Fluoride	G	G
Benzen Alcohol	L	L	- 20%	G	L	Potassium Hydroxide - 10%	G	G
Benzene	U	U	Concentrate	G	L	(Conc.)	G	G
Bromine	U	U	Hydrogen	G	G	Potassium Permanganate	U	U
Butyl Alcohol	L	L	Hydrogen Chloride (Anhydrous)	G	L	Potassium Phosphate	G	G
Calcium Carbonate	G	G	Hydrogen Peroxide - 3%	U	U	Propylene Glycol	G	G
Calcium Chloride (Conc.)	G	G	- 30%	U	U	Sake (Alcohol)	G	G
Calcium Hyprocholate (Conc.)	L		(Above 80%)	U	U	Salt Water	G	G
Carbon Monoxide	G	G	Hydrogen Sulfide	G	G	Sauce	G	G
Carbon Tetrachloride	L	L	Iodine	U	U	Sodium Bicarbonate	G	G
Carbonic Acid	G	G	Iron Chloride	G	G	Sodium Chloride	G	G
Carbonic Acid Gas	G	G	Iron Sulfate	G	G	Sodium Hydroxide - 10%	G	G
Cetyl Alcohol	L	L	Isopropyl Alcohol	G	G	(Conc.)	G	G
Chlorine - 10% Gas	L	L	Magnesium Carbonate	G	G	Sodium Hypochlorite - 15%	G	G
- 100% Gas	L	L	Magnesium Chloride	G	G	Soy Sauce	G	G
(Solution)	L	L	Magnesium Hydroxide	G	G	Stearic acid	L	L
Chloroform	U	U	Magnesium Sulfate	G	G	Sulfur Dioxide	U	U
Chromate (Plating Solution)	L	L	Methanol - 20%	G	G	Sulfuric Acid	L	L
Citric Acid	G	G	Methyl Alcohol- 6%	G	G	Sulfurous Acid - 30%	L	L
Copper Chloride	G	G	- 100%	G	G	Tetrahydrofuron	L	L
Copper Nitrate	G	G	Methyl Ethel Ketone	G	G	Toluene	U	U
Copper Sulfate	G	G	Methylene Chloride	L	L	Transformer Oil	U	U
Creosote Oil	U	U	Mineral Oil	U	U	Water	G	G
						Zinc Chloride	G	G

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# SBR Chemical Resistance Guide

Key: G — Good      L — Limited      U — Unsatisfactory

Material Handled	68°F	Material Handled	68°F	Material Handled	68°F
1,1-dichloroethylene	U	Chromate (25%)	U	Methyl Ethyl Ketone (MEK)	U
1,2-dichloroethane	U	Citric Acid	G	Mineral Oil	U
Acetic Acid (10%)	L	Copper Chloride	G	Monochlorobenzene	U
Acetone	L	Copper Nitrate	G	Nitric Acid (5%)	U
Aluminum Acetate	L	Copper Sulfate	L	Nitric Acid (50%)	U
Aluminum Chloride	G	Creosote Oil	U	Nitric Acid (70%)	U
Aluminum Hydroxide	G	Dextrin	G	Nitric Acid (95%)	U
Aluminum Sulfide	L	Dichlorobenzene	U	Nitrous Acid (10%)	L
Ammonia (Gas)	G	Dichloromethane	U	Oleic Acid	U
Ammonia (Liquid)	G	Diethyl Ether	U	Oxalic Acid	L
Ammonium Acetate (Conc.)	G	Emulsifier	G	Ozone	U
Ammonium Bicarbonate	G	Ether	L	Paraffin	U
Ammonium Chloride	G	Ethyl Acetate	U	Perchloroethylene	U
Ammonium Hydroxide	U	Ethyl Alcohol (100%)	G	Phenol	U
Ammonium Nitrate	G	Ethyl Alcohol (6%)	G	Phosphoric Acid (30%)	U
Aniline	U	Ethylene Glycol	G	Potassium Bichromate	U
Aniline Sulfate	U	Fluorine	U	Potassium Bromide	G
Barium Chloride	G	Formaldehyde (40%)	L	Potassium Chloride	G
Barium Hydroxide	G	Glycerol	G	Potassium Cyanide	G
Beer	L	Grape Sugar	G	Potassium Fluoride	G
Benzene	U	Hydrochloric Acid (10%)	L	Potassium Hydroxide (10%)	L
Benzyl Alcohol	U	Hydrochloric Acid (20%)	L	Potassium Hydroxide (Conc.)	L
Bromine	U	Hydrochloric Acid (Conc.)	L	Potassium Permanganate	U
Butyl Alcohol	G	Hydrogen	L	Potassium Sulfate	G
Calcium Carbonate	G	Hydrogen Chloride (Anhydride)	L	Propylene Glycol	L
Calcium Chloride (Conc.)	G	Hydrogen Peroxide (3%)	U	Sake	G
Calcium Chloride (in 20% Mesh)	G	Hydrogen Peroxide (30%)	U	Salt Water	G
Calcium Hypochlorite (15% Cl <sub>2</sub> )	U	Hydrogen Peroxide (80% or more)	U	Sodium Bicarbonate	G
Calcium Hypochlorite (Conc.)	U	Hydrogen Sulfide	U	Sodium Chloride	G
Carbon Dioxide	U	Iodine	U	Sodium Hydroxide (10%)	G
Carbon Monoxide	L	Iron Chloride	G	Sodium Hydroxide (Conc.)	G
Carbon Tetrachloride	U	Iron Sulfate	G	Soy Sauce	G
Carbonic Acid	L	Isopropyl Alcohol	L	Stearic Acid	L
Carbonic Acid Gas	G	Magnesium Carbonate	G	Sulfuric Acid (10%)	U
Cetyl Alcohol	L	Magnesium Chloride	G	Tetrahydrofuran	U
Chlorine (10% Gas)	U	Magnesium Hydroxide	L	Toluene	U
Chlorine (100% Gas)	U	Magnesium Sulfate	L	Transformer Oil	U
Chlorine (Solution)	U	Methyl Alcohol (100%)	G	Water	G
Chloroform	U	Methyl Alcohol (6%)	G	Zinc chloride	G

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Tigerflex™ Products Custom Inquiry Form

## Company Profile

Company Name \_\_\_\_\_ Contact \_\_\_\_\_  
Address \_\_\_\_\_ City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_  
Phone \_\_\_\_\_ Fax \_\_\_\_\_ E-mail \_\_\_\_\_

## Application Details

Application \_\_\_\_\_  
\_\_\_\_\_ Indoor ☐ Outdoor ☐  
Material conveyed \_\_\_\_\_ Solid ☐ Liquid ☐ Gas ☐  
Type of fittings to be used \_\_\_\_\_

## Hose Construction

Hose style:

- Smooth profile (e.g. F series): ☐
- Convoluted profile (e.g. W series): ☐
- Externally reinforced (e.g. GT series): ☐
- Other: ☐ Describe \_\_\_\_\_

Similar to existing Tigerflex™ hose part number(s) (if applicable) \_\_\_\_\_

Flex material \_\_\_\_\_ Flex color \_\_\_\_\_ Food Grade? Yes ☐ No ☐

Helix material \_\_\_\_\_ Helix color \_\_\_\_\_ Food Grade? Yes ☐ No ☐

Yarn reinforcement? Yes ☐ No ☐ Polyurethane liner? Yes ☐ No ☐ Grounding wire? Yes ☐ No ☐

Hose size(s) (ID) \_\_\_\_\_

Required working pressure \_\_\_\_\_ PSI @ 68° F Required vacuum rating \_\_\_\_\_ in/g @ 68° F

Required bending radius \_\_\_\_\_ in Required hose weight \_\_\_\_\_ lbs

Hose Length \_\_\_\_\_ ft Tolerance +/- \_\_\_\_\_ in

Approvals required? \_\_\_\_\_

Other requirements \_\_\_\_\_

## Delivery Information

Estimated annual volume \_\_\_\_\_ Reoccurring? Yes ☐ No ☐ Required ship date \_\_\_\_\_

Special packaging or shipping requirements \_\_\_\_\_

## Submit to:

Fax: (847) 885-9010 • Email: customerservice@kuriyama.com • Submission date \_\_\_\_\_

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# Cautionary Statement

All Products sold and distributed by Kuriyama of America, Inc. are in the nature of commodities and they are sold by published specifications and not for particular purposes, uses or applications. Purchaser shall first determine their suitability for the intended purposes, uses or applications and shall either conduct its own engineering studies or tests, or retain qualified engineers, consultants or testing laboratories and consult with them before determining the proper use, suitability or propriety of the merchandise or Products for the intended purposes, uses or applications.

Kuriyama of America, Inc. ("Seller") does not recommend the Products for any particular purpose, use or application, and the Purchaser or user thereof shall assume full responsibility for the suitability, propriety, use and application of the Products. Purchaser shall follow all instructions contained in Seller's catalogs, brochures, technical bulletins and other documents regarding the Products. The Products, including but not limited to, hose, tubing or couplings, may fail due to the use or conveyance of substances at elevated or lowered temperatures or at excessive pressure, the conveyance of abrasive, injurious, flammable, explosive or damaging substances.

Hose or tubing used in bent configurations will be subjected to increased abrasion. Hose clamps or couplings may loosen after initial installation and all sections of hose and tubing including connections, couplings, clamps, conductivity and bonding should be inspected frequently, regularly and consistently, and should be replaced, adjusted or re-tightened for the avoidance of leakage, for the prevention of injuries or damages, and for general safety purposes. Except as indicated in its Limited Warranty, Seller shall not be liable or responsible for direct or indirect injuries or damages caused by or attributed to the failure or malfunction of any Products sold or distributed by it.

Purchasers or users of the Products should frequently and consistently undertake inspections and protective measures with respect to the use and application of Products, which should include the examination of tube and cover, conditions of the hose or tubing, and the identification, repair or replacement of sections showing cracking, blistering, separations, internal and external abrasions, leaking or slipped couplings or connections and make proper proof tests.

## Limited Warranty

The Products sold or distributed by Seller are warranted to its customers to be free from defects in material and workmanship at the time of shipment by us, subject to the following provisions. ALL WARRANTY CLAIMS SHALL BE MADE WITHIN SIX (6) MONTHS AFTER SELLER SHIPPED THE PRODUCTS. SELLER'S LIABILITY HEREUNDER IS LIMITED AT SELLER'S EXCLUSIVE DISCRETION, TO 1) THE PURCHASE PRICE OF ANY PRODUCTS PROVING DEFECTIVE; 2) REPAIR OF ANY DEFECTIVE PRODUCT OR PART THEREOF; OR 3) REPLACEMENT OF ANY DEFECTIVE PRODUCT OR PART UPON ITS AUTHORIZED RETURN TO SELLER.

THIS WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE CREATED UNDER APPLICABLE LAW INCLUDING, BUT NOT LIMITED TO, THE WARRANTY OF MERCHANTABILITY AND THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL SELLER OR THE MANUFACTURER OF THE PRODUCT BE LIABLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING LOSS OF PROFITS, WHETHER OR NOT CAUSED BY OR RESULTING FROM THE NEGLIGENCE OF SELLER AND/OR THE MANUFACTURER OF THE PRODUCT, UNLESS SPECIFICALLY PROVIDED HEREIN. IN ADDITION, THIS WARRANTY SHALL NOT APPLY TO ANY PRODUCTS OR PORTIONS THEREOF WHICH HAVE BEEN SUBJECTED TO ABUSE, MISUSE, IMPROPER INSTALLATION, MAINTENANCE, OR OPERATION, ELECTRICAL FAILURE OR ABNORMAL CONDITIONS, AND TO PRODUCTS WHICH HAVE BEEN TAMPERED WITH, ALTERED, MODIFIED, REPAIRED, REWORKED BY ANYONE NOT APPROVED BY SELLER, OR USED IN ANY MANNER INCONSISTENT WITH THE PROVISIONS OF THE "CAUTIONARY STATEMENT" ABOVE OR ANY INSTRUCTIONS OR SPECIFICATIONS PROVIDED WITH OR FOR THE PRODUCT. 05/03/21 REV

Distributed by:



**KURIYAMA**  
OF AMERICA, INC.

### HEADQUARTERS, SALES OFFICE AND WAREHOUSE

360 E. State Parkway, Schaumburg, IL 60173-5335  
Phone: (847) 755-0360 • Toll-free Fax: (800) 800-0320  
International Fax: (847) 885-0996



[kuriyama.com](http://kuriyama.com)



[sales@kuriyama.com](mailto:sales@kuriyama.com)



The trademarks contained in this publication are trademarks of Kuriyama of America, Inc.

## CONTACT OUR SALES/WAREHOUSE LOCATIONS BELOW WHICH SERVE YOUR AREA

### SOUTHWEST WAREHOUSE

**KURIYAMA OF AMERICA, INC.**

– HOUSTON

200 Portwall Street, Suite 100  
HOUSTON, TX 77029

Phone: (713) 674-8212

Toll Free Phone: (800) 501-6808

FAX: (713) 674-5214

Toll Free FAX: (800) 800-5214

E-Mail: [sales@kuriyama.com](mailto:sales@kuriyama.com)

### WESTERN WAREHOUSE

**KURIYAMA OF AMERICA, INC.**

– SANTA FE SPRINGS

10749 SHOEMAKER AVENUE

SANTA FE SPRINGS, CA 90670-4039

Phone: (562) 941-4507

FAX: (562) 941-8940

Toll-Free FAX: (800) 326-8940

E-Mail: [sales@kuriyama.com](mailto:sales@kuriyama.com)

### SOUTHEAST WAREHOUSE

**FORTNEY SALES CO., INC.**

4221 Cantrell Road NW

Acworth, GA 30101

Phone: (770) 427-6528

FAX: (770) 423-9249

Toll Free FAX: (800) 423-9249

Web Site: [www.fortneysales.com](http://www.fortneysales.com)

E-Mail: [sales@fortneysales.com](mailto:sales@fortneysales.com)

### EASTERN WAREHOUSE

**EASTERN RUBBER & PLASTICS CO., INC.**

100 GOLDMAN DR.

PLUMSTED INDUSTRIAL PARK

CREAM RIDGE, NJ 08514

Phone: (609) 758-0100

FAX: (609) 758-0102

Toll Free FAX: (800) 445-7138

Web Site: [www.easternrubber.com](http://www.easternrubber.com)

E-Mail: [sales@easternrubber.com](mailto:sales@easternrubber.com)

### IN MEXICO:

**KURIYAMA DE MÉXICO S DE RL DE CV**

AV JOSE PALOMO MARTINEZ NO 520-20 BODEGA 5

PARQUE INDUSTRIAL OMOLAP

APODACA, N.L. CP:66633, MÉXICO

Telefonos: (81) 1086-1870 0 71

Internet: [www.kuriyama.com.mx](http://www.kuriyama.com.mx)

[www.kuriyama.com](http://www.kuriyama.com)

Correo Electronico: [ventas@kuriyama.com](mailto:ventas@kuriyama.com)



**MADE IN THE  
USA**